

**South Dakota  
Ambient Air Monitoring  
Annual Plan  
2026**



**South Dakota  
Department of Agriculture and  
Natural Resources  
Air Quality Program**

## Table of Contents

Section	Page
Table of Contents .....	i
List of Tables .....	iv
List of Figures.....	v
Executive Summary .....	vii
<b>1.0 INTRODUCTION.....</b>	<b>1</b>
<b>2.0 AMBIENT AIR MONITORING NETWORK HISTORY .....</b>	<b>1</b>
<b>3.0 AIR MONITORING GOALS.....</b>	<b>3</b>
<b>4.0 AIR MONITORING PLAN.....</b>	<b>3</b>
4.1 State and Local Air Monitoring Stations.....	5
4.2 Special Purpose Monitoring.....	5
4.3 Prevention of Significant Deterioration Monitoring Sites .....	5
4.4 Interagency Monitoring of Protected Visual Environments Network.....	5
4.5 Environmental Radiation Network.....	5
4.6 National Core Multi-Pollutant Site .....	6
<b>5.0 AMBIENT AIR MONITORING NEEDS AND REQUIREMENTS.....</b>	<b>8</b>
5.1 Monitoring State’s Largest Population Centers .....	8
5.2 Real Time Data.....	9
5.3 Class I Areas.....	10
5.4 Metropolitan Statistical Areas .....	10
5.4.1 Required Ozone Monitoring Sites .....	11
5.4.2 Required PM <sub>10</sub> Monitoring Sites.....	12
5.4.3 Required PM <sub>2.5</sub> Monitoring Sites .....	13
5.4.4 Required Carbon Monoxide Monitoring Sites.....	14
5.4.5 Required Nitrogen Dioxide Monitoring Sites .....	15
5.4.6 Required Sulfur Dioxide Monitoring Sites .....	15
5.4.7 Required Lead Monitoring Sites.....	16
5.5 Additional Monitoring.....	17
5.6 Future Monitoring .....	17
<b>6.0 NETWORK MODIFICATIONS FOR 2026 .....</b>	<b>17</b>
6.1 New Sites .....	17
6.2 Sites Closed .....	17
6.3 Modifications.....	18
<b>7.0 REQUEST FOR WAIVER.....</b>	<b>18</b>
<b>8.0 EQUIPMENT REPLACEMENT PLAN.....</b>	<b>18</b>
8.1 Overview .....	18

8.2	Data Loggers.....	18
8.3	Manual Particulate Matter Monitors.....	19
	8.3.1 <i>Partisol Monitors</i> .....	19
	8.3.2 <i>Speciation PM<sub>2.5</sub> Monitors</i> .....	19
8.4	Continuous Particulate Matter Monitors .....	20
8.5	Continuous Gas Analyzers and Calibrators.....	21
	8.5.1 <i>Ozone Analyzers</i> .....	21
	8.5.2 <i>Sulfur Dioxide Analyzers</i> .....	22
	8.5.3 <i>Nitrogen Dioxide Analyzers</i> .....	22
	8.5.4 <i>Carbon Monoxide Analyzers</i> .....	23
	8.5.5 <i>Multi-gas &amp; Ozone Calibrators</i> .....	23
8.6	Zero Air Generators .....	24
8.7	Meteorological Stations .....	25
9.0	COMPLIANCE WITH NATIONAL AMBIENT AIR QUALITY STANDARDS ...	25
9.1	Particulate Matter (PM <sub>10</sub> ).....	25
9.2	Particulate Matter (PM <sub>2.5</sub> ).....	27
	9.2.1 <i>PM<sub>2.5</sub> 24-Hour Standard</i> .....	27
	9.2.2 <i>PM<sub>2.5</sub> Annual Standard</i> .....	29
9.3	Lead.....	30
9.4	Ozone.....	31
9.5	Sulfur Dioxide.....	32
	9.5.1 <i>Sulfur Dioxide 1-Hour Standard</i> .....	32
	9.5.2 <i>Sulfur Dioxide Annual Secondary Standard</i> .....	33
9.6	Nitrogen Dioxide .....	34
	9.6.1 <i>Nitrogen Dioxide 1-Hour Standard</i> .....	34
	9.6.2 <i>Nitrogen Dioxide Annual Standard</i> .....	35
9.7	Carbon Monoxide .....	36
9.8	2025 High Concentrations Summary .....	36
	9.8.1 <i>PM<sub>2.5</sub> High Concentration Days</i> .....	36
	9.8.2 <i>PM<sub>10</sub> High Concentration Days</i> .....	38
	9.8.3 <i>Ozone High Concentration Days</i> .....	38
10.0	AIR MONITORING SITE TRENDS .....	39
10.1	Credit Union Site.....	39
	10.1.1 <i>Credit Union Site PM<sub>10</sub> Data</i> .....	42
	10.1.2 <i>Credit Union Site PM<sub>2.5</sub> Data</i> .....	43
	10.1.3 <i>Credit Union Site Sulfur Dioxide Data</i> .....	44
	10.1.4 <i>Credit Union Site Nitrogen Dioxide Data</i> .....	45
10.2	Black Hawk Site .....	46
	10.2.1 <i>Black Hawk Site PM<sub>10</sub> Data</i> .....	48
	10.2.2 <i>Black Hawk Site Ozone Data</i> .....	49
10.3	Badlands Site .....	49
	10.3.1 <i>Badlands Site – PM<sub>10</sub> Data</i> .....	51
	10.3.2 <i>Badlands Site – PM<sub>2.5</sub> Data</i> .....	52

10.3.3	<i>Badlands Site Ozone Data</i> .....	53
10.4	<b>Wind Cave Site</b> .....	54
10.4.1	<i>Wind Cave Site PM<sub>10</sub> Data</i> .....	56
10.4.2	<i>Wind Cave Site PM<sub>2.5</sub> Data</i> .....	57
10.4.3	<i>Wind Cave Site Ozone Data</i> .....	58
10.5	<b>SF USD Site - Sioux Falls Area</b> .....	59
10.5.1	<i>SF USD Site PM<sub>10</sub> Data</i> .....	62
10.5.2	<i>SF USD Site – PM<sub>2.5</sub> Data</i> .....	62
10.5.3	<i>SF USD Site Ozone Data</i> .....	64
10.5.4	<i>SF USD Site Sulfur Dioxide Data</i> .....	65
10.5.5	<i>SF USD Nitrogen Dioxide Data</i> .....	65
10.5.6	<i>SD USD Site Carbon Monoxide Data</i> .....	66
10.6	<b>Aberdeen Bus Stop Site</b> .....	67
10.6.1	<i>Aberdeen Bus Stop Site PM<sub>10</sub> Data</i> .....	69
10.6.2	<i>Aberdeen Bus Stop Site PM<sub>2.5</sub> Data</i> .....	69
10.7	<b>Brookings Research Farm Site</b> .....	70
10.7.1	<i>Research Farm Site PM<sub>10</sub> Data</i> .....	72
10.7.2	<i>Research Farm Site PM<sub>2.5</sub> Data</i> .....	73
10.7.3	<i>Research Farm Site Ozone Data</i> .....	74
10.8	<b>Watertown Site</b> .....	75
10.8.1	<i>Watertown Site PM<sub>10</sub> Data</i> .....	76
10.8.2	<i>Watertown Site PM<sub>2.5</sub> Data</i> .....	77
10.8.3	<i>Watertown Site Ozone Data</i> .....	78
10.9	<b>Vermillion Site</b> .....	79
10.9.1	<i>Vermillion Site PM<sub>2.5</sub> Data</i> .....	81
10.9.2	<i>Vermillion Site Ozone Data</i> .....	82
10.10	<b>Pierre Airport Site</b> .....	82
10.10.1	<i>Pierre Airport Site – PM<sub>2.5</sub> Data</i> .....	84
11.0	<b>SPECIAL AIR QUALITY MONITORING</b> .....	85
11.1	<b>PM<sub>2.5</sub> Speciation Network</b> .....	85
12.0	<b>CONCLUSIONS</b> .....	85
13.0	<b>REFERENCES</b> .....	86

## List of Tables

Table	Page
Table 5-1 – 10 Largest Cities in South Dakota 2020.....	8
Table 5-2 – 10 Counties with the Highest Populations 2020.....	8
Table 5-3 – Minimum Ozone Sites Required.....	11
Table 5-4 – Minimum PM <sub>10</sub> Sites Required.....	13
Table 5-5 – Minimum PM <sub>2.5</sub> Sites Required.....	14
Table 5-6 – Population Weighted Emission Index.....	16
Table 8-1 - Data Logger Service Records.....	18
Table 8-2 – Partisol Service Record.....	19
Table 8-3 - BAM Service Record.....	20
Table 8-4 - Ozone Analyzers.....	21
Table 8-5 - Sulfur Dioxide Analyzers.....	22
Table 8-6 - Nitrogen Dioxide Analyzers.....	22
Table 8-7 - Carbon Monoxide Analyzers.....	23
Table 8-8 - Multi-gas Calibrators.....	23
Table 8-9 - Ozone Calibrators.....	24
Table 8-10 – Zero Air Generators.....	24
Table 9-1 – Statewide PM <sub>10</sub> 24-Hour Concentrations.....	26
Table 9-2 – Statewide PM <sub>2.5</sub> 24-Hour Concentrations.....	27
Table 9-3 – Statewide PM <sub>2.5</sub> Annual Concentrations.....	29
Table 9-4 – Statewide Ozone 4 <sup>th</sup> highest Concentrations.....	31
Table 9-5 – 2025 Statewide Sulfur Dioxide 1-hour Design Values.....	33
Table 9-6 – Nitrogen Dioxide 1-Hour 98 <sup>th</sup> Percentile Concentrations.....	34
Table 9-7 – 2025 High 24-Hour PM <sub>2.5</sub> Readings.....	37
Table 9-8 - 2025 High 24-Hour PM <sub>10</sub> Readings.....	38
Table 10-1 – Rapid City Credit Union Site Specifics.....	41
Table 10-2 – Black Hawk Site Specifics.....	47
Table 10-3 – Badlands Site Specifics.....	50
Table 10-4 – Wind Cave Site Specifics.....	55
Table 10-5 – SD School Site Specifics.....	60
Table 10-6 – Aberdeen Bus Stop Site Specifics.....	68
Table 10-7 –Research Farm Site Specifics.....	71
Table 10-8 – Watertown Site Specifics.....	76
Table 10-9 – Vermillion Site Specifics.....	80
Table 10-10 – Pierre Airport Site Specifics.....	83

## List of Figures

<b>Figure</b>	<b>Page</b>
Figure 4-1 – South Dakota Air Monitoring Sites.....	4
Figure 4-2 – SF USD Site Area Map.....	7
Figure 9-1 – 2025 PM <sub>2.5</sub> Statewide 24-Hour Design Values.....	28
Figure 9-2 – 2025 PM <sub>2.5</sub> Statewide Annual Design Values.....	30
Figure 9-3– 2025 Ozone Design Values Statewide.....	32
Figure 9-4– 2025 Sulfur Dioxide 1-Hour Concentrations.....	33
Figure 9-5 – Nitrogen Dioxide 1-hour Design Values 2025.....	35
Figure 9-6 – Nitrogen Dioxide Annual Concentration 2025.....	35
Figure 10-1 — Rapid City Credit Union Site.....	40
Figure 10-2 – Rapid City Credit Union Site PM <sub>10</sub> Annual Averages.....	42
Figure 10-3 – Rapid City Credit Union Site PM <sub>2.5</sub> Annual Averages.....	44
Figure 10-4 – Rapid City Credit Union Site Sulfur Dioxide 99 <sup>th</sup> Percentile 1-hour Averages ....	45
Figure 10-5 – Rapid City Credit Union Site Nitrogen Dioxide Annual Averages.....	46
Figure 10-6 – Black Hawk Site.....	47
Figure 10-7 – Black Hawk Site – PM <sub>10</sub> Annual Averages.....	48
Figure 10-8 – Black Hawk Site Ozone Yearly 4th Highest 8-hour Averages.....	49
Figure 10-9 –Badlands Site.....	50
Figure 10-10 – Badlands Site – PM <sub>10</sub> Annual Averages.....	52
Figure 10-11 – Badlands Site – PM <sub>2.5</sub> Annual Averages.....	53
Figure 10-12 – Badlands Site – Ozone Yearly 4th Highest 8-hour Averages.....	54
Figure 10-13 – Wind Cave Site.....	54
Figure 10-14 - Wind Cave Site – PM <sub>10</sub> Annual Averages.....	56
Figure 10-15 - Wind Cave Site – PM <sub>2.5</sub> Annual Averages.....	57
Figure 10-16 – Wind Cave Ozone Yearly 4th Highest 8-hour Averages.....	58
Figure 10-17 – SF USD Site.....	59
Figure 10-18 – SF USD Site – PM <sub>10</sub> Annual Averages.....	62
Figure 10-19 – SF USD Site – PM <sub>2.5</sub> Annual Averages.....	64
Figure 10-20 – SF USD Site - Ozone Yearly 4 <sup>th</sup> Highest 8-Hour Averages.....	64
Figure 10-21 – SF USD Site – Sulfur Dioxide Yearly 1-hour 99 <sup>th</sup> Percentile.....	65
Figure 10-22 – SF USD Site – Nitrogen Dioxide Annual Averages.....	66
Figure 10-23 – SF USD Site – Carbon Monoxide 8-hour averages.....	67
Figure 10-24 – Aberdeen’s Bus Stop Site.....	68
Figure 10-25 – Aberdeen Bus Stop Site – PM <sub>10</sub> Annual Averages.....	69
Figure 10-26 – Aberdeen Bus Stop Site – PM <sub>2.5</sub> Annual Averages.....	70
Figure 10-27 –Research Farm Site.....	71
Figure 10-28 –Research Farm Site – PM <sub>10</sub> Annual Averages.....	72
Figure 10-29 –Research Farm Site – PM <sub>2.5</sub> Annual Averages.....	73
Figure 10-30 – Brookings Research Farm Site Ozone Yearly 4th Highest 8-Hour Averages.....	74
Figure 10-31 – Watertown Site.....	75
Figure 10-32 – Watertown Site – PM <sub>10</sub> Annual Averages.....	77

Figure 10-33 – Watertown Site PM <sub>2.5</sub> Annual Averages .....	78
Figure 10-34 – Watertown Site Ozone Yearly 4th Highest 8-Hour Averages .....	79
Figure 10-35 – Vermillion Site .....	80
Figure 10-36 – Vermillion Site PM <sub>2.5</sub> Annual Averages .....	81
Figure 10-37 – Vermillion Site Ozone Yearly 4th Highest 8-Hour Averages .....	82
Figure 10-38 – Pierre Airport Site .....	83
Figure 10-39 – Pierre Airport Site – Annual PM <sub>2.5</sub> Concentrations .....	84

## **Executive Summary**

The South Dakota Department of Agriculture and Natural Resources (DANR) develops an annual ambient air monitoring network plan which is a review of the ambient air monitoring network each year as required by Title 40 of the Code of Federal Regulation (CFR), Part 58. All areas of the state are in attainment with the Environmental Protection Agency's (EPA's) National Ambient Air Quality Standards (NAAQS). The annual plan was published on the department's air quality website to provide for public review and comments for 30 days and no comments were received.

The annual plan includes the following major sections:

1. Ambient air monitoring goals, plans and needs are in Sections 3.0 through 5.0, respectively;
2. Proposed modifications to the ambient air monitoring network to meet the changing trends, national requirements, and state needs are in Section 6.0;
3. Sampling frequency waivers are identified in Section 7.0;
4. Purchase replacement plan is in Section 8.0;
5. Evaluation of collected data compared to the National Ambient Air Quality Standards is in Section 9.0;
6. Air pollution trends for each site are in Section 10.0; and
7. Special air quality monitoring is identified in Section 11.0.

The department is planning the following site modifications in 2026:

1. Continue replacing older continuous monitors before they become too expensive to repair and as resources allow;
2. Switch out old Thermo monitors to new Teledyne monitors;
3. Putting in new shelters at Watertown and Aberdeen;
4. Continue adding stairs at some of the sites including Watertown and Aberdeen; and
5. Replace Mesa Labs manual monitors at Sioux Falls NCore site with new MET One E-FRM-DC manual monitors.

## 1.0 INTRODUCTION

The United States Environmental Protection Agency through Title 40 of the Code of Federal Regulation and the Performance Partnership Agreement (PPA) requires the South Dakota Department of Agriculture and Natural Resources to complete an annual ambient air monitoring plan. EPA's requirements for the annual plan are listed in Title 40 of the Code of Federal Regulations §58.10. The plan will cover a review of the ambient air monitoring sites and determine if the network is meeting the monitoring objectives in Title 40 of the Code of Federal Regulations Part 58, Appendixes A, C, D, and E. The plan will identify needed modifications to the network such as the termination or relocation of a monitor, addition of new parameters, or the establishment of new stations. The plan will update compliance concentrations for comparison to the National Ambient Air Quality Standards and to determine trends for each sampling parameter.

The department is required to take public comments on the plan for 30 days prior to submitting the plan to EPA. The annual plan was published on the department's air quality website, <https://danr.sd.gov/Environment/AirQuality/default.aspx> and no comments were received. DANR has posted the finalized Annual Plan for 2026 on our webpage at: <https://danr.sd.gov/Environment/AirQuality/AirMonitoring/default.aspx>.

## 2.0 AMBIENT AIR MONITORING NETWORK HISTORY

In 1972, South Dakota developed, and EPA approved a State Implementation Plan (SIP) which included the establishment and operation of an ambient air monitoring network for the state. In 1980, South Dakota submitted a revision to its State Implementation Plan to upgrade the program by establishing a network of State and Local Air Monitoring (SLAMS) stations and Special Purpose Monitoring (SPM) stations.

In the past, EPA has changed the National Ambient Air Quality Standards several times. Currently, EPA has established National Ambient Air Quality Standards for Particulate Matter (PM), Sulfur Dioxide (SO<sub>2</sub>), Nitrogen Dioxide (NO<sub>2</sub>), Ozone, Carbon Monoxide (CO), and Lead.

The particulate matter 10 microns in diameter or less (PM<sub>10</sub>) standard was set in 1987 setting a 24-hour level of 150 micrograms per cubic meter (ug/m<sup>3</sup>) and an annual standard of 50 micrograms per cubic meter. In 2006, EPA revoked the annual standard leaving only the 24-hour standard. The department began monitoring for PM<sub>10</sub> in 1987, and for 2025 was monitoring PM<sub>10</sub> concentrations in Sioux Falls, Brookings, Watertown, Aberdeen, Badlands National Park, Wind Cave National Park, Black Hawk and Rapid City. The PM<sub>10</sub> monitoring network represents the most populated and rural areas of the state. South Dakota's ambient air monitoring network for PM<sub>10</sub> has historically demonstrated attainment with the PM<sub>10</sub> standards.

The particulate matter 2.5 microns in diameter or less (PM<sub>2.5</sub>) standards for 24-hour and annual levels were set in 1997. EPA revised the PM<sub>2.5</sub> standard significantly by reducing the 24-hour standard from 65 micrograms per cubic meter to 35 micrograms per cubic meter in 2006. The annual standard was revised from 15 micrograms per cubic meter to 12 micrograms per cubic

meter in 2013 and was lowered again in 2024 to 9 micrograms per cubic meter. The department began monitoring for PM<sub>2.5</sub> in 1999 and in 2025 was monitoring PM<sub>2.5</sub> concentrations in Sioux Falls, Brookings, Watertown, Vermillion, Aberdeen, Pierre, Badlands National Park, Wind Cave National Park, and Rapid City. The PM<sub>2.5</sub> monitoring network represents the most populated and rural areas of the state. South Dakota's ambient air monitoring network for PM<sub>2.5</sub> has historically demonstrated attainment with the PM<sub>2.5</sub> standards.

EPA set the first Sulfur Dioxide standards in 1971. The primary standards were 140 parts per billion for the 24-hour average and 30 parts per billion (ppb) for the annual average. The secondary standard was 500 parts per billion for the 3-hour average. The Sulfur Dioxide standard was revised in 2010 setting a new primary 1-hour standard of 75 parts per billion and revoking the 24-hour and annual standards. In 2024, the secondary standard was revised to an annual standard of 10 parts per billion (ppb), averaged over 3 years. The department began monitoring for Sulfur Dioxide in 1974, using bubbler method samplers. All the bubbler method samplers were closed out in the 1980s because of problems with the test method in cold climates and low concentration levels. In 2002, the program began setting up continuous analyzers and in 2025 operated Sulfur Dioxide analyzers in Sioux Falls and Rapid City. The Sulfur Dioxide monitoring network represents the highest population areas. South Dakota's ambient air monitoring network for Sulfur Dioxide has historically demonstrated attainment with the Sulfur Dioxide standards.

The Nitrogen Dioxide standard was established in 1971 setting an annual average standard of 53 parts per billion. In 2010, EPA revised the standard by adding a one-hour standard of 100 parts per billion. The annual standard was retained without any change in concentration level. The department first tested for Nitrogen Dioxide in 1974, using bubbler method samplers. All the bubbler method samplers were closed out in the 1980s because of problems with the test method in cold climates and low concentration levels. The department started testing again for Nitrogen Dioxide in 2003 and in 2025 operated continuous Nitrogen Dioxide monitors in Sioux Falls and Rapid City. The Nitrogen Dioxide monitoring network represents the most populated areas of the state. South Dakota's ambient air monitoring network for Nitrogen Dioxide has historically demonstrated attainment with the Nitrogen Dioxide standards.

The ozone standard was established in 1979, setting a 1-hour average standard of 0.120 parts per million (ppm). In 1997, the standard was revised setting an 8-hour average of 0.08 parts per million. In 2008, EPA revised the 8-hour average to 0.075 parts per million. In 2015, EPA set the current 8-hour average at 0.070 parts per million. South Dakota's ambient air monitoring network for ozone was established in 1999 and in 2025 monitored concentrations in Sioux Falls, Brookings, Watertown, Vermillion, Badlands National Park, Wind Cave National Park, and Black Hawk. The ozone monitoring network represents the highest population and three rural areas of the state. South Dakota's ambient air monitoring network for ozone has historically demonstrated attainment with the ozone standards.

The Carbon Monoxide standard was established in 1971. The primary and secondary standards were 35 parts per million for the 1-hour average and 9 parts per million for the 8-hour average. In 1985, the primary standards were retained without revision and the secondary standards were revoked. The department began monitoring for Carbon Monoxide in 2009 as part of collecting air monitoring data to show background levels for the criteria pollutants prior to the anticipated

construction of the Hyperion Energy Center. Three years of data was collected, and monitoring was discontinued in 2013 because the proposed project did not go through, and the collected sampling values were very low. A second site was added in 2011, at the SD School Site in Sioux Falls as part of the required testing at a National Core (NCore) site. In early 2021, the NCore site was moved to the USD Sioux Falls campus. South Dakota's ambient air monitoring network for Carbon Monoxide has historically demonstrated attainment with the Carbon Monoxide standards.

The lead standard was established in 1978, with a concentration of 1.5 micrograms per cubic meter. Testing was done in the 80's and 90's and results showed compliance with the standard. In 2008, the standard was significantly revised setting a concentration level of 0.15 micrograms per cubic meter. EPA made changes to the air monitoring requirements for lead in 2009 to help determine where states would need to test. The final rule did not require lead monitoring at the National Core site and all sources in South Dakota have emission levels less than 0.5 ton per year. Therefore, testing for lead is not required at this time. South Dakota's ambient air monitoring network for lead has historically demonstrated attainment with the lead standard.

Data collected from the ambient air monitoring network is entered into the federal database called the Air Quality System (AQS). Individuals interested in reviewing the air quality data can go to the EPA website at the following address: <https://www.epa.gov/outdoor-air-quality-data>

### **3.0 AIR MONITORING GOALS**

The department's Air Quality Program was established with the primary goal of protecting the health, welfare, and property of South Dakotans from the detrimental effects of air pollution. The Clean Air Act of 1970 and subsequent amendments define air quality standards for various air pollutants necessary to protect the public from injurious pollution concentrations.

In order to attain and maintain the National Ambient Air Quality Standards, the department developed regulations that restrict air pollution from sources, established these restrictions in an air quality permit, requires periodic inspections to ensure compliance, and maintains an ambient air monitoring network to provide air quality information and monitor the success of the Air Quality Program. Based on the ambient monitoring concentrations collected throughout the state, the department's Air Quality Program is meeting its goals.

### **4.0 AIR MONITORING PLAN**

In calendar year 2025, the ambient air monitoring network included eleven ambient air monitoring sites run by the department. There were two sites in Pierre, and one site in the remaining nine locations. Figure 4-1 shows a map of the general locations and cities with ambient air monitoring sites in 2025.

**Figure 4-1 – South Dakota Air Monitoring Sites**



The following types of ambient air monitors and monitoring sites may be operated in South Dakota:

1. State and local air monitoring stations;
2. Special purpose monitors;
3. Prevention of Significant Deterioration (PSD) monitors;
4. Interagency Monitoring of Protected Visual Environments (IMPROVE) sites;
5. Environmental Radiation Network (RadNet) ambient monitoring systems; and
6. National Core multi-pollutant sites.

Ambient air monitoring site files are maintained in the department's Pierre office for the state and local air monitoring stations, special purpose monitoring sites, and the National Core multi-pollutant site. The ambient air monitoring site files are available for public review during normal working hours from 8:00 AM to 5:00 PM each workday. The monitoring site files contain at a minimum the following information for each site:

1. Air Quality System site identification form;
2. Sampling location;
3. Sampling and analysis method;
4. Operating schedule;
5. Monitoring objective and spatial scale;
6. Beginning date of operation; and
7. Site maps.

#### **4.1 State and Local Air Monitoring Stations**

A state and local air monitoring station consists of an air monitor for at least one air pollutant parameter selected by the state or local air programs to determine compliance with the National Ambient Air Quality Standards. During 2025, ten of the network's sites were considered a state and local air monitoring station. The sites in the network collected PM<sub>10</sub> data at eight sites, PM<sub>2.5</sub> data at nine sites, Sulfur Dioxide and Nitrogen Dioxide at two sites, Ozone at seven sites, and Carbon Monoxide at one site.

#### **4.2 Special Purpose Monitoring**

Special Purpose Monitoring is a generic term for all monitors not used to determine compliance with the National Ambient Air Quality Standards and used for special studies. The data is reported to EPA, the equipment uses EPA or non-EPA designated monitoring methods, and the monitoring data is used for special circumstances or needs. In 2025, three of the ambient air monitoring network sites operated special purpose monitoring. The parameters tested by the special purpose monitoring in South Dakota include:

1. Weather stations at the Black Hawk and Sioux Falls sites;
2. PM<sub>coarse</sub> monitor, Total Reactive Nitrogen (NO<sub>y</sub>) analyzer, and PM<sub>2.5</sub> speciation monitors at the Sioux Falls NCore Site; and
3. Radiation monitor operated at the Pierre Quonset Site.

Particulate matter coarse (PM<sub>coarse</sub>) is particulate matter 10 microns in diameter or less (PM<sub>10</sub>) minus particulate matter 2.5 microns in diameter or less (PM<sub>2.5</sub>).

#### **4.3 Prevention of Significant Deterioration Monitoring Sites**

In 2025, no Prevention of Significant Deterioration air monitoring projects were started or completed.

#### **4.4 Interagency Monitoring of Protected Visual Environments Network**

Two Interagency Monitoring of Protected Visual Environments sites are being operated by the National Parks Service in South Dakota. The site locations are at the Badlands and Wind Cave National Parks. Data results for parameters collected by the National Park Service can be requested from the following website: <http://views.cira.colostate.edu/fed/>

#### **4.5 Environmental Radiation Network**

The Environmental Radiation Network site in Pierre is being operated as a part of the national network and is also considered a Special Purpose Monitoring Site. The Pierre Site has been operated since the early 1980s. The state has a limited role in operating the monitor. The state collects the samples and ships the samples to the EPA office of Radiation and Indoor Air. The type of sample collected is airborne particulates and measurements taken are gross beta radiation levels.

The general objectives of the sampling site are to provide a means of estimating ambient levels of radioactive pollutants in our environment, to follow trends in environmental radioactivity levels, and to assess the impact of fallout and other intrusions of radioactive materials. Specifically, the Radiation Network monitors were designed to:

1. Provide a direct assessment of the population's intake of radioactive pollutants due to fallout;
2. Provide data for developing a set of dose computational models for specific sources and a national dose computational model to aggregate all sources and determine total population dose;
3. Monitor pathways for significant population exposure from routine, accidental, and terrorist releases of radioactivity from major sources;
4. Provide data for indicating additional sampling needs or other actions required to ensure public health and environmental quality in the event of a major release of radioactivity to the environment; and
5. Serve as a reference for data comparison with other localized and limited monitoring programs.

The radiation data collected at this site may be reviewed at:  
<https://www.epa.gov/radnet>

#### **4.6 National Core Multi-Pollutant Site**


The National Core multi-pollutant monitoring site will provide data on several pollutants at lower detection levels and replaced the National Air Monitoring Station (NAMS) sites that had existed for several years. Each state's ambient air monitoring network is required to have at least one National Core site. The National Core site addresses the following monitoring objectives:

1. Timely reporting of data to the public through AirNow for air quality forecasting and other public reporting mechanisms;
2. Support development of emission strategies through air quality model evaluation and other observational methods;
3. Accountability of emission strategy progress through tracking long-term trends of criteria and non-criteria pollutants and their precursors;
4. Support long-term health assessments that contribute to ongoing reviews of the National Ambient Air Quality Standards;
5. Compliance through establishing nonattainment/attainment areas by comparison with the National Ambient Air Quality Standards; and
6. Support multiple disciplines of scientific research including public health, atmospheric and ecological.

The National Core site in South Dakota was located on the SD School for the Deaf campus in Sioux Falls, which was identified as the SD School Site (46-099-0008). The property at that location was sold. In early 2021, the National Core site transitioned to a new location on the USD Sioux Falls campus, which is identified at SF USD (46-099-0009). This site meets the location requirements to be in an urban residential area. Sioux Falls was selected as the National

Core site for South Dakota because it is the largest city in the state and is one of the state's fastest growing communities. See Figure 4-2 for an aerial view of the city around the SF USD Site (labeled as the University Center with the yellow square symbol).

**Figure 4-2 – SF USD Site Area Map**

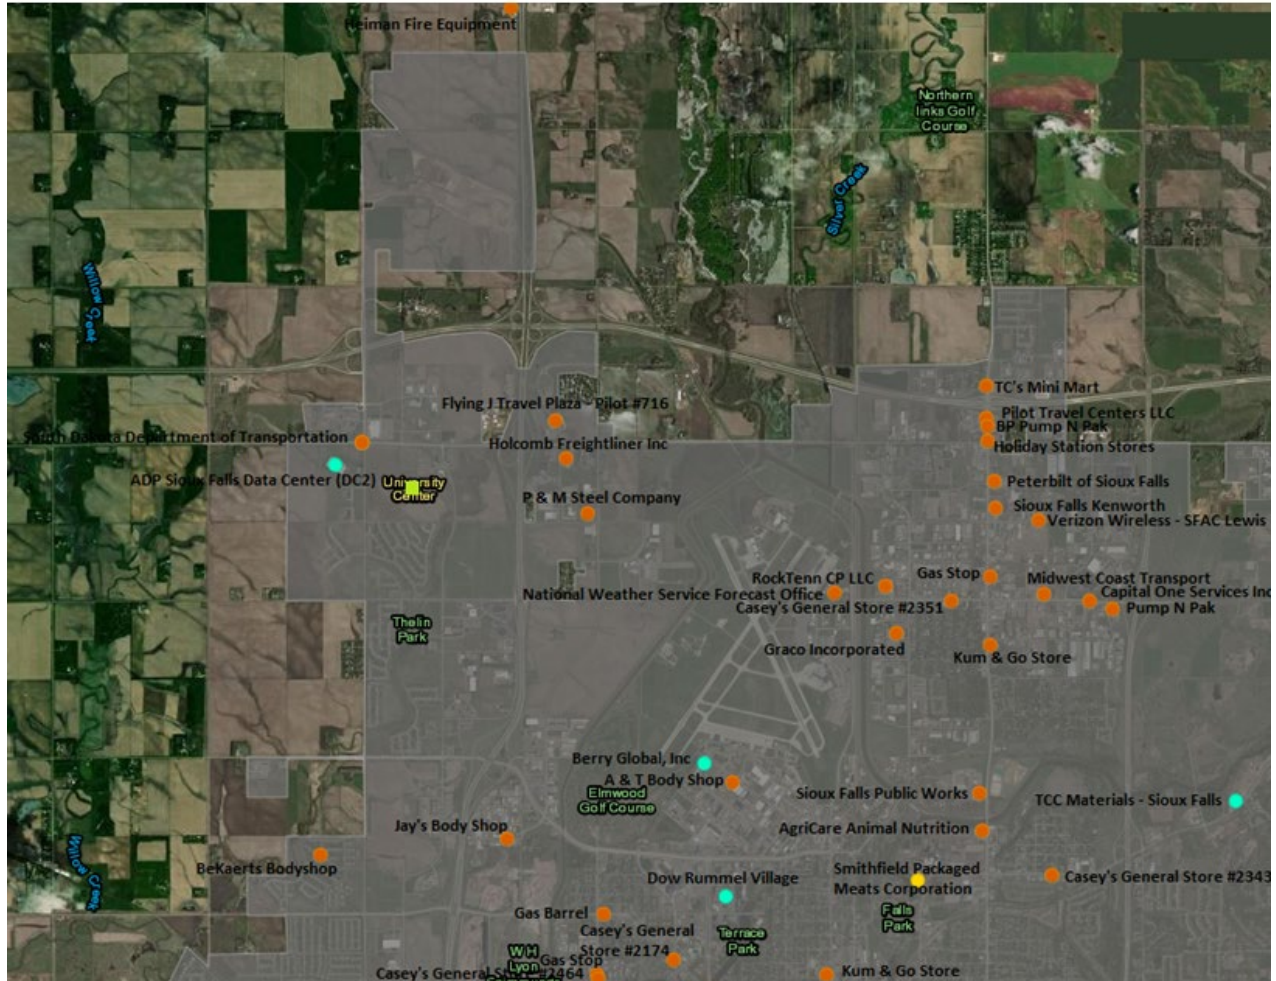

At the beginning of 2011, all required parameters were operating at the SD School Site. The SD School Site collected data for trace level Sulfur Dioxide, nitrogen oxides, all reactive oxides of nitrogen, Carbon Monoxide, ozone, PM<sub>2.5</sub> continuous and filter based manual monitors, PM<sub>coarse</sub>, PM<sub>2.5</sub> speciated, PM<sub>10</sub> and meteorological parameters of wind speed, wind direction, relative humidity, and ambient temperature. In March through June of 2021, all parameters were moved from the SD School Site to the new SF USD Site.

## 5.0 AMBIENT AIR MONITORING NEEDS AND REQUIREMENTS

### 5.1 Monitoring State’s Largest Population Centers

South Dakota's industrial base and population centers are typical of the northern plains’ states. The largest industry in the state is agriculture. Most of the other industries are in several localized areas. The industries in these locations are typically small (less than 50 employees) and generally do not produce large quantities of air pollutants. Most are considered service-oriented businesses or light industrial. The only heavy industrial facilities are the Big Stone Power Plant in Grant County and the quarry area in Rapid City.

The population distribution of the state follows the general industrial distribution. Most of the state's population of 886,667, from the 2020 Census, lives either on the eastern or western third of South Dakota. Since 2020, there has been a small population increase in South Dakota of about 5.5% according to estimates of 935,094 done in July 2025. The two largest cities in South Dakota are Sioux Falls and Rapid City located in southeastern and western South Dakota, respectively. The remaining population is primarily spread across the eastern third of the state with the remaining portion of the state sparsely populated. See Table 5-1 for a list of the 10 largest cities and Table 5-2 for a list of the 10 largest counties in the state.

**Table 5-1 – 10 Largest Cities in South Dakota 2020**

Ranking	City Name	Counties	Population
1	Sioux Falls	Minnehaha/Lincoln	180,927
2	Rapid City	Pennington /Meade	76,541
3	Aberdeen	Brown	28,315
4	Brookings	Brookings	24,479
5	Watertown	Codington	22,249
6	Mitchell	Davison	15,599
7	Yankton	Yankton	14,619
8	Pierre	Hughes	13,908
9	Huron	Beadle	13,289
10	Spearfish	Lawrence	11,702

**Table 5-2 – 10 Counties with the Highest Populations 2020**

Ranking	Counties	Population
1	Minnehaha	197,214
2	Pennington	109,222
3	Lincoln	65,161
4	Brown	38,301
5	Brookings	34,375
6	Meade	29,852
7	Codington	28,323
8	Lawrence	23,310
9	Yankton	23,310
10	Davison	19,956

Given South Dakota's population distribution, most of the air monitoring efforts of the state have in the past been concentrated in the areas of high population. Within these areas of high population, monitoring sites are chosen that will determine areas of high pollution concentration, determine if the National Ambient Air Quality Standards are being met, identify and attempt to quantify pollutant concentrations emitted by industries, and identify sources that have the potential to release the highest amounts of pollutants. A majority of the air monitoring sites are currently being operated in or near the five largest cities and seven largest counties in the state. However, as EPA continues to lower the National Ambient Air Quality Standards, the department has established some of the monitoring sites in rural areas such as the Wind Cave National Park, Badlands National Park, Vermillion, and Pierre. These sites are helping to determine long range impacts from other states and countries on South Dakota's rural and urban areas.

## **5.2 Real Time Data**

Air monitoring goals have shifted to the collection of data using continuous air monitoring samplers and providing the data as quickly as possible for the public to use. Continuous samplers provide more data at lower operational cost, which is necessary as EPA continues to expand ambient air monitoring programs for the same amount of funding or less. In many cases, the continuous monitoring can be accessed by modem and uploaded to a website for public use. The public can then use this data to determine if they need to take extra precautions when doing outdoor activities. The real time information is also used to monitor PM<sub>10</sub> and PM<sub>2.5</sub> concentrations when high wind dust alerts are forecasted for Rapid City and all parameters during national or international events such as wildfires that impact South Dakota.

The sites reporting data to the department's real time webpage in 2025 were Wind Cave National Park, Badlands National Park, Aberdeen, Brookings (Research Farm), Vermillion, Rapid City (Rapid City Credit Union and Black Hawk), Watertown, Pierre, and Sioux Falls (SF USD) sites. The data includes hourly concentrations of PM<sub>10</sub>, PM<sub>2.5</sub>, Sulfur Dioxide, Nitrogen Dioxide, Carbon Monoxide, and ozone. South Dakota's air quality real time website is located at: <https://denravweb.sd.gov/AirVision/default.aspx>.

In 2025, data uploaded from the PM<sub>2.5</sub> and PM<sub>10</sub> monitors and ozone analyzers at Wind Cave National Park, Badlands National Park, Aberdeen, Brookings Research Farm, Vermillion, Credit Union, Black Hawk, Watertown, Pierre, and SF USD sites were reporting hourly data to EPA's AirNow website located at: <https://www.airnow.gov/>

This data along with other monitoring sites around the nation provides the public and EPA with near real time data to show current air pollution levels and forecast levels for long range transport.

### 5.3 Class I Areas

With the development of coal bed methane and oil and gas production in North Dakota, Wyoming, Montana and Colorado there is still a need for data in rural and small cities in the western part of the state. In addition, South Dakota has developed a plan to implement the regional haze regulations required by the federal Clean Air Act. The implementation of these regulations will put more importance on air pollution levels in the state's two class I areas of Badlands and Wind Cave National Parks.

Ambient air monitors were placed in these areas in order to determine background levels and the impact of long-range transport of air pollutants like particulate matter and ozone. In addition, continuous data is needed for modeling purposes to help in determining air quality permit requirements. The National Park sites collect data from Interagency Monitoring of Protected Visual Environments monitors for PM<sub>10</sub>, PM<sub>2.5</sub>, and chemical analysis of the collected particulates. The department collected PM<sub>10</sub>, PM<sub>2.5</sub>, and ozone data at the Badlands Site and at the Wind Cave Site.

### 5.4 Metropolitan Statistical Areas

Title 40 of the Code of Federal Regulations Part 58, Appendix D, contains information used to design an ambient air monitoring network and lists three basic objectives in designing an ambient air monitoring network. The three basic objectives are listed below:

1. Provide air pollution data to the general public in a timely manner. The department accomplishes this objective by providing near real time data on the department's website at: <https://denravweb.sd.gov/AirVision/default.aspx>.

The sites reporting data to the department's real time webpage in 2025 were Wind Cave National Park, Badlands National Park, Aberdeen, Brookings (Research Farm), Vermillion, Rapid City (Credit Union and Black Hawk sites), Watertown, Pierre (Airport), and Sioux Falls (SF USD) sites. Specifically, in the Rapid City area, High Wind Dust Alerts are called when meteorological conditions are forecasted that could cause high PM<sub>10</sub> concentrations. This information along with a report graphing hourly concentrations recorded during the alert is also provided to the public through the department's website;

2. Support compliance with ambient air quality standards and emissions strategy development. The department accomplishes this objective by locating the sites throughout the state to assess the permit control measures and pollution emission impacts on the state. For example, the Rapid City air monitoring site specifically evaluates the permit control measures and the special measures taken to reduce fugitive dust levels; and
3. Support for air pollution research studies. The department supports research by loading the air quality data into EPA's Air Quality System database site and by supporting local studies when funding is available.

EPA identified in Appendix D the minimum number of air monitoring SLAM sites and requirements for ozone, carbon monoxide, nitrogen dioxide, sulfur dioxide, particulate matter, and lead.

#### 5.4.1 Required Ozone Monitoring Sites

The minimum number of required air monitoring sites for ozone is based on the population within a Metropolitan Statistical Area (MSA). There are three Metropolitan Statistical Areas in South Dakota. The Sioux Falls Metropolitan Statistical Area consists of Lincoln, McCook, Minnehaha, and Turner counties in South Dakota, as well as Rock County in Minnesota. The Rapid City Metropolitan Statistical Area consists of Meade and Pennington counties. Union County in South Dakota is part of the Sioux City Metropolitan Statistical Area which also includes Dakota County in Nebraska and Woodbury and Plymouth Counties in Iowa.

To determine the number of monitoring sites for ozone, the design value is calculated, divided by the standard, and the results multiplied by 100. If the Metropolitan Statistical Area has a design value greater than 85% of the standard one site is required. The required number of sampling sites continues to increase as the population increases. If the highest concentration site in a Metropolitan Statistical Area has a design value less than 85% for ozone, the required number of sites may be one or even zero depending on the design value and population of the Metropolitan Statistical Area.

The typical peak ozone concentrations are expressed in the percentage of the design value (see Table 9-4) of the National Ambient Air Quality Standard for ozone (0.070 parts per million). Table 5-3 shows the population, design values as percent of the National Ambient Air Quality Standards and the minimum number of ozone monitoring site required for the Sioux Falls, Rapid City, and Sioux City Metropolitan Statistical Areas after adding the data for the 2025 sampling year.

**Table 5-3 – Minimum Ozone Sites Required**

2025 MSA Population	Counties	Sites	AQS ID	Design Values as % of the NAAQS	> 85% Criteria (Yes or No)	Minimum Sites Required
<b>Sioux Falls MSA</b>						
314,638	Minnehaha, SD Lincoln, SD McCook, SD Turner, SD Rock, MN	SF USD	46-099-0009	Ozone 8-hr = (.069/.070)*100 = 99%	Yes	1
<b>Rapid City MSA</b>						
156,934	Pennington Meade	Black Hawk	46-093-0001	Ozone 8-hr = (.068/.070)*100 = 97%	Yes	1

2025 MSA Population	Counties	Sites	AQS ID	Design Values as % of the NAAQS	> 85% Criteria (Yes or No)	Minimum Sites Required
<b>Sioux City MSA</b>						
145,738	Union, SD Dakota, NE Woodbury, IA Plymouth, IA	Vermillion	46-027-0001	Ozone 8-hr = (.063/.070)*100 = 90% *	Yes*	1*

\*The Union County site closed after the third quarter of 2021, so the minimum sites required is being based on data at the Vermillion site.

There are two additional ambient air monitoring requirements in Appendix D for an ozone network. If a Metropolitan Statistical Area is required to have one or more ozone monitors, at least one of the ozone monitoring sites is required to be located at the expected high concentration area for the Metropolitan Statistical Area. The Sioux Falls and Rapid City Metropolitan Statistical Areas do not require more than one ozone monitoring site, but the department does locate the ozone monitoring site at the expected high concentration area. The expected high concentration area would be Sioux City, IA for the Sioux City Metropolitan Statistical Area. Ozone monitoring at a SLAMS monitoring site is only required during the ozone season which is the months of March through October in South Dakota. The department operates the ozone monitors all year round because the department has determined through experience that the monitors have less operational problems when operated continuously.

As a result of evaluating the air monitoring site data, based on the design values and populations, an ozone monitoring site is required in the Sioux Falls, Rapid City, and Sioux City Metropolitan Statistical Areas. Although Union County only represented a small percentage of the population of the Sioux City Metropolitan Statistical Area, the department had been operating one ozone monitoring site in Union County. The landowner did not want to continue the contract, and the Union County site was closed in 2021. A new site was opened in Vermillion. Since that time, a new site has opened in Stone State Park in Iowa to represent the needed monitoring for the Sioux City MSA.

#### **5.4.2 Required PM<sub>10</sub> Monitoring Sites**

The minimum number of PM<sub>10</sub> monitoring sites is based on the population of the Metropolitan Statistical Area and the PM<sub>10</sub> concentrations within the Metropolitan Statistical Area. The Rapid City and Sioux City Metropolitan Statistical Areas in South Dakota have a population between 100,000 to 250,000 and the Sioux Falls Metropolitan Statistical Area has a population between 250,000 and 500,000. To determine the number of monitoring sites for PM<sub>10</sub>, the maximum 24-hour concentration level at a site is divided by the standard (150 micrograms per cubic meter) and the results multiplied by 100. For the size of the Rapid City and Sioux City MSAs, if the percentage is over 120% of the standard, 1-2 sites are required; if the percentage is between 80% and 120% of the standard, 0-1 sites are required; and if the percentage is less than 80%, zero sites are required. For the size of the Sioux Falls MSA, if the percentage is over 120% of the standard, 3-4 sites are required; if the percentage is between 80% and 120% of the standard, 1-2 sites are required; and if the percentage is less than 80%, 0-1 sites are required.

Table 5-4 shows the population, the 24-hour maximum concentration as a percentage of the National Ambient Air Quality Standards, and the minimum site requirements for the Sioux Falls, Rapid City, and Sioux City Metropolitan Statistical Areas in the state.

**Table 5-4 – Minimum PM<sub>10</sub> Sites Required**

2025 MSA Population	Counties	Site	AQS ID	PM <sub>10</sub> Max Concentration as % of the NAAQS	> 80% Criteria (Yes or No)	Minimum Sites Required
<b>Sioux Falls MSA</b>						
314,638	Minnehaha Lincoln McCook Turner	SF USD	46-099-0009	(86/150) (100) 24-hour = 57%	No	0 - 1
<b>Rapid City MSA</b>						
156,934	Pennington Meade	RC Credit Union	46-103-0020	(168/150) (100) 24-hr = 112%	Yes	0-1
		Black Hawk	46-093-0001	(37/150) (100) 24-hr = 25%		
<b>Sioux City MSA</b>						
145,738	Union, SD Dixon, NE Dakota, NE Woodbury, IA	None	None	(92/150) (100) 24-hr = 61%	No*	0*

\* The Union County site closed after the third quarter of 2021, so the minimum sites required is being based on the estimated design value from 2019 - 2021.

### 5.4.3 Required PM<sub>2.5</sub> Monitoring Sites

The minimum number of required air monitoring sites for PM<sub>2.5</sub> is based on the population within a Metropolitan Statistical Area. As discussed for ozone monitoring sites, there are three Metropolitan Statistical Areas (Sioux Falls, Sioux City, and Rapid City) in South Dakota. All three Metropolitan Statistical Areas have a population from 50,000 to less than 500,000. In addition, each state must monitor for PM<sub>2.5</sub> at their NCore site.

If the Metropolitan Statistical Area has a design value (see Tables 9-2 and 9-3) greater than 85% of the PM<sub>2.5</sub> standards and the population is from 50,000 to less than 500,000 people, a minimum of one site is required. If the highest concentration site in a Metropolitan Statistical Area has a design value less than 85%, the minimum required number of sites for the above population range is zero.

Table 5-5 provides the data used to determine the minimum number of PM<sub>2.5</sub> monitoring sites in each Metropolitan Statistical Area. As a result of evaluating the air monitoring site data, based on the design values and populations, South Dakota is not required to have a monitoring site, but still needs one at the NCore site. The department will still operate a PM<sub>2.5</sub> monitor in the Rapid City MSA to monitor impacts from local, national, and international events. The landowner did not wish to continue the contract, so the Union County site was closed. A new site was opened in Vermillion.

**Table 5-5 – Minimum PM<sub>2.5</sub> Sites Required**

2025 MSA Population	Counties	Site	AQS ID	PM <sub>2.5</sub> Design Values as % of the NAAQS	> 85% Criteria (Yes or No)	Minimum Sites Required
<b>Sioux Falls MSA</b>						
314,638	Minnehaha Lincoln McCook Turner	SF USD	46-099-0009	24-hour = (23/35)*100 = 66%	No*	0
		SF USD	46-099-0009	Annual = (5.7/9)*100 = 63%	No	0
<b>Rapid City MSA</b>						
156,934	Pennington Meade	RC Credit Union	46-103-0020	24-hr = (23/35)*100 = 66%	No	0
		RC Credit Union	46-103-0020	Annual = (7.1/9)*100 = 79%	No	0
<b>Sioux City MSA</b>						
145,738	Union, SD Dixon, NE Dakota, NE Woodbury, IA	Vermillion	46-027-0001	24-hr = (25/35)*100 = 71%	No**	0
		Vermillion	46-027-0001	Annual = (6.7/9)*100 = 74%	No**	0

\* 2023 data did not meet completeness criteria.

\*\*The Union County site closed after the third quarter of 2021, so used data from the Vermillion site.

#### 5.4.4 Required Carbon Monoxide Monitoring Sites

The minimum monitoring requirement for Carbon Monoxide is based on core-based statistical areas (CBSA) which are established by the Office of Management and Budget. Core-based statistical areas are Metropolitan Statistical Areas (i.e., 50,000 or more populations).

A minimum of one Carbon Monoxide monitor is required to operate collocated with one required near-road Nitrogen Dioxide monitor in core-based statistical areas with a population greater 1,000,000 or more persons. None of the core-based statistical areas in South Dakota meet the population criteria. Therefore, no Carbon Monoxide monitoring is required under the minimum requirements, but Carbon Monoxide must be measured at the state's NCore site.

#### **5.4.5 Required Nitrogen Dioxide Monitoring Sites**

A minimum of one Nitrogen Dioxide monitor is required to operate at a microscale near-road monitoring station and at an expected highest Nitrogen Dioxide concentration representing the neighborhood or larger spatial scales in a core based statistical area with a population level of 1,000,000 or greater. None of the core-based statistical areas in South Dakota meet the population criteria. Therefore, no Nitrogen Dioxide monitoring is required under the minimum requirements, but Nitrogen Dioxide must be measured at the state's NCore site.

#### **5.4.6 Required Sulfur Dioxide Monitoring Sites**

Sulfur dioxide has a population-based monitoring requirement for a core-based statistical area (CBSA). The monitoring requirement is based on multiplying the total amount of sulfur dioxide, in tons per year, emitted within the counties in the core-based statistical area by the population within the core-based statistical area. The resulting product is divided by one million, providing the population weighted emissions index (PWEI) for the core-based statistical area.

A micropolitan statistical area is defined as a core-based statistical area with a population of greater than 10,000 but less than 50,000 people. A core-based statistical area with a population of 50,000 people or greater is defined as a metropolitan statistical area. In accordance with 40 CFR Part 58, Appendix D, Section 4.4.2, the state must operate a minimum number of sulfur dioxide monitoring sites, as described below:

- For any core-based statistical area with a calculated PWEI value equal to or greater than 1,000,000, a minimum of three SO<sub>2</sub> monitors are required within that CBSA;
- For any CBSA with a calculated PWEI value equal to or greater than 100,000, but less than 1,000,000, a minimum of two SO<sub>2</sub> monitors are required within that CBSA; and
- For any CBSA with a calculated PWEI value equal to or greater than 5,000, but less than 100,000, a minimum of one SO<sub>2</sub> monitor is required within that CBSA.

Table 5-6 provides the data used for calculating the population weighted emissions index (PWEI) for each core-based statistical area (CBSA) and Micropolitan area in South Dakota. The Sulfur Dioxide emissions were derived from EPA's 2023 National Emission Inventory. None of the PWEI values calculated are greater than 5,000. Therefore, no sulfur dioxide monitoring is required under the minimum requirements. However, in accordance with 40 CFR Part 58, Appendix D, Section 3(b), sulfur dioxide must be measured at the state's NCore site.

**Table 5-6 – Population Weighted Emission Index**

<b>CBSA</b>	<b>2025 Population</b>	<b>Counties</b>	<b>SO<sub>2</sub> Emissions</b>	<b>PWEI</b>
<i>Metropolitan Areas</i>				
Sioux Falls	310,571	Lincoln, McCook, Minnehaha, and Turner	223 tons per year	69
Sioux City	151,369	Union (SD), Dakota and Dixon (NE), and Woodbury (IA)	4,556 tons per year	690
Rapid City	147,819	Meade and Pennington	302 tons per year	45
<i>Micropolitan Areas</i>				
Aberdeen	41,514	Brown and Edmunds	79.1 tons per year	3
Brookings	38456	Brookings	38.5 tons per year	1
Huron	19726	Beadle	10.5 tons per year	0
Mitchell	23,559	Davison and Hanson	13.5 tons per year	0
Pierre	20,618	Hughes and Stanley	5.3 tons per year	0
Spearfish	30,209	Lawrence	72.8 tons per year	2
Vermillion	14872	Clay	8.4 tons per year	0
Watertown	36,924	Codington and Hamlin	35.5 tons per year	1
Yankton	23,693	Yankton	19.4 tons per year	0

#### **5.4.7 Required Lead Monitoring Sites**

In 2010, EPA completed a rule change that required source type testing in addition to network testing. The rule originally required lead testing at the National Core Site. The final rule required lead testing at the National Core Site only if the site is in a city with a 500,000 and greater population. The National Core site is in Sioux Falls and the city has a population under 500,000 so no testing is required.

The department is also required to conduct ambient lead monitoring near lead sources which are expected to or have been shown to contribute to a maximum lead concentration in the ambient air in excess of the National Ambient Air Quality Standards. South Dakota is in attainment of the National Ambient Air Quality Standard for lead. At a minimum, there must be one source-orientated monitoring site located to measure the maximum lead concentration in the ambient air resulting from each non-airport lead source which emits 0.50 or more tons per year and from each airport which emits 1.0 or more tons per year based on the most recent National Emission Inventory or other scientifically justifiable methods and data. Based on EPA's 2023 National Emission Inventory, there are no sources that emit 0.50 or more tons per year and no airports that emit 1.0 or more tons per year. Therefore, lead monitoring is not required in South Dakota.

## **5.5 Additional Monitoring**

The department operates the following additional types of monitors to meet the specific network requirements in 40 Code of Federal Regulations Part 58, Appendix D:

1. PM<sub>2.5</sub> background and transport monitors at the Badlands and Wind Cave sites; and
2. National Core monitoring equipment located in the city of Sioux Falls at the SF USD Site. Each State is required to operate at least one NCore site. The NCore sites must measure, at a minimum, PM<sub>2.5</sub> particle mass using continuous and integrated/filter-based samplers, speciated PM<sub>2.5</sub>, PM<sub>coarse</sub> particle mass, ozone, Sulfur Dioxide, Carbon Monoxide, and Nitrogen Oxide/Total Reactive Nitrogen (NO/NO<sub>y</sub>), wind speed, wind direction, relative humidity, and ambient temperature.

Another requirement in Appendix D is providing for a Photochemical Assessment Monitoring Stations (PAMS) which is required in areas classified as serious, severe, or extreme nonattainment for ozone. All areas in South Dakota are attaining the National Ambient Air Quality standard for ozone, so no Photochemical Assessment Monitoring Stations sites are required.

## **5.6 Future Monitoring**

There is currently minimal monitoring being completed in other parts of the state that have small but expanding populations and industries. These areas include the northeastern and the northern Black Hills portions of the state. These areas will continue to be evaluated to determine whether additional monitoring efforts need to be conducted in those areas.

PM<sub>10</sub>, PM<sub>2.5</sub> and ozone will be the focus of the ambient air monitoring network as levels of these pollutants have the greatest potential to have concentrations close to the standard as EPA continues to lower the National Ambient Air Quality Standards for these pollutants.

## **6.0 NETWORK MODIFICATIONS FOR 2026**

The department will continue to evaluate the air monitoring network in 2026 to determine if any new sites are needed and/or existing sites need to be modified or closed to meet the needs of South Dakota and or federal requirements.

### **6.1 New Sites**

In 2026, we plan on replacing the monitoring sites in Aberdeen and Watertown.

### **6.2 Sites Closed**

In 2026, we plan on replacing the monitoring sites in Aberdeen and Watertown.

### 6.3 Modifications

The department will continue to update older continuous style monitors with newer monitors. Shelters will be replaced at some sites and stairs will be added at some sites.

## 7.0 REQUEST FOR WAIVER

There were no sampling frequency waivers requested for the 2025 sampling year.

## 8.0 EQUIPMENT REPLACEMENT PLAN

### 8.1 Overview

The department is tasked with sampling the ambient air quality throughout the state of South Dakota to demonstrate compliance with the National Ambient Air Quality Standards, and to do special testing when needs arise or as required by EPA. At the beginning of 2025, there were 11 active sites within South Dakota where either environmental radiation or criteria pollutants were monitored. The monitoring sites are located in the cities of Black Hawk, Rapid City, Pierre, Aberdeen, Watertown, Brookings, Sioux Falls, and Vermillion, and also located at Badlands National Park and Wind Cave National Park. The monitored pollutants include environmental radiation, particulate matter (PM<sub>10</sub> and PM<sub>2.5</sub>), Nitrogen Dioxide, Ozone, Carbon Monoxide, and Sulfur Dioxide.

The reliable operation of the monitors requires significant investment in staff time and inventory for upkeep, both of which tend to increase as the monitors age. Monitors should be replaced when they reach an age when cost of upkeep meets or exceeds the cost of new purchase and when funding permits. Monitors also experience catastrophic failures, at which time a determination is made whether replacing core components on an aging instrument is viable. Furthermore, the age of some instruments makes sourcing parts difficult or impossible, as they may no longer be supported by the manufacturer.

### 8.2 Data Loggers

In 2025, the department operated one ESC 8832 style data loggers and nine 8864 data loggers. These data loggers are necessary at each site which has continuous monitoring equipment, to provide near real-time data to the public. The department has one 8864 data logger to install at the Brookings site to complete the monitoring networks upgrades from the 8832 data loggers. Table 8-1 provides the department's list of data loggers for 2025.

**Table 8-1 - Data Logger Service Records**

No.	Serial #	Model	Purchased	Location
1	A2772K	8832	2008	Sioux Falls (Spare)
2	A2771K	8832	2008	Vermillion (Spare)
3	A2331K	8832	2008	Sioux Falls (Spare)
4	A2431K	8832	2008	Brookings

No.	Serial #	Model	Purchased	Location
5	A2770K	8832	2008	Credit Union (Spare)
6	A3705K	8832	2008	Pierre Lab
7	A3119K	8832	2008	Pierre Lab
8	A3992K	8832	2011	Pierre Lab
9	A4467K	8832	2012	Black Hawk (Spare)
10	A4868K	8832	2012	Wind Cave
11	C2718	8864	2020	Sioux Falls
12	C3013	8864	2022	Credit Union
13	C3014	8864	2022	Watertown
14	C3015	8864	2022	Black Hawk
15	C3016	8864	2022	Wind Cave
16	C3017	8864	2022	Badlands
17	C3018	8864	2022	Aberdeen
18	C3019	8864	2022	Vermillion
19	C3098	8864	2022	Brookings
20	G20123	8864	2023	Pierre

### 8.3 Manual Particulate Matter Monitors

#### 8.3.1 Partisol Monitors

The department purchased and installed two BGI PQ200s at the Sioux Falls site in 2024. Throughout 2025, the PQ200s had many issues requiring the Partisol 2000s to be swapped in and out during repairs. The partisol monitors have an average expected longevity of 10-15 years. The department continues to experience a high rate of repair and plans to replace the PQ200s due to continuous problems. The three Thermo Scientific Partisol 2000 manual monitors (see Table 8-2) will be stored and used as backups for the BGIs.

**Table 8-2 – Partisol Service Record**

No.	Serial #	Model	Purchased	Location
1	210801007	2000FRM	2010	Sioux Falls
2	210811007	2000FRM	2010	Sioux Falls
3	210851007	2000FRM	2010	Sioux Falls (Spare parts)
4	90162	PQ200	2024	Sioux Falls
5	90166	PQ200	2024	Sioux Falls

#### 8.3.2 Speciation PM<sub>2.5</sub> Monitors

The department currently does speciation monitoring at its National Core site in Sioux Falls. In 2009, the Met One SASS monitor was moved from the Hilltop site to the NCore site. In September 2009, the Interagency Monitoring of Protected Visual Environments URG 3000N sampler was set up to do the carbon sampling. In November 2016, EPA Region 8 gave the department a Met One SuperSASS to replace the SASS. The SuperSASS allows four sample

cartridges to be loaded enabling the sampler to collect samples every 3<sup>rd</sup> day with physical loading only required every 6<sup>th</sup> day. The speciation monitors were moved to the new SF USD site in early 2021. The program doesn't anticipate needing to purchase a new PM2.5 speciation monitor in the near future.

#### 8.4 Continuous Particulate Matter Monitors

The department operates the Met One BAM 1020 continuous particulate monitor. The department has 17 in-field BAM continuous monitors operating at the monitoring sites (See Table 8-3). Advantages of running one monitoring method are data consistency across sites, decreased training time for operators, reduced inventory of spare parts, and higher quality assurance during operational checks.

The oldest monitors are over fifteen years old. The department has not experienced many problems with these monitors but expects to begin having more operational problems as the monitors age. Because this monitor type has been so reliable, the department has converted all continuous particulate monitoring to this method. The operational life expectancy of this continuous particulate matter (PM) monitor running 24 hours a day 365 days a year is about 15 years, mainly due to detector and hardware board failures. With some major replacement of monitor components, the operational age may be extended.

The department did not purchase any new Met One BAM 1020s in 2025 but will likely purchase new monitors over the next couple of years to replace the oldest models.

**Table 8-3 - BAM Service Record**

No.	Serial #	Purchased	Comments
1	H7236	2008	Pierre Lab
2	H2972	2008	Pierre Lab
3	K1801	2010	Sioux Falls (Spare)
4	M5333	2011	Watertown
5	M12165	2012	Rapid City (Spare)
6	T15079	2015	Watertown
7	T15065	2015	Pierre Lab
8	T19274	2015	Watertown
9	U15821	2017	Vermillion (Spare)
10	U15820	2017	Aberdeen
11	X12895	2018	Sioux Falls (Spare)
12	W25139	2018	Black Hawk
13	Y14735	2019	Sioux Falls (Spare)
14	Y21688	2019	Aberdeen
15	Y14733	2019	Credit Union
16	A14977	2020	Pierre - Airport
17	CN10310	2022	SF-USD
18	CN10311	2022	SF-USD
19	CN10731	2022	Badlands

20	CN15827	2022	Rapid City (Spare)
21	CN15828	2022	Pierre Lab
22	EN11232	2024	Credit Union
23	EN12472	2024	Brookings
24	EN12476	2024	Brookings
25	EN12471	2024	Wind Cave
26	EN12467	2024	Badlands

## 8.5 Continuous Gas Analyzers and Calibrators

The gaseous pollutant air monitoring network consists of continuous gas analyzers and calibrators. The department has purchased various pieces of equipment nearly every year over the past decade. The department typically purchases replacement equipment for instruments that are 7–10 years old, although some analyzers, such as ozone, can have a longer lifespan.

### 8.5.1 Ozone Analyzers

In 2025, the department operated ozone analyzers at seven sites throughout South Dakota. The ozone instruments have been some of the more reliable and durable instruments in the monitoring network. The program also has four spare ozone analyzers. One of the spares is considered a predominantly lab-residing ozone analyzer, used to conduct checks on ozone transfer standards, however it could be placed in the field in case of an emergency (see Table 8-4). The program will consider purchasing new ozone analyzers within the next year or two.

**Table 8-4 - Ozone Analyzers**

No.	Serial #	Purchased	Location
1	1313057856	2013	Pierre Lab
2	1427262856	2014	Brookings
3	1191893442	2019	Watertown
4	1191893443	2019	Sioux Falls (Spare)
5	5932	2020	Badlands
6	12035310150	2020	Pierre Lab
7	12035310149	2020	Black Hawk
8	5901	2020	Pierre Lab
9	6947	2022	Wind Cave
10	7308	2023	Vermillion
11	7555	2024	Sioux Falls
12	7556	2024	Sioux Falls (Spare)

### 8.5.2 Sulfur Dioxide Analyzers

The department operated Sulfur Dioxide analyzers at two sites in South Dakota in 2025. The department also had three Sulfur Dioxide backup analyzers for use when a major repair is needed.

The Sulfur Dioxide analyzers have been reliable and seldom need to be sent in for repair. Occasionally a lamp or detector needs to be replaced, which is something the department can do in-house. As with most continuous gas instruments, the department does replace the pumps and installs pump repair kits in-house. The oldest model is from 2008 (see Table 8-5). The program doesn't anticipate needing to purchase another new SO<sub>2</sub> analyzer in the near future.

**Table 8-5 - Sulfur Dioxide Analyzers**

No.	Serial #	Purchased	Location
1	0829531904	2008	Sioux Falls (Spare)
2	062127058	2012	Sioux Falls (Spare)
3	408	2020	Pierre Lab (Spare)
4	429	2021	Credit Union
5	430	2021	Sioux Falls

### 8.5.3 Nitrogen Dioxide Analyzers

The department operated Nitrogen Dioxide analyzers at two sites in South Dakota in 2025. The National Core site in Sioux Falls also includes a NO<sub>y</sub> analyzer in addition to the traditional NO<sub>x</sub> analyzer. The department has three backup NO<sub>2</sub> analyzers, which are all currently housed in our laboratory in Pierre.

Nitrogen Dioxide analyzers have been the most difficult to maintain and operate of the gaseous pollutant analyzers. Replacement parts can be very expensive and if the instrument needs to go back to the factory for repair, the cost can easily reach \$2,000 to \$3,000. The oldest Nitrogen Dioxide analyzer in our network was purchased in 2015 (see Table 8-6). The program doesn't anticipate needing to purchase another new NO<sub>2</sub> analyzer in the near future.

**Table 8-6 - Nitrogen Dioxide Analyzers**

No.	Serial #	Purchased	Location
1	2411	2015	Sioux Falls
2	469	2016	Sioux Falls (NO <sub>y</sub> )
3	3006	2016	Pierre Lab (Spare)
4	6557	2020	Pierre Lab (Spare)
5	6556	2020	Credit Union
6	6981	2021	Pierre Lab (Spare)

#### 8.5.4 Carbon Monoxide Analyzers

The department operates just one Carbon Monoxide analyzer at our National Core site in Sioux Falls. The department purchased a new Teledyne-API Carbon Monoxide analyzer in 2022 (see Table 8-7). The previous site analyzer is no longer operational, so the department currently does not have a backup analyzer at the National Core site and does not anticipate purchasing one since this is the only Carbon Monoxide site in the monitoring network.

**Table 8-7 - Carbon Monoxide Analyzers**

No.	Serial #	Purchased	Location
1	631	2022	Sioux Falls

#### 8.5.5 Multi-gas & Ozone Calibrators

The department operates either a multi-gas or ozone calibrator at each of the monitoring sites with gas analyzers (see Tables 8-8 and 8-9). The department primarily uses Environics 6103 and Teledyne T700U multi-gas calibrators for weekly checks and quarterly audits where SO<sub>2</sub> and NO<sub>X</sub> monitors are located. Thermo Fischer Ozone primary standards and Teledyne T703U Ozone Calibrators are used at sites with just ozone. Both types of calibrators have been very reliable and inexpensive to operate. The annual calibration of the flow controllers in the 6103 instruments is conducted in-house. However, the department has been sending 6103's to Environics on a rotating basis for factory repairs and calibrations. The department operates some calibrators that are over 15 years old and will look to purchase additional calibrators in the near future.

**Table 8-8 - Multi-gas Calibrators**

No.	Serial #	Purchased	Location
1	4299	2008	Sioux Falls
2	4290	2008	Pierre Airport
3	4562	2009	Sioux Falls Lab
4	4561	2009	Vermillion
5	5047	2011	Credit Union
6	6588	2015	Rapid City Regional Office
7	9089	2021	Pierre Lab
8	9088	2021	Pierre Lab
9	10581	2023	Pierre Lab
10	10582	2023	Brookings
11	839	2023	Sioux Falls

12	10964	2024	Rapid City Regional Office
13	10965	2024	Vermillion
14	10966	2024	Sioux Falls

**Table 8-9 - Ozone Calibrators**

No.	Serial #	Purchased	Location
1	0807328333	2008	Wind Cave
2	0824131746	2008	Black Hawk
3	1191893440	2019	Lab (EPA Standard)
4	1191893441	2019	Brookings
5	12035310151	2020	Watertown
6	12222819602	2022	Badlands
7	430	2023	Vermillion
8	449	2024	Wind Cave
9	450	2024	Sioux Falls (EPA Standard)

## 8.6 Zero Air Generators

The department operates a zero-air generator at each of the monitoring sites that have gas analyzers (see Table 8-10). The zero air generators have been historically inexpensive to operate, with very little operational issues occurring, making them one of the most reliable pieces of equipment we operate. The program may need to replace a couple of the oldest zero air generators within the next few years.

The program also owns two portable zero air generators in an effort to reduce the amount of effort required to carry large and heavy zero air generators around during audits. However, these zero air generators have not been reliable, especially during NOx audits. We will continue working on solving this issue.

**Table 8-10 – Zero Air Generators**

No.	Serial #	Purchased	Location
1	3290	2010	Sioux Falls
2	4014	2011	Credit Union
3	4013	2011	Pierre Lab (spare)
4	4012	2011	Badlands

5	4619	2013	Vermillion
6	4618	2013	Sioux Falls (Spare)
7	1305	2018	Brookings
8	1306	2018	Black Hawk
9	1304	2018	Wind Cave
10	172 (portable)	2019	Pierre Lab
11	173 (portable)	2019	Pierre Lab
12	1920	2020	Rapid City (Audits)
13	1944	2020	Watertown
14	2402	2023	Pierre Lab
15	2403	2023	Brookings

## 8.7 Meteorological Stations

The department currently has two meteorological (met) stations at the Black Hawk and Sioux Falls locations. Each meteorological station consists of a temperature sensor, wind direction vane, and anemometer, mounted on a 10-meter tower. The National Core Site also has a relative humidity sensor. The operation of each instrument on the tower is checked every month. The Sioux Falls meteorological station is audited once per quarter even though the audit requirements for a National Core Site are biannually. The Black Hawk met station is audited biannually even though it is only required annually. The program doesn't foresee the need to purchase any completely new meteorology stations indefinitely, though individual components such as anemometers may need to be periodically replaced as needed.

The department's data needs at the other monitoring sites are being met by reliable and available data from the National Weather Service collected from nearby airports.

## 9.0 COMPLIANCE WITH NATIONAL AMBIENT AIR QUALITY STANDARDS

This section provides a comparison of the data collected to the National Ambient Air Quality Standards. The comparison will determine if an area is attaining the standard. In addition, the comparison will assist in determining if more monitoring stations for certain parameters are needed in an area or an area no longer needs to monitor for a certain parameter or parameters.

### 9.1 Particulate Matter (PM10)

The PM<sub>10</sub> National Ambient Air Quality Standard is based on a 24-hour average concentration. The maximum 24-hour average concentration allowed is 150 micrograms per cubic meter.

Attainment with the 24-hour standard is demonstrated when there is less than or equal to one expected exceedance per year averaged over three years. A 24-hour average concentration of 154.4 micrograms per cubic meter is the highest level that still attains the 24-hour standard for PM<sub>10</sub> based on EPA rounding to the nearest 10 micrograms per cubic meter.

In 2025, the statewide PM<sub>10</sub> monitoring network included eight monitoring locations. All of the sites used continuous samplers providing 1-hour concentrations at the Rapid City Credit Union, SF USD (Sioux Falls), Watertown, Black Hawk Elementary, Brookings Research Farm, Aberdeen, Badlands, and Wind Cave sites. Badlands and Wind Cave sites are rural sites.

Table 9-1 contains a list of the expected exceedance and attainment status for the PM<sub>10</sub> ambient air monitors throughout the state for calendar years 2023 to 2025.

**Table 9-1 – Statewide PM<sub>10</sub> 24-Hour Concentrations**

Site	Expected Exceedance	Attainment Status
Aberdeen Bus Stop	1.0	Yes
Rapid City Credit Union	2.7	No*
Black Hawk Elementary	0.0	Yes
SF USD	0.4	Yes**
Badlands	0.3	Yes
Brookings Research Farm	0.7	Yes
Watertown	0.4	Yes
Wind Cave	0.0	Yes

\*Thought to be due to exceptional events of high winds and fires. See more information below.

\*\*Completeness criteria was not met for 2023 at the SF USD site.

During 2025, there was one PM<sub>10</sub> concentration that exceeded the 24-hour standard at the Credit Union site and that was attributed to high winds. During 2024, there were four PM<sub>10</sub> concentrations that exceeded the 24-hour standard at the Credit Union site. One was attributed to high winds, and one was attributed to Canadian fires. During 2023, there were three PM<sub>10</sub> concentration that exceeded the 24-hour standard at the Credit Union site and two of those were attributed to Canadian fires. These resulted in an expected exceedance level of 2.7. These events have been flagged in AQS and the department believes they fit under the definition of exceptional events. If needed, the department will develop an exceptional events package for these events and submit it to EPA for concurrence.

Title 40 of the Code of Federal Regulations Part 50.14 allows a State to exclude data showing exceedances or violations of any NAAQS that are directly due to an exceptional event from use in determinations. DANR has flagged the violation days in AQS and if needed will develop exceptional events packages for these events and submit them to EPA for concurrence. Therefore, the department considers all eight sites in South Dakota to be demonstrating attainment of the PM<sub>10</sub> standard.

## 9.2 Particulate Matter (PM<sub>2.5</sub>)

The PM<sub>2.5</sub> National Ambient Air Quality Standards consist of a 24-hour and an annual standard. The 24-hour standard is 35 micrograms per cubic meter. Attainment of the 24-hour standard is achieved when the maximum 24-hour average concentration, based on the annual 98<sup>th</sup> percentile averaged over three years (24-hour average design value), is less than or equal to 35 micrograms per cubic meter.

In 2024, the PM<sub>2.5</sub> annual standard was lowered from 12 to 9 micrograms per cubic meter. Attainment is demonstrated when the maximum annual arithmetic mean averaged over three consecutive years (annual design value) is equal to or less than 9 micrograms per cubic meter.

### 9.2.1 PM<sub>2.5</sub> 24-Hour Standard

Table 9-2 shows the yearly 98<sup>th</sup> percentile for calendar years 2023 to 2025 used in the calculation of the 24-hour design value for PM<sub>2.5</sub>, the 2025 24-hour design value, attainment status of each site, and the percent of the standard. The percent of the standard in this case and for the rest of the pollutants is the design value divided by the standard times 100.

In 2025, the highest 24-hour 98<sup>th</sup> percentile concentration was 32.2 micrograms per cubic meter and was recorded at Watertown. The site with the second highest 24-hour 98<sup>th</sup> percentile concentration in 2025 was at the Brookings Site with 30.9 micrograms per cubic meter. 2023 had many high days due to Canada fires. The eastern side of the state in 2025 was also affected by Canada fires.

**Table 9-2 – Statewide PM<sub>2.5</sub> 24-Hour Concentrations**


Site	Yearly 98th Percentile	2025 24-hour Design Value	Attainment Status	Percent of the Standard
Aberdeen Bus Stop	2023 – 35.7 ug/m <sup>3</sup> 2024 – 16.9 ug/m <sup>3</sup> 2025 – 25.0 ug/m <sup>3</sup>	26 ug/m <sup>3</sup>	Yes	74%
Rapid City Credit Union	2023 – 31.3 ug/m <sup>3</sup> 2024 – 23.5 ug/m <sup>3</sup> 2025 – 14.9 ug/m <sup>3</sup>	23 ug/m <sup>3</sup>	Yes	66%
Badlands	2023 – 31.6 ug/m <sup>3</sup> 2024 – 24.0 ug/m <sup>3</sup> 2025 – 21.4 ug/m <sup>3</sup>	26 ug/m <sup>3</sup>	Yes	74%
Pierre Airport	2023 – 31.7 ug/m <sup>3</sup> 2024 – 13.5 ug/m <sup>3</sup> 2025 – 19.9 ug/m <sup>3</sup>	22 ug/m <sup>3</sup>	Yes	63%
SF USD	2023 – 29.3 ug/m <sup>3</sup> 2024 – 17.9 ug/m <sup>3</sup> 2025 – 21.7 ug/m <sup>3</sup>	23 ug/m <sup>3</sup>	Yes*	66%

Site	Yearly 98th Percentile	2025 24-hour Design Value	Attainment Status	Percent of the Standard
Brookings Research Farm	2023 – 27.2 ug/m <sup>3</sup> 2024 – 16.4 ug/m <sup>3</sup> 2025 – 30.9ug/m <sup>3</sup>	25 ug/m <sup>3</sup>	Yes	71%
Watertown	2023 – 29.4 ug/m <sup>3</sup> 2024 – 19.9 ug/m <sup>3</sup> 2025 – 32.2 ug/m <sup>3</sup>	27 ug/m <sup>3</sup>	Yes	77%
Wind Cave	2023 – 15.8 ug/m <sup>3</sup> 2024 – 22.4 ug/m <sup>3</sup> 2025 – 16.1 ug/m <sup>3</sup>	18 ug/m <sup>3</sup>	Yes	51%
Vermillion	2023 – 41.3 ug/m <sup>3</sup> 2024 – 15.9 ug/m <sup>3</sup> 2025 – 18.8 ug/m <sup>3</sup>	25 ug/m <sup>3</sup>	Yes	71%

\* Did not meet completeness criteria for 2023 at the SF USD site.

Figure 9-1 contains a graph of the 24-hour design values for each site. The highest design value for the 24-hour PM<sub>2.5</sub> standard from 2023 to 2025 was recorded at the Watertown site with a concentration of 27 micrograms per cubic meter. This represents 77% of the standard. The Wind Cave site had the lowest 24-hour design values for PM<sub>2.5</sub> at 18 micrograms per cubic meter or 51% of the standard. 2023 had many high days due to fires in Canada. The eastern side of the state in 2025 was also affected by Canada fires. All sites are attaining the 24-hour PM<sub>2.5</sub> standard.

**Figure 9-1 – 2025 PM<sub>2.5</sub> Statewide 24-Hour Design Values**

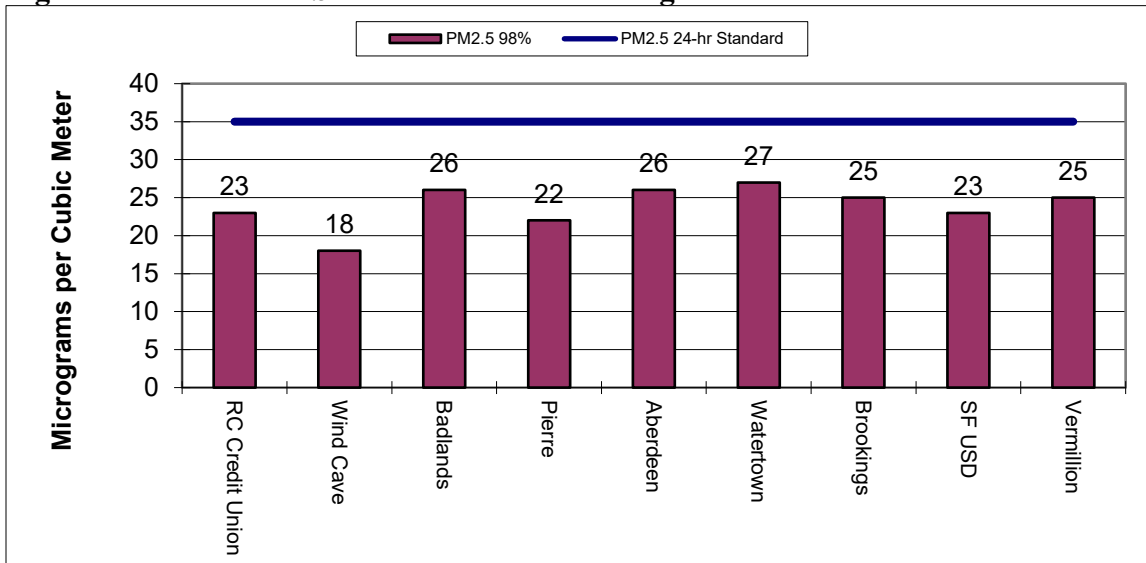

\* Completeness criteria were not met at SF USD in 2023.

### 9.2.2 PM<sub>2.5</sub> Annual Standard

Table 9-3 contains a list of the annual averages, 2025 annual design values, attainment status, and percent of the standard for each of the PM<sub>2.5</sub> sites using the data from 2023 to 2025 in the state. The highest annual average concentration in 2025 was recorded at the Brookings Site at 9.6 micrograms per cubic meter. The Pierre Airport Site had the lowest annual average at 4.2 micrograms per cubic meter in 2025. 2023 had many high days due to fires in Canada. The eastern side of the state in 2025 was also affected by Canada fires.

**Table 9-3 – Statewide PM<sub>2.5</sub> Annual Concentrations**

Site	Annual Averages	2025 Annual Design Values	Attainment Status	Percent of the Standard
Watertown	2023 – 9.5 ug/m <sup>3</sup> 2024 – 7.6 ug/m <sup>3</sup> 2025 – 7.4 ug/m <sup>3</sup>	8.2 ug/m <sup>3</sup>	Yes	91%
Brookings Research Farm	2023 – 6.4 ug/m <sup>3</sup> 2024 – 5.7 ug/m <sup>3</sup> 2025 – 9.6 ug/m <sup>3</sup>	7.2 ug/m <sup>3</sup>	Yes	80%
SF USD	2023 – 6.9 ug/m <sup>3</sup> 2024 – 4.5 ug/m <sup>3</sup> 2025 – 5.8 ug/m <sup>3</sup>	5.7 ug/m <sup>3</sup>	Yes*	63%
Vermillion	2023 – 8.7ug/m <sup>3</sup> 2024 – 6.5 ug/m <sup>3</sup> 2025 – 4.8ug/m <sup>3</sup>	6.7 ug/m <sup>3</sup>	Yes	74%
Aberdeen Bus Stop	2023 – 7.0 ug/m <sup>3</sup> 2024 – 5.2 ug/m <sup>3</sup> 2025 – 6.0 ug/m <sup>3</sup>	6.1 ug/m <sup>3</sup>	Yes	67%
Pierre Airport	2023 – 5.1 ug/m <sup>3</sup> 2024 – 2.2 ug/m <sup>3</sup> 2025 – 4.2 ug/m <sup>3</sup>	3.8 ug/m <sup>3</sup>	Yes	42%
Badlands	2023 – 7.5 ug/m <sup>3</sup> 2024 – 7.3 ug/m <sup>3</sup> 2025 – 7.6 ug/m <sup>3</sup>	7.5 ug/m <sup>3</sup>	Yes	83%
Wind Cave	2023 – 4.8 ug/m <sup>3</sup> 2024 – 6.6 ug/m <sup>3</sup> 2025 – 7.4 ug/m <sup>3</sup>	6.3 ug/m <sup>3</sup>	Yes**	70%
Rapid City Credit Union	2023 – 8.4 ug/m <sup>3</sup> 2024 – 6.9 ug/m <sup>3</sup> 2025 – 5.9 ug/m <sup>3</sup>	7.1 ug/m <sup>3</sup>	Yes	79%


\*Completeness criteria not met at SF USD in 2023.

\*\*Completeness criteria not met at Wind Cave in 2023.

Figure 9-2 contains a graph of the PM<sub>2.5</sub> annual average design value for each site. None of sites in the network had a 2025 design value that exceeded the annual PM<sub>2.5</sub> standard. The highest annual design value occurred at the Watertown site with a level of 8.2 micrograms per cubic meter which is 91% of the annual standard. The lowest PM<sub>2.5</sub> annual design value occurred at the

Pierre Airport Site with a concentration of 3.8 micrograms per cubic meter which is 42% of the annual standard. 2023 had many high days due to fires in Canada. The eastern side of the state in 2025 was also affected by Canada fires.

**Figure 9-2 – 2025 PM<sub>2.5</sub> Statewide Annual Design Values**

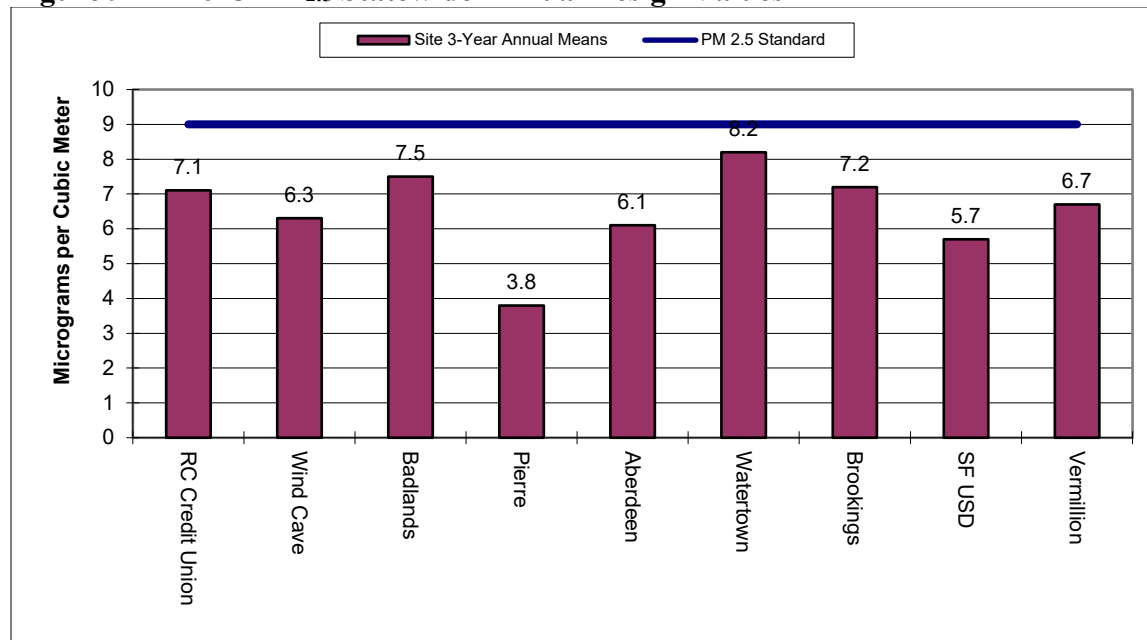

\*Completeness criteria were not met at SF USD and Wind Cave in 2023.

### 9.3 Lead

During the early 1980's, the department conducted lead sampling. The levels detected were well below the National Ambient Air Quality Standards at that time. After passage of the 1990 Clean Air Act Amendments, there were concerns with the way EPA had instructed states in determining if those areas were in attainment of the lead standard. For this reason, a monitoring site was established in April 1992, at the Jaehn's Site in Rapid City to determine compliance with the standard. This site was downwind of GCC Dacotah, which is a cement plant that burns coal and has the potential to emit lead. The results of the analyzed data from the second quarter of 1992 through the first quarter of 1994 showed lead levels well below the National Ambient Air Quality Standards. Due to the low concentrations of lead in Rapid City, the sampling site was terminated at the end of the first quarter in 1994.

EPA changed the lead National Ambient Air Quality Standards on October 15, 2008. The change significantly lowered the lead standard from 1.5 micrograms per cubic meter to 0.15 micrograms per cubic meter based on the annual maximum three-month rolling average. Attainment of the lead National Ambient Air Quality Standards is achieved if the annual maximum three-month rolling average, averaged over a three-year period, is less than or equal to 0.15 micrograms per cubic meter.

The lead sampling in the past and current emissions levels indicates that South Dakota is attaining the new lead standard.

## 9.4 Ozone

Seven ozone ambient air monitoring sites were operated in 2025. The analyzers were located at SF USD, Vermillion, Brookings Research Farm, Watertown, Badlands, Black Hawk, and Wind Cave sites. The National Ambient Air Quality Standard for ozone consists of a daily 8-hour average of 0.070 parts per million. The 8-hour standard is met when the 3-year average of the annual fourth-highest daily maximum 8-hour average ozone concentration is less than or equal to 0.070 parts per million.

The 4<sup>th</sup> highest concentration for each year, 2025 8-hour design value in parts per million, attainment status, and percent of the standard for each of the sites can be seen in Table 9-4 and the 2025 design value is summarized in Figure 9-3. From 2023 to 2025, the SF USD site had the highest 3-year average ozone concentrations in the state at 0.069 parts per million, which is 99% of the ozone standard. The Watertown site is reporting the lowest ozone design value with 0.058 parts per million or 83% of the standard.

During 2023, there were several fires in Canada which seemed to have increased the concentrations at several of the sites. During 2024, the western sites were also influenced by Canadian fires. During 2025, the eastern sites were also influenced by Canadian fires.


The data collected in the past three years demonstrates that South Dakota is attaining the national ozone standard, but two sites are at 99% of the design value and five of the sites were above 90% of the ozone design value.

**Table 9-4 – Statewide Ozone 4<sup>th</sup> highest Concentrations**

Site	4 <sup>th</sup> Highest Concentration	2025 8-Hour Design Values	Attainment Status	Percent of the Standard
SF USD	2023 – 0.082 ppm 2024 – 0.062 ppm 2025 – 0.063 ppm	0.069 ppm	Yes	99%
Brookings Research Farm	2023 – 0.070 ppm 2024 – 0.050 ppm 2025 – 0.067 ppm	0.062 ppm	Yes	89%
Black Hawk	2023 – 0.068 ppm 2024 – 0.078 ppm 2025 – 0.059 ppm	0.068 ppm	Yes	97%
Badlands	2023 – 0.068 ppm 2024 – 0.075 ppm 2025 – 0.058 ppm	0.067 ppm	Yes	96%
Wind Cave	2023 – 0.065 ppm 2024 – 0.073 ppm 2025 – 0.063 ppm	0.067 ppm	Yes	96%
Watertown	2023 – 0.072 ppm 2024 – 0.049 ppm 2025 – 0.055 ppm	0.058 ppm	Yes	83%

Site	4 <sup>th</sup> Highest Concentration	2025 8-Hour Design Values	Attainment Status	Percent of the Standard
Vermillion	2023 – 0.074 ppm 2024 – 0.059 ppm 2025 – 0.057 ppm	0.063 ppm	Yes	90%

**Figure 9-3– 2025 Ozone Design Values Statewide**

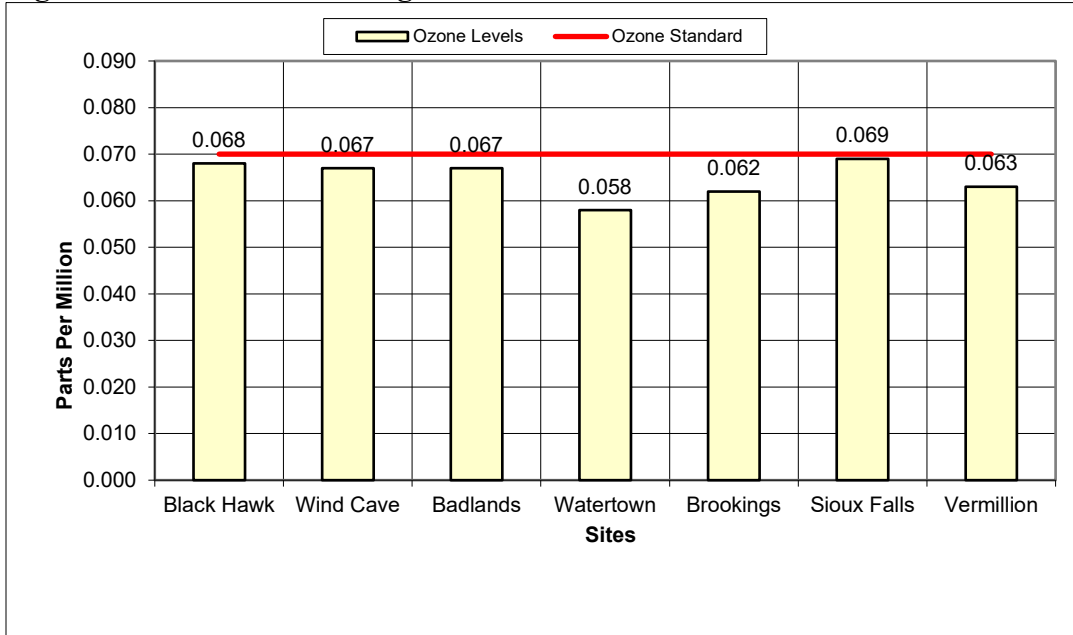

## 9.5 Sulfur Dioxide

Two Sulfur Dioxide ambient air monitoring sites were operated in 2025. The analyzers were located at the SF USD and Rapid City Credit Union sites. The 1-hour Sulfur Dioxide standard concentration is 75 parts per billion. The area is attaining the standard when the three-year average of the yearly (99<sup>th</sup> percentile) of the daily maximum 1-hour average concentrations is less than or equal to 75 parts per billion (1-hour design value). The secondary Sulfur Dioxide standard was revised December 11, 2024, from a 3-hour average concentration of 0.5 parts per million, not to be exceeded more than once per year to an annual standard of 10 parts per billion averaged over three years.

### 9.5.1 Sulfur Dioxide 1-Hour Standard


Table 9-5 contains the yearly 99<sup>th</sup> percentile concentration, 1-hour design value, attainment status, and percent of the standard for each site. The Sulfur Dioxide 1-hour design values are based on Sulfur Dioxide data collected in 2023 to 2025. The highest 99<sup>th</sup> percentile 1-hour level in 2025 was recorded at the RC Credit Union Site with 2 parts per billion.

**Table 9-5 – 2025 Statewide Sulfur Dioxide 1-hour Design Values**

Site	99 <sup>th</sup> Percentile Concentration	1-Hour Design Values	Attainment Status	Percent of the Standard
SF USD	2023 – 1 ppb 2024 – 1 ppb 2025 – 1 ppb	1 ppb	Yes	1%
Rapid City Credit Union	2023 – 2 ppb 2024 – 8 ppb 2025 – 2 ppb	4 ppb	Yes	5%

Figure 9-4 shows the three-year average of the yearly 99<sup>th</sup> percentile or design value for the 1-hour concentration for each of the sites in the network for 2025. Both of the sites recorded concentrations well under the 1-hour standard. The data collected in the past three years demonstrates that South Dakota is attaining the 1-hour Sulfur Dioxide standard.

**Figure 9-4– 2025 Sulfur Dioxide 1-Hour Concentrations**

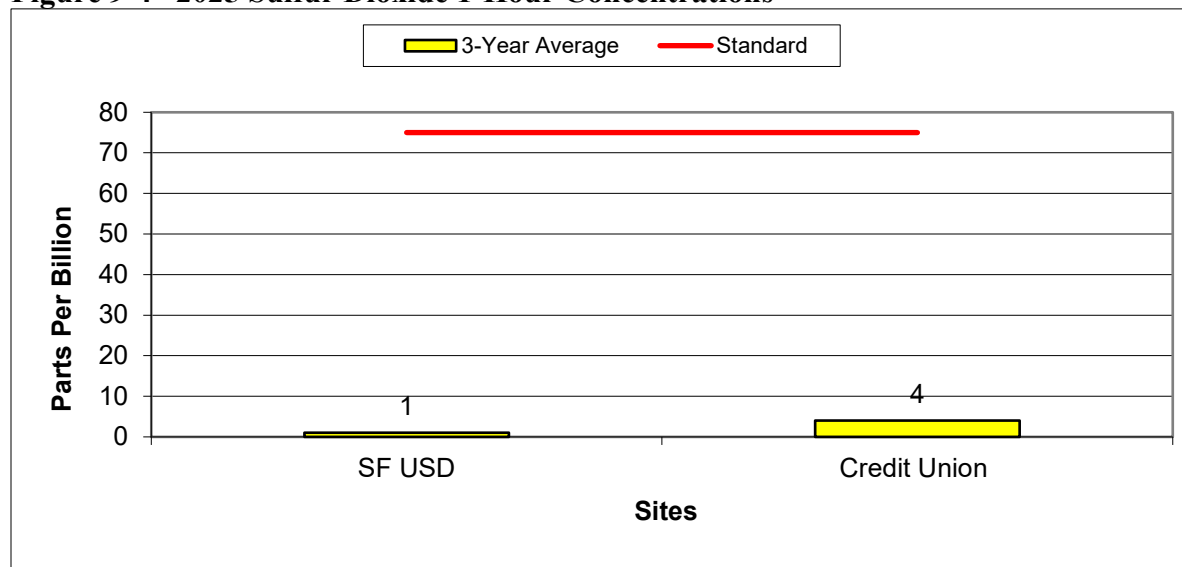

### **9.5.2 Sulfur Dioxide Annual Secondary Standard**

The EPA Air Quality Systems does not calculate the design value or annual averages needed to calculate the new annual secondary Sulfur Dioxide standard, so a comparison could not be made. South Dakota has very low levels of Sulfur Dioxide at the two monitoring sites. Therefore, the department opted to use the maximum 1-hour concentrations as a comparison for the annual standard for Sulfur Dioxide.

The highest 1-hour average concentrations recorded at the RC Credit Union site and the Sioux Fall USD site in the past three years were used. Since the 3-year average of the maximum 1-hour average concentrations do not exceed the secondary standard, both sites are attaining the secondary standard for Sulfur Dioxide.

## 9.6 Nitrogen Dioxide

Beginning in 2010, the standard for Nitrogen Dioxide was revised by adding a 1-hour standard of 100 parts per billion and keeping the annual arithmetic mean standard of 53 parts per billion. Attainment is demonstrated when the 3-year average of 98<sup>th</sup> percentile daily maximum 1-hour concentration is less than or equal to 100 parts per billion (1-hour design value) and the annual arithmetic mean is less than or equal to 53 parts per billion (annual design value).

There were two Nitrogen Dioxide ambient air monitoring sites operated in 2025. The sampling locations were at the SF USD and Rapid City Credit Union sites.

### 9.6.1 Nitrogen Dioxide 1-Hour Standard


Table 9-6 contains the 1-hour 98<sup>th</sup> percentile concentration for each of the last three years, 1-hour design values, attainment status, and percent of the standard for each site. The SF USD site had the highest 2025 98<sup>th</sup> percentile 1-hour concentration at 26.4 parts per billion. The highest 98<sup>th</sup> 1-hour concentration for 2025 at the RC Credit Union site was 23.1 parts per billion.

**Table 9-6 – Nitrogen Dioxide 1-Hour 98<sup>th</sup> Percentile Concentrations**

Site	98 <sup>th</sup> Percentile Concentration	1-Hour Design Values	Attainment Status	Percent of the Standard
SF USD	2023 – 40.0 ppb 2024 – 27.2 ppb 2025 – 26.4 ppb	31 ppb	Yes	31%
RC Credit Union	2023 – 30.6 ppb 2024 – 26.9 ppb 2025 – 23.1 ppb	27 ppb	Yes	27%

Figure 9-5 shows the Nitrogen Dioxide 1-hour design values for each of the sites. The Sioux Falls USD Site had the highest concentration at 31 parts per billion or 31% of the standard. The Rapid City Credit Union Site recorded 27 parts per billion or 27% of the standard. Both of these sites had concentrations under the 1-hour Nitrogen Dioxide standard and are attaining the standard using data from 2023 to 2025.


**Figure 9-5 – Nitrogen Dioxide 1-hour Design Values 2025**

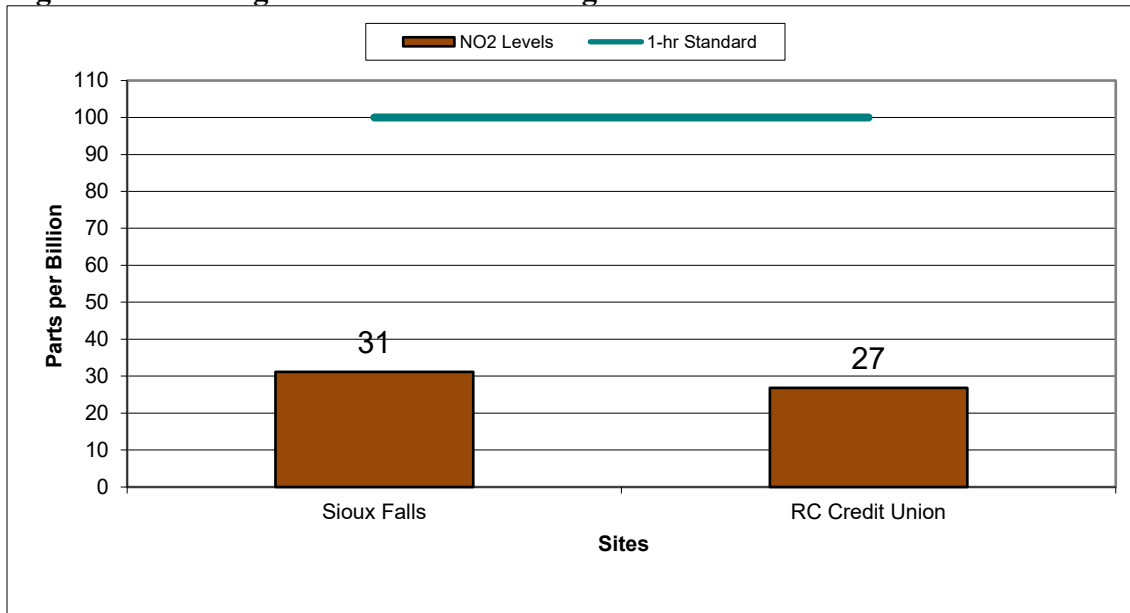

**9.6.2 Nitrogen Dioxide Annual Standard**

Figure 9-6 shows the annual average for the two sites operated in 2025. The highest Nitrogen Dioxide annual average was recorded at the SF USD Site at 6.01 parts per billion. In 2025, both sites attained the annual standard for Nitrogen Dioxide.

**Figure 9-6 – Nitrogen Dioxide Annual Concentration 2025**

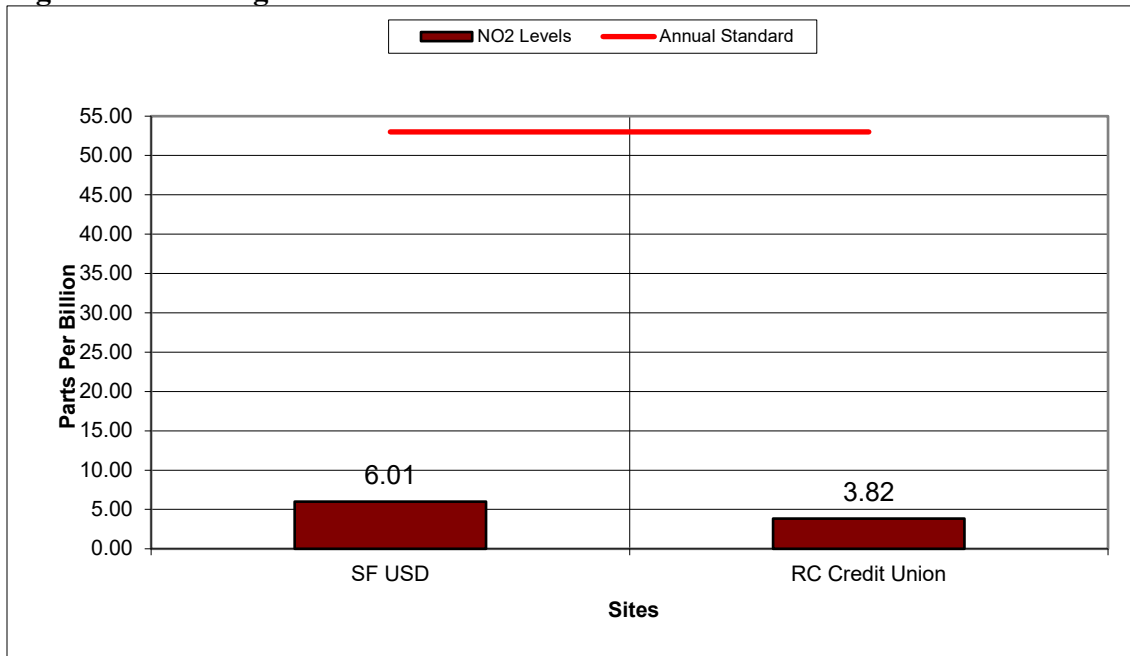

## 9.7 Carbon Monoxide

The Carbon Monoxide standard is based on two primary standards in the form of a one-hour and an 8-hour average concentration. The one-hour standard is 35.0 parts per million and is not to be exceeded more than once per year. The highest 1-hour concentration of Carbon Monoxide recorded in 2025 at the SF USD Site was 0.9 parts per million. The Carbon Monoxide concentrations are very low. The Carbon Monoxide data shows the area is attaining the 1-hour National Ambient Air Quality Standard.

The other standard is an 8-hour average concentration of 9.0 parts per million, not to be exceeded more than once per year. The highest 8-hour average recorded in 2025 at the SF U SD School Site was 0.5 parts per million. The Carbon Monoxide concentrations are very low, and the area is attaining the 8-hour average National Ambient Air Quality Standard.

## 9.8 2025 High Concentrations Summary

Evaluating high concentration days is important because they affect the design values and need to be considered when evaluating the data results for each year. A conceptual theory on what caused the high concentrations can be formed and further developed in future years. In some cases, if local sources are causing the problem, early actions can be taken to reduce concentration levels and further protect public health from high levels. As EPA revises the national standards lower, information on the cause of the high concentration day needs to be collected soon after the event instead of three years after a standard revision. In some cases, the information may show long range transport or an exceptional event.

The department defined high concentration days as days where the concentration was 90% of or greater than the applicable standard. The evaluation of high concentration days for each parameter is as follows:

1. Ozone  $\geq$  0.063 parts per million, 8-hour average;
2. PM<sub>2.5</sub>  $\geq$  32 micrograms per cubic meter, 24-hour average;
3. PM<sub>2.5</sub>  $\geq$  8.1 ug/ m<sup>3</sup>, annual average;
4. PM<sub>10</sub>  $\geq$  135 ug/ m<sup>3</sup>, 24-hour average;
5. Nitrogen Dioxide  $\geq$  90.0 parts per billion, 1-hour maximum;
6. Sulfur Dioxide  $\geq$  67.5 parts per billion, 1-hour maximum;
7. Carbon Monoxide  $\geq$  8.1 parts per million, 8-hour average; and
8. Carbon Monoxide  $\geq$  31.5 parts per million 1-hour maximum.

None of the recorded samples at any of the locations throughout the state for Sulfur Dioxide, Nitrogen Dioxide, and Carbon Monoxide (1-hour or 8-hour) had levels that exceeded the high concentration day criteria listed above for these pollutants.

### 9.8.1 PM<sub>2.5</sub> High Concentration Days

In 2025, the Watertown site had an annual PM<sub>2.5</sub> design value of 8.2 micrograms per cubic meter annual standard. All nine sites are demonstrating attainment of the annual PM<sub>2.5</sub> standard.

In 2025, there were 30 high concentration readings that were spread over 10 days for the 24-hour PM<sub>2.5</sub> standard throughout South Dakota. All the exceedances of the standard were believed to be fire influenced. The high 24-hour PM<sub>2.5</sub> readings are shown in Table 9-7. The AirNow Air Quality Index (AQI) and AirNow Tech maps for the day are displayed in Appendix A. The AirNow Air Quality Index maps show the monitoring sites with high concentration days were at Moderate to Unhealthy for Sensitive Groups levels. The AirNow Tech maps show the wind barbs (direction and wind speed), fire locations, and the greyish areas represent smoke plumes. The department considers all nine sites in South Dakota to be demonstrating attainment of the PM<sub>2.5</sub> 24-hour standard.

**Table 9-7 – 2025 High 24-Hour PM<sub>2.5</sub> Readings**

No.	Date	Site	Concentration (ug/m3) *
1	05/31/2025	Brookings	41.7
	05/31/2025	Watertown	<b>50.9</b>
2	06/01/2025	Sioux Falls	41.0
	06/01/2025	Brookings	<b>59.1</b>
	06/01/2025	Watertown	<b>59.4</b>
3	06/12/2025	Brookings	<b>36.6</b>
4	07/12/2025	Watertown	32.2
	07/12/2025	Brookings	34.1
5	07/30/2025	Watertown	33.0
	07/30/2025	Aberdeen	<b>40.9</b>
6	07/31/2025	Watertown	<b>38.2</b>
	07/31/2025	Vermillion	<b>39.7</b>
	07/31/2025	Aberdeen	<b>39.9</b>
	07/31/2025	Sioux Falls	<b>39.9</b>
	07/31/2025	Pierre	<b>40.0</b>
7	07/31/2025	Brookings	<b>40.5</b>
	08/01/2025	Pierre	<b>35.1</b>
	08/01/2025	Aberdeen	<b>41.1</b>
	08/01/2025	Vermillion	<b>41.9</b>
	08/01/2025	Sioux Falls	<b>45.1</b>
8	08/01/2025	Watertown	<b>45.5</b>
	08/01/2025	Brookings	<b>46.0</b>
	08/02/2025	Watertown	32.7
	08/02/2025	Brookings	33.5
	08/02/2025	Pierre	34.0
9	08/02/2025	Aberdeen	<b>35.8</b>
	08/10/2025	Aberdeen	<b>36.0</b>
	08/11/2025	Sioux Falls	33.5
10	08/11/2025	Vermillion	34.9
	08/11/2025	Aberdeen	<b>36.7</b>

\*Bolded concentrations that are shaded represent PM<sub>2.5</sub> concentrations that exceeded the 24-hour standard.

### 9.8.2 PM<sub>10</sub> High Concentration Days

During 2025, there were two high concentration days for PM<sub>10</sub> in South Dakota. The high concentration days are shown in Table 9-8. The AirNow Air Quality Index (AQI) and AirNow Tech map are displayed in Appendix B.

The exceedance day was believed to be caused by high winds. The department considers all eight sites in South Dakota to be demonstrating attainment of the PM<sub>10</sub> 24-hour standard.

**Table 9-8 - 2025 High 24-Hour PM<sub>10</sub> Readings**

No.	Date	Site	Concentration (ug/m3) *
1	01/17/2025	Rapid City	<b>168</b>
2	01/18/2025	Rapid City	144

\*Bolded concentrations that are shaded represent PM<sub>10</sub> concentrations that exceeded the 24-hour standard.

### 9.8.3 Ozone High Concentration Days

During 2025, there were 21 high concentration readings that were spread over 14 days for the 8-hour average high concentration days for ozone. The exceedance day was believed to be influenced by fires. See table 9-9 for the high readings.

**Table 9-9 - 2025 High 8-Hour Average Ozone Readings**

No.	Date	Site	Concentration (ppm) *
1	05/06/2025	Brookings	0.064
2	05/10/2025	Wind Cave	0.066
3	05/11/2025	Wind Cave	0.063
	05/11/2025	Sioux Falls	0.064
	05/11/2025	Brookings	0.066
4	05/12/2025	Sioux Falls	0.064
	05/12/2025	Wind Cave	0.064
	05/12/2025	Brookings	0.068
5	05/13/2025	Sioux Falls	0.063
	05/13/2025	Brookings	0.067
6	05/31/2025	Brookings	0.068
7	06/01/2025	Watertown	0.063
	06/01/2025	Sioux Falls	0.066
	06/01/2025	Brookings	<b>0.075</b>
8	06/02/2025	Brookings	0.063
9	06/11/2025	Badlands	0.063
10	06/18/2025	Brookings	0.063
11	06/19/2025	Brookings	0.064
12	06/20/2025	Brookings	0.066

13	06/21/2025	Brookings	0.065
14	09/25/2025	Wind Cave	0.063

\* Bolded concentrations that are shaded represent ozone concentrations that exceeded the 8-hour average ozone standard.

The AirNow Air Quality Index (AQI) and AirNow Tech maps for each day are displayed in Appendix C.

## 10.0 AIR MONITORING SITE TRENDS

This section will evaluate each air monitoring site in the network, determine if the site should be continued, and examine trends for each pollutant. Through this evaluation a determination is made if site goals are being met and if each testing parameter is needed at the site. This section also has site specific information tables including Air Quality System ID #, location, operation, data use, sampling schedule, monitoring objectives, spatial scale, and sampling and analytical methods required as part of the annual plan requirements in Title 40 of the Code of Federal Regulations Part 58.

### 10.1 Credit Union Site

The Rapid City area had one monitoring site collecting data in 2025. The high concentration site for PM<sub>10</sub> was located at the Rapid City Credit Union Site and a continuous PM<sub>10</sub> monitor was used to determine compliance with the National Ambient Air Quality Standards. In addition, Sulfur Dioxide, Nitrogen Dioxide, and PM<sub>2.5</sub> analyzers were operated to determine current concentration levels.

In cooperation with Rapid City, Pennington County, and local industry, the department is implementing a Natural Events Action Plan for the Rapid City area. Part of this plan is to alert the public of the potential of high dust levels caused by high winds and to advise the public of precautions to take during the high wind events. Under this plan high wind dust alerts are called by the National Weather Service when the following forecast conditions occur:

1. Hourly wind speeds exceed 20 miles per hour;
2. Peak wind gusts are greater than 40 miles per hour; and
3. Five consecutive days of 0.02 inches or less of precipitation each day excluding dry snow.

During 2025, 9 high wind dust alert days were called for the Rapid City area. The alert day on 1/17/2025 exceeded the PM<sub>10</sub> 24-hour standard. The Natural Events Action Plan for the Rapid City area is working to maintain PM<sub>10</sub> concentrations below the National Ambient Air Quality Standards during the high wind events on most days but still concentrations can exceed the standard.

An attainment designation was requested for PM<sub>10</sub> and was approved by EPA for the Rapid City area in 2006. An attainment designation for the 24-hour PM<sub>2.5</sub> standard was requested for the Rapid City area in 2008 and for the annual PM<sub>2.5</sub> standard in 2014 and again for the new the

annual PM<sub>2.5</sub> standard in 2024. EPA designated Pennington and Meade Counties as attainment/unclassifiable for 24-hour standard in 2010 and the annual standard in 2015. The designation for the new annual PM<sub>2.5</sub> standard has not been finalized yet.

The Rapid City Credit Union Site is located on a lot next to Fire Station #3 building. The Rapid City Credit Union Site replaced the Fire Station #3 Site in October 2003 and is the high PM<sub>10</sub> concentration location for Rapid City. The Rapid City Credit Union Site is located just south of the quarry area and is centrally located in relation to the quarry facilities. Figure 10-1 contains a picture of the monitoring site looking in a northwest direction towards the quarry area. The goals of this site are to determine if the Rapid City area is attaining the PM<sub>10</sub>, PM<sub>2.5</sub>, Sulfur Dioxide, and Nitrogen Dioxide standards and population exposure. This property has been sold, but at this time the site can remain.

**Figure 10-1 — Rapid City Credit Union Site**



Continuous Met One BAM PM<sub>10</sub> and PM<sub>2.5</sub> particulate monitors and Teledyne Sulfur Dioxide and Nitrogen Dioxide monitors were operated at this site in 2025. The continuous particulate matter monitors provide hourly concentrations on an everyday sampling schedule. The hourly readings from the continuous PM<sub>10</sub> monitor are used to investigate high concentration days for Rapid City and to compare concentrations to the PM<sub>10</sub> National Ambient Air Quality Standards. A continuous PM<sub>2.5</sub> monitor is used to supply hourly data for investigation of high concentration days and to compare to the PM<sub>2.5</sub> standards. In 2011, continuous Sulfur Dioxide and Nitrogen Dioxide analyzers were added to the Rapid City Credit Union Site to provide data on population exposure and source oriented testing near the facilities in the quarry area. Table 10-1 contains details on the monitoring site specific to the requirements in 40 Code of Federal Regulations Part 58.

**Table 10-1 – Rapid City Credit Union Site Specifics**


<b>Parameter</b>	<b>Information</b>
Site Name	Rapid City Credit Union
AQS ID Number	46-103-0020
Street Address	106 Kinney Ave.
Geographic Coordinates	UTM Zone 13, NAD 83, Lat 44.085393 Long -103.273913
MSA	Rapid City
<b>PM<sub>10</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0798-122
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	High Concentration and Population
Sampling Method	Met One BAM-1020
Analysis Methods	Beta Attenuation
Data Use	SLAMS (Comparison to the NAAQS) and Real-Time Data
<b>PM<sub>2.5</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0308-170
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	Population and High Concentration
Sampling Method	Met One BAM-1020 w/PM <sub>2.5</sub> VSCC
Analysis Methods	Beta Attenuation
Data Use	SLAMS (Comparison to the NAAQS) Real-Time Data
<b>SO<sub>2</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQSA-0495-100
Operation Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	Population and High Concentration
Sampling Method	Teledyne T100U
Analysis Method	UV Fluorescence
Data Use	SLAMS (Comparison to the NAAQS) and Real-Time Data
<b>NO<sub>2</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Reference Method RFNA-1194-099
Operation Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	Population and High Concentration
Sampling Method	Teledyne T200
Analysis Method	Chemiluminescence
Data Use	SLAMS (Comparison to the NAAQS) and Real-Time Data

### 10.1.1 Credit Union Site PM<sub>10</sub> Data

The Rapid City Credit Union Site began operation in October of 2003. Only three months of data were collected in 2003, so 2004 is the first complete sampling year. Figure 10-2 shows a graph of the annual average PM<sub>10</sub> concentration.

The PM<sub>10</sub> annual average concentrations show a declining level each year from 2004 to 2010. In 2011, average concentration levels increased back to the level in 2009 and increased through 2013. Since 2013, average concentration levels had declined through 2018. In 2019, concentrations rose again. 2023 had the highest value at 46 micrograms per cubic meter. Levels decreased in 2024 and 2025. Testing for PM<sub>10</sub> concentrations is a priority for this site, since the Rapid City Library Site was closed at the end of 2019 and the parameter will be continued.

Figure 10-2 – Rapid City Credit Union Site PM<sub>10</sub> Annual Averages

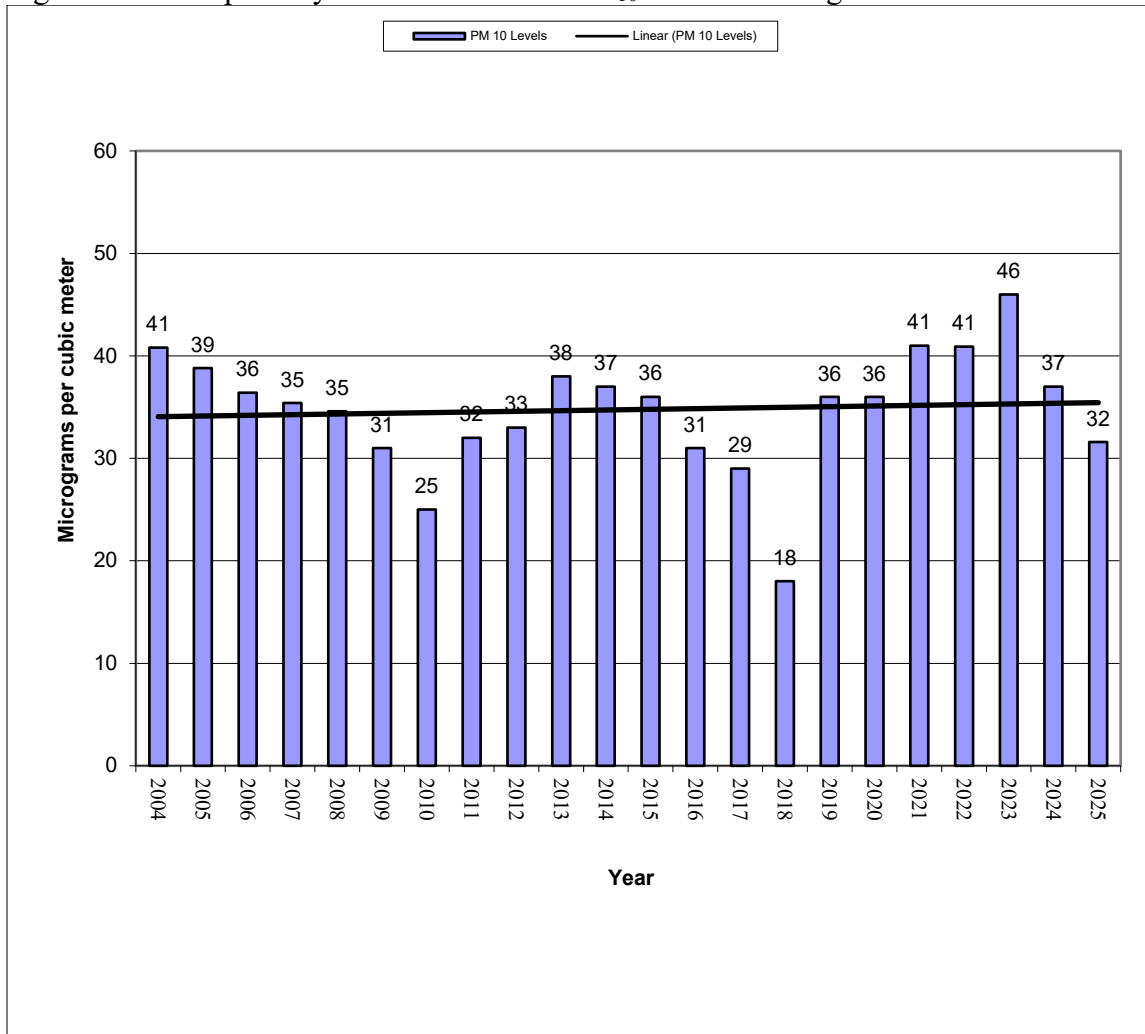


### **10.1.2 Credit Union Site PM<sub>2.5</sub> Data**

The testing for PM<sub>2.5</sub> parameter using the manual method began at this site in October 2003 and completed the first full year of testing in 2004. In 2009, a continuous method PM<sub>2.5</sub> monitor was added to the site as a special purpose monitor. Because the continuous monitor was a new method, EPA allowed the operation of the monitor as a special purpose method for up to three years before the data from the monitor was required to be compared to the PM<sub>2.5</sub> standard. By the end of 2011, the continuous monitor had operated for three years and the Met One continuous PM<sub>2.5</sub> monitor received the federal equivalent method number. Data was similar between the methods of PM<sub>2.5</sub> monitoring, so as a cost savings measure the manual PM<sub>2.5</sub> monitor was removed, and the continuous monitor became the state and local air monitoring stations monitor providing more valid data at a lower cost per year of operation.

Figure 10-3 shows the annual average for each sampling year since 2009 when the continuous monitor was setup. The annual average concentrations have varied through the years. In 2011, PM<sub>2.5</sub> annual concentrations reached its lowest level with a concentration of 4.5 micrograms per cubic meter. The highest annual average for PM<sub>2.5</sub> at this site was 9.5 micrograms per cubic meter in 2015. Smoke from wildfires in Canada and Pacific Northwest states had a large impact on the PM<sub>2.5</sub> annual average concentration in 2015, 2017, 2018, 2021, and 2023. The parameter of PM<sub>2.5</sub> will be continued at this site using the continuous monitor to determine compliance with the National Ambient Air Quality Standards and to determine any change in concentration levels.

**Figure 10-3 – Rapid City Credit Union Site PM<sub>2.5</sub> Annual Averages**

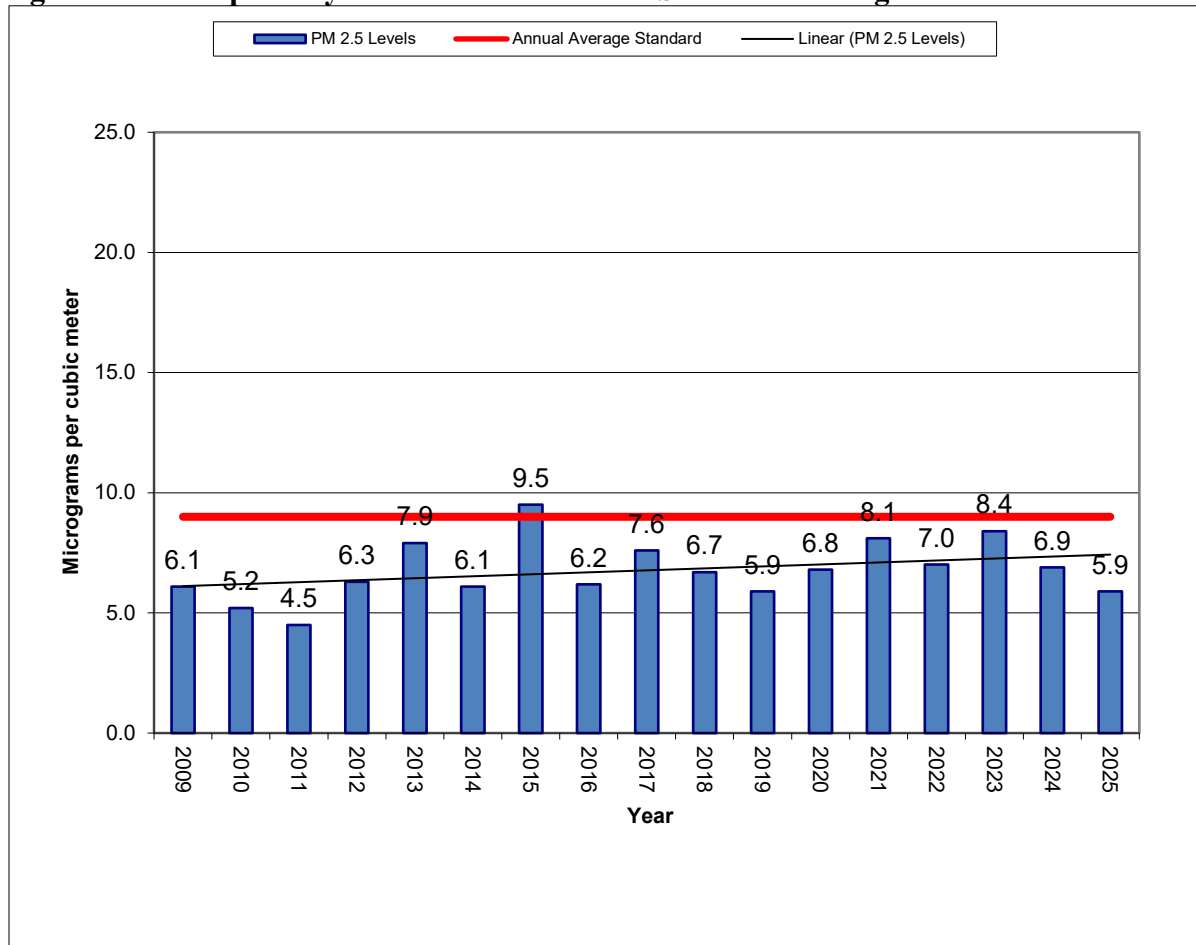


**10.1.3 Credit Union Site Sulfur Dioxide Data**

Testing for Sulfur Dioxide started at the beginning of 2011 for this site. Some testing for the parameter was done in the 1990s but that data was old and there was need for the collection of new data. The annual standard for Sulfur Dioxide was dropped when the standard was revised so the 1-hour, daily maximum, 99 percentile concentrations will be used to track trends.

See Figure 10-4 for the 1-hour daily maximum concentration of Sulfur Dioxide recorded at the Rapid City Credit Union Site. The concentration level is low. Trends indicate a decreasing Sulfur Dioxide concentration level for this site. Testing for Sulfur Dioxide will continue at this site.

**Figure 10-4 – Rapid City Credit Union Site Sulfur Dioxide 99<sup>th</sup> Percentile 1-hour Averages**

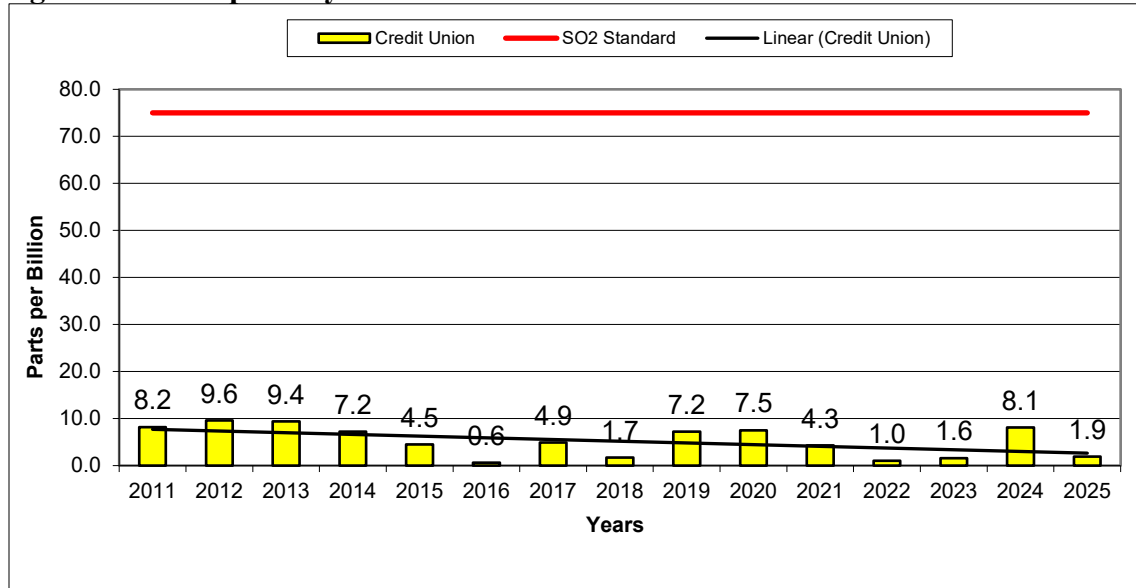


**10.1.4 Credit Union Site Nitrogen Dioxide Data**

Testing for Nitrogen Dioxide started at the beginning of 2011 for this site. Some testing for the parameter was completed in the 1990s but that data was old and there was a need for the collection of new data. The Nitrogen Dioxide standard includes a 1-hour and annual average concentration so the annual average will be represented to track trends.

See Figure 10-5 for concentrations of Nitrogen Dioxide at the Rapid City Credit Union Site. The concentrations are low. The trend line shows a slightly declining concentration level for the annual average. Testing for Nitrogen Dioxide will continue at this site to further define the pollution level trend for this site.

**Figure 10-5 – Rapid City Credit Union Site Nitrogen Dioxide Annual Averages**

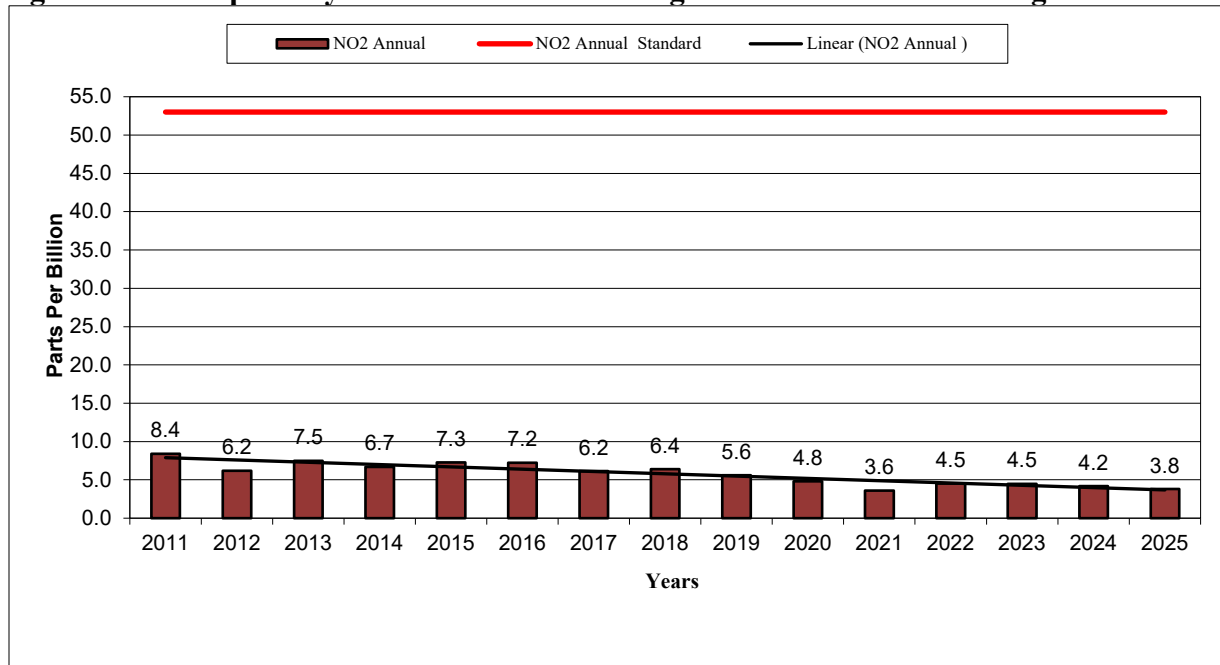

## 10.2 Black Hawk Site


Black Hawk is a small town located just north of Rapid City in Meade County north of the quarry area. Black Hawk is not an incorporated city but is a growing subdivision and is part of the Rapid City Metropolitan Statistical Area.

The Black Hawk Site was setup in the fall of 2000. The site is located on a small hill east of the Black Hawk Elementary School. PM<sub>10</sub> and PM<sub>2.5</sub> monitors were located on a sampling shelter until October 2003 when the sampling shelter was moved to the Rapid City Credit Union Site. The monitors were then located on scaffolding within a fenced area until the fall of 2006 when a shelter was added back to the site. At the end of 2004, the PM<sub>2.5</sub> monitors were removed because concentrations were the lowest in the area and the potential for concentrations over the National Ambient Air Quality Standards was very low. In 2007, the ozone analyzer was moved from Rapid City Credit Union Site to the Black Hawk Site to determine ozone concentrations outside of the modeled one microgram Nitrogen Dioxide influence area from air quality sources in western Rapid City. See Figure 10-6 for a current picture of the site looking to the northwest.

The land use around the site is mainly residential with a few service type businesses. There are no obstructions around the monitoring site. The limestone quarry industries are located to the south and southeast of the Black Hawk Site and are expanding to ore bodies located closer to this site.

The current goal of the Black Hawk Site is to determine urban background concentrations for PM<sub>10</sub> coming into the Rapid City area from the north and determine compliance with the ozone National Ambient Air Quality Standards in the Rapid City Metropolitan Statistical Area.

**Figure 10-6 – Black Hawk Site**

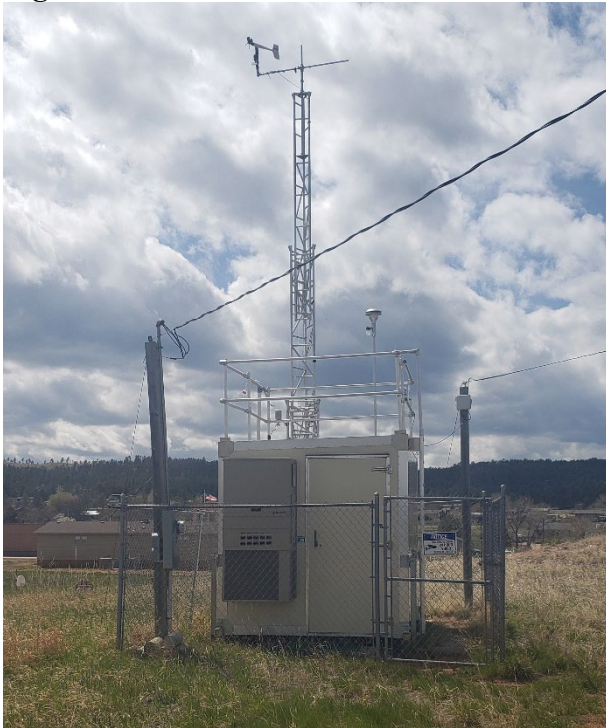

The site’s spatial scale is neighborhood for PM<sub>10</sub> and ozone sampling. The objectives of the PM<sub>10</sub> sampling are high concentration, population, and source impact. The objectives of the ozone sampling are high concentration and population. The goals are being met. Table 10-2 contains details on the monitoring site specific to the requirements in Title 40 of the Code of Federal Regulations Part 58.

**Table 10-2 – Black Hawk Site Specifics**


<b>Parameter</b>	<b>Information</b>
Site Name	Black Hawk Elementary
AQS ID Number	46-093-0001
Street Address	7108 Seeaire Street
Geographic Coordinates	UTM Zone 13, NAD 83, Lat 44.153416 Long -103.315788
MSA	Rapid City
<b>PM<sub>10</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0798-122
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	Population, Urban Background
Sampling Method	Met One BAM-1020
Analysis Methods	Beta Attenuation
Data Use	SLAMS (Comparison to the NAAQS)

Parameter	Information
<b>Ozone</b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQOA-0880-047
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	Population and High Concentration
Sampling Method	Thermo 49iQ
Analysis Methods	Ultraviolet
Data Use	SLAMS (Comparison to the NAAQS) and Real-time Data

### 10.2.1 Black Hawk Site PM<sub>10</sub> Data

Figure 10-7 contains a graph showing the PM<sub>10</sub> annual averages for the Black Hawk Site. The first three years of PM<sub>10</sub> concentration levels remained about the same. In 2004, the annual average dropped four micrograms per cubic meter. The highest annual average was 21 micrograms per cubic meter recorded in both 2001 and 2003. The lowest level of 9 micrograms per cubic meter was recorded in 2025. The overall trend shows a decrease in concentration. Plans are to continue to test for PM<sub>10</sub> at this location.


**Figure 10-7 – Black Hawk Site – PM<sub>10</sub> Annual Averages**

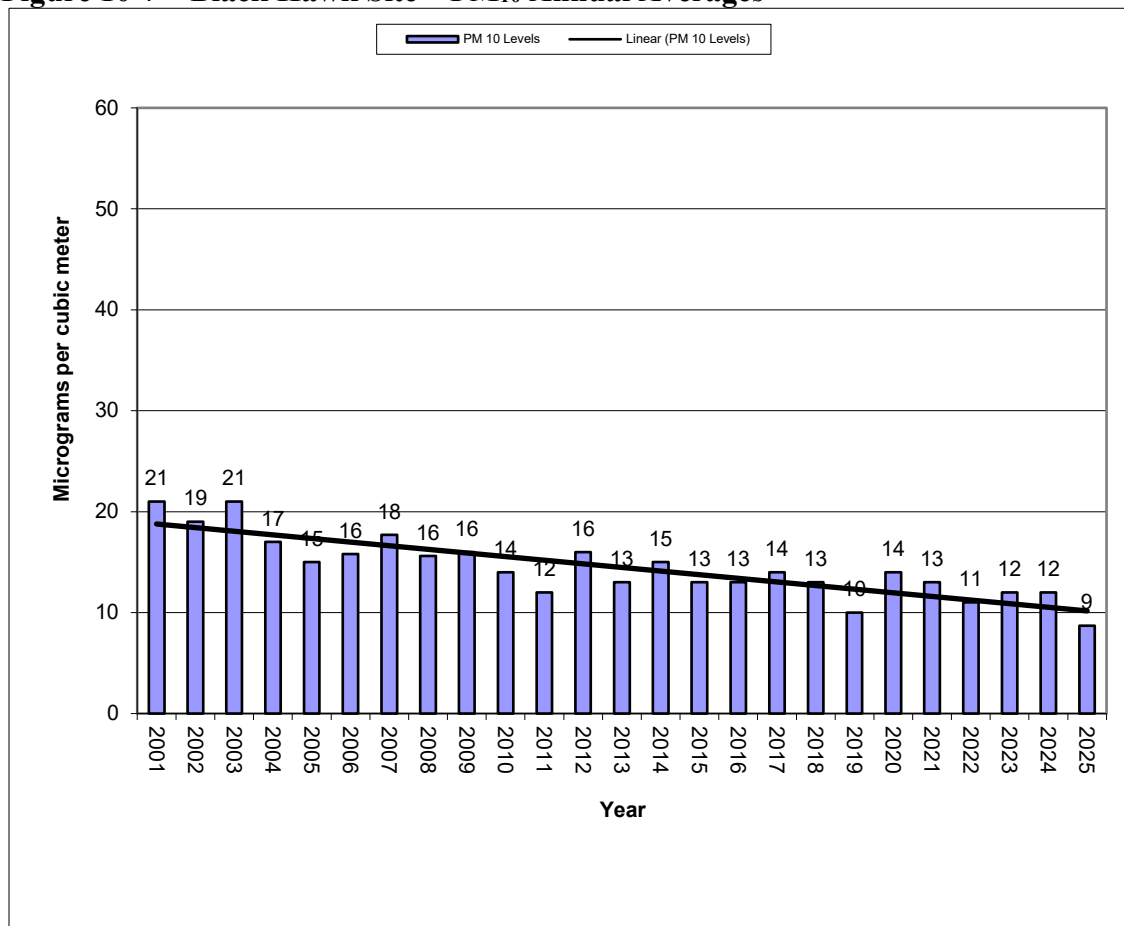

### 10.2.2 Black Hawk Site Ozone Data

The 2025 sampling year is the 18th ozone season at the Black Hawk Site (see Figure 10-8). In the first year of testing (2008), the site recorded the second highest ozone level in the state. In 2023 and 2024, ozone levels increased this is believed to be due to wildfire smoke. The levels decreased in 2025. The overall trends show an increasing ozone concentration level. Plans are to continue to test for ozone at this location.

Figure 10-8 – Black Hawk Site Ozone Yearly 4th Highest 8-hour Averages

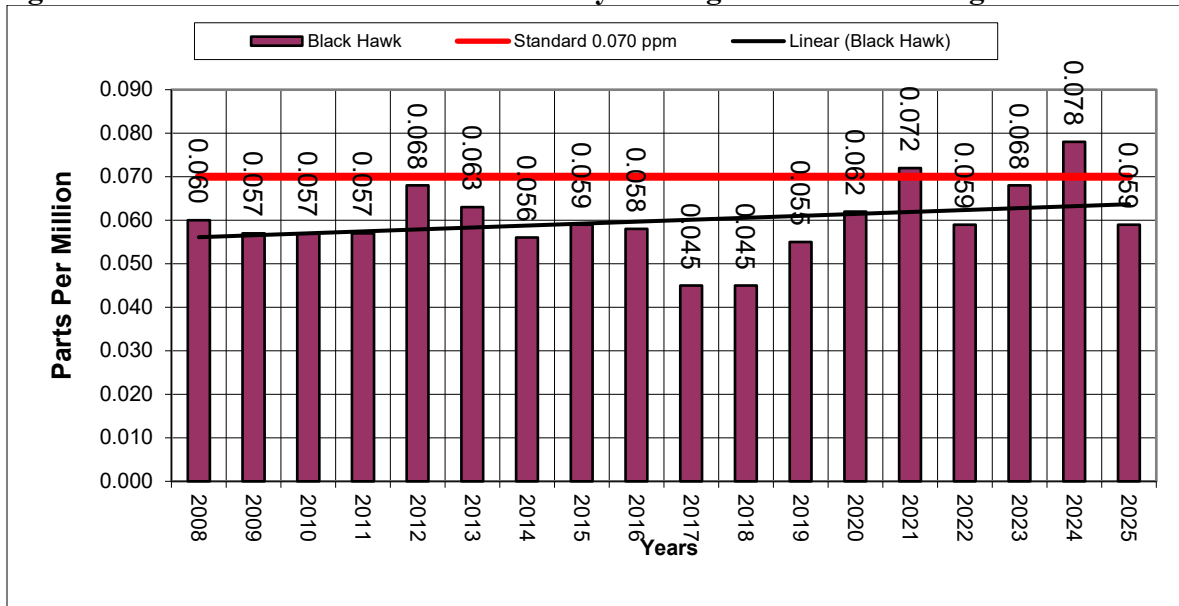

### 10.3 Badlands Site

Badlands National Park is one of two Class I areas in South Dakota designated for visibility protection under the Clean Air Act. The Badlands area is a large national park that attracts more than one million visitors each year. The Badlands area is a dry semi-desert area with short prairie grass and beautiful sandstone cliff vistas.

The Badlands Site was established in 2000, with manual monitors for particulate matter. Continuous monitors for particulate matter and gaseous air pollutants have been added over the years. Currently, the Badlands Site continuously monitors for PM<sub>10</sub>, PM<sub>2.5</sub>, and ozone. The site is in the southeast part of the park near the visitor center. Figure 10-9 shows a current picture of the Badlands Site.

**Figure 10-9 –Badlands Site**



The Badlands Site is located next to the Interagency Monitoring of Protected Visual Environments site operated by the National Park Service. The Interagency Monitoring of Protected Visual Environments data is used to determine what types of sources are impacting the visibility of the national parks in South Dakota. The goal of having a state and local air monitoring station site next to the Interagency Monitoring of Protected Visual Environments site is to determine air pollution background levels and to see if pollution trends show long range transport of air pollution into the state. Table 10-3 contains details on the monitoring site specific to the requirements in Title 40 of the Code of Federal Regulations Part 58.

**Table 10-3 – Badlands Site Specifics**

<b>Parameter</b>	<b>Information</b>
Site Name	Badlands
AQS ID Number	46-071-0001
Street Address	25216 Ben Reifel Road, Interior, South Dakota 57750
Geographic Coordinates	UTM Zone 14, NAD 83, Lat 43.743660 Long -101.941241
MSA	None


<b>Parameter</b>	<b>Information</b>
<b>PM<sub>10</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0798-122
Operating Schedule	Hourly
Scale Representation	Regional
Monitoring Objective	Background, Transport
Sampling Method	Met One BAM-1020
Analysis Method	Beta Attenuation
Data Use	SLAMS (Comparison to the NAAQS) Real-time Data
<b>PM<sub>2.5</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0308-170
Operating Schedule	Hourly
Scale Representation	Regional
Monitoring Objective	Background, Transport
Sampling Method	Met One BAM-1020 w/PM <sub>2.5</sub> VSCC
Analysis Method	Beta Attenuation
Data Use	Real-time Data and SLAMS (Comparison to the NAAQS)
<b>Ozone</b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQOA-0992-087
Operating Schedule	Hourly
Scale Representation	Regional
Monitoring Objective	Background, Transport
Sampling Method	Teledyne T400
Analysis Method	Ultraviolet
Data Use	SLAMS (Comparison to the NAAQS) and Real-time Data

### 10.3.1 Badlands Site – PM<sub>10</sub> Data

PM<sub>10</sub> data has been collected at this site since 2000. The PM<sub>10</sub> manual monitors were operated on an every sixth day schedule from 2000 through 2004. As of 2005, continuous monitoring methods have been employed.

Figure 10-10 contains a graph of the annual averages for the Badlands Site since the continuous monitor was installed. The annual average concentration over the last 21 years varied only slightly overall. The highest annual average concentration of 14 micrograms per cubic meter was recorded in 2021. The lowest annual average concentration of 7 micrograms per cubic meter was recorded in 2009. The PM<sub>10</sub> concentrations recorded at this site are some of the lowest levels in the state and represent background levels for the western half of the state. This parameter is meeting the goals for testing at this site and will be continued.

**Figure 10-10 – Badlands Site – PM<sub>10</sub> Annual Averages**

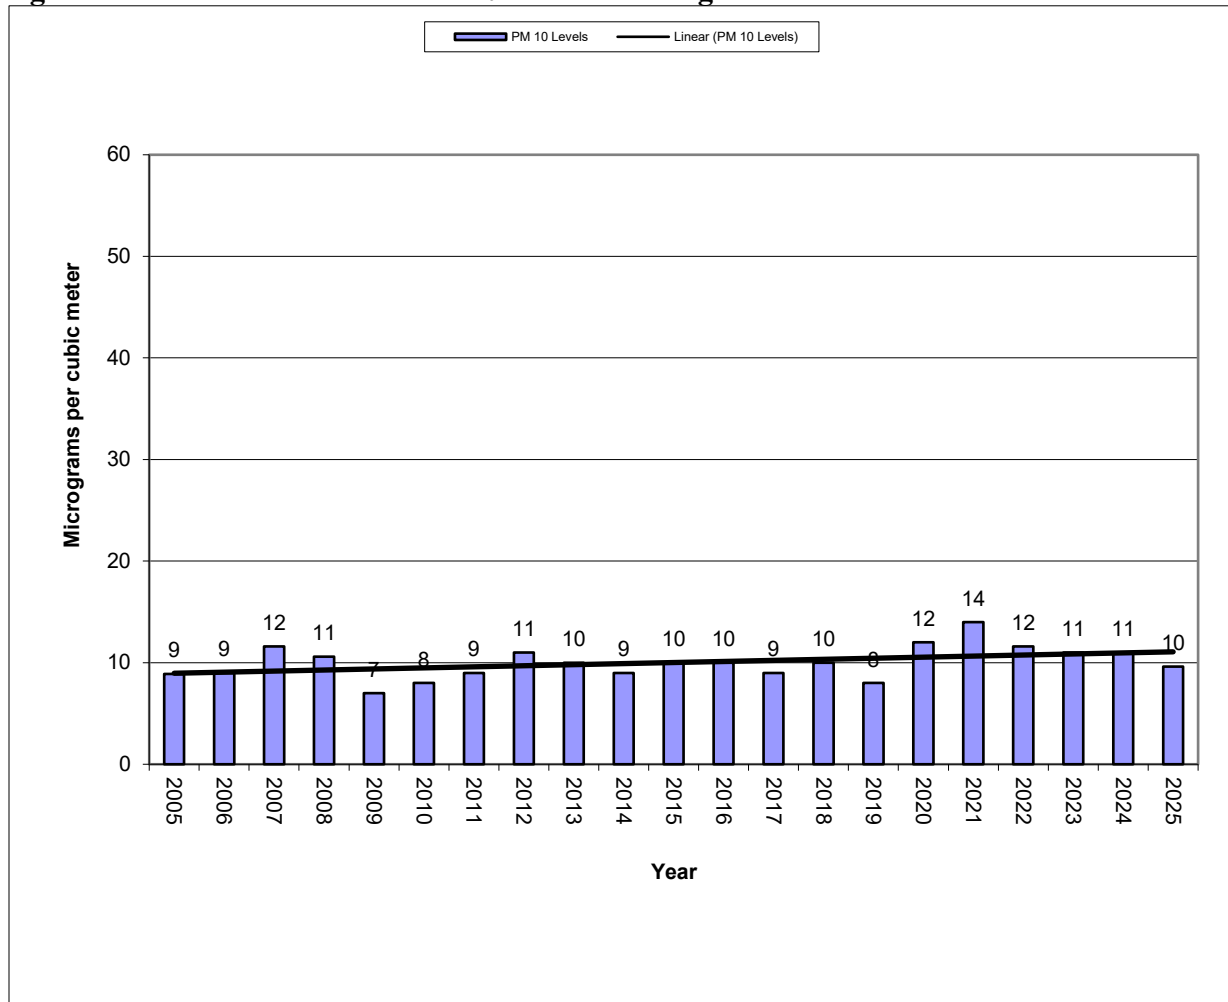


**10.3.2 Badlands Site – PM<sub>2.5</sub> Data**

The PM<sub>2.5</sub> manual monitors ran on an every third day schedule from 2001 to 2008. Beginning in 2009, the continuous Met One BAM-1020 Federal Equivalent Method replaced the manual RAAS 100, and the sampling schedule went to every day providing hourly and 24-hour average concentrations.

Figure 10-11 contains a graph of the annual averages for the continuous monitoring data. The annual averages for the Badlands Site show a concentration range with a high of 7.6 micrograms per cubic meter in 2025 and a low of 2.5 micrograms per cubic meter in 2016. Like the annual PM<sub>10</sub> concentrations, PM<sub>2.5</sub> concentrations at this site have varied slightly over the years and are the some of the lowest in the state. PM<sub>2.5</sub> concentrations at the Badlands Site represent background levels for western South Dakota. This parameter is meeting the goals for testing at this site and will be continued.

**Figure 10-11 – Badlands Site – PM<sub>2.5</sub> Annual Averages**

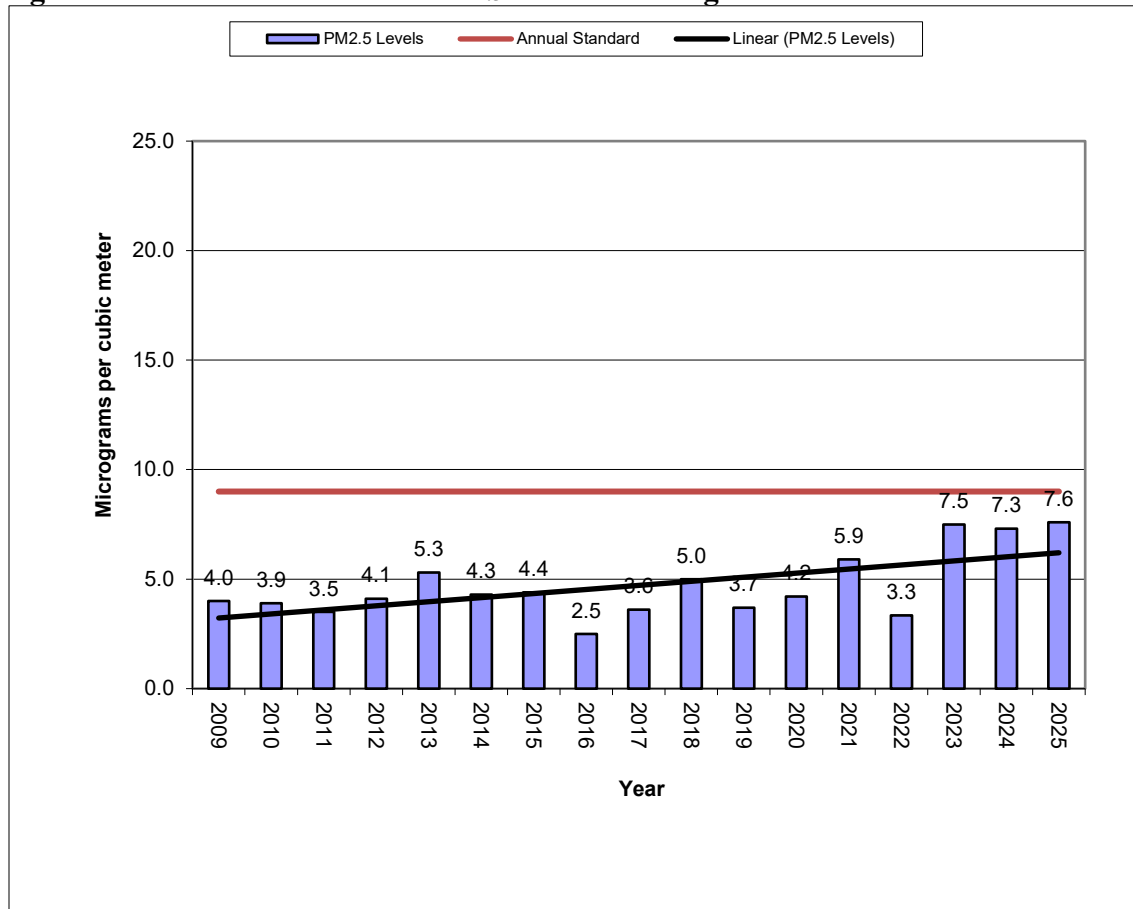


### **10.3.3 Badlands Site Ozone Data**

The first year of testing at the Badlands Site for ozone was in 2003, with equipment being operated by the National Park Service. The department completed quarterly audits of the ozone analyzer so data could be compared to the National Ambient Air Quality Standards. At the beginning of 2008 sampling year, the department took over the operation of the ozone analyzer.

Concentrations of ozone at this site have varied up and down over the 23 years of testing. The yearly 4<sup>th</sup> highest 8-hour average ranged from a high of 0.075 parts per million in 2024 to a low of 0.052 parts per million in 2011. The 2024 value is thought to be influenced by wildfire smoke. The 2025 value decreased. Currently it appears the ozone concentrations are steady. See Figure 10-12 to view a graph of the yearly 4<sup>th</sup> highest 8-hour average.

This parameter will continue to be a priority at this location because of past concentration levels at a site representing a rural area in western South Dakota and the testing is meeting the needs to continue the sampling effort.

**Figure 10-12 – Badlands Site – Ozone Yearly 4th Highest 8-hour Averages**

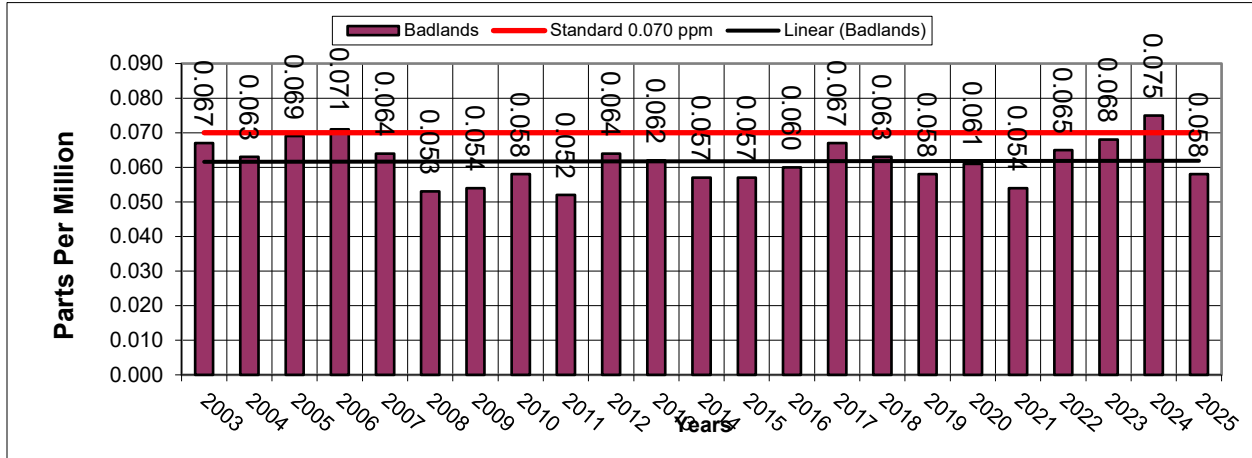

#### 10.4 Wind Cave Site

The Wind Cave National Park is one of two Class I areas in South Dakota designated for visibility protection under the Clean Air Act. The Wind Cave area is a large national park located in the southern Black Hills of South Dakota.

The Wind Cave Site was established in 2005, with manual monitors for PM<sub>2.5</sub> and continuous monitors for PM<sub>2.5</sub>, PM<sub>10</sub>, Sulfur Dioxide, Nitrogen Dioxide, and ozone. At the end of 2010, the manual PM<sub>2.5</sub> monitors were removed from the site leaving only the continuous PM<sub>2.5</sub> monitor for this parameter. Currently, the Wind Cave Site continuously monitors for PM<sub>10</sub>, PM<sub>2.5</sub>, and ozone. The site is located a short distance west of the visitor center. Figure 10-13 shows a current picture of the Wind Cave Site.

**Figure 10-13 – Wind Cave Site**



The monitoring equipment at the Wind Cave Site is in a sampling shelter next to the Interagency Monitoring of Protected Visual Environments site operated by the National Park Service. The Interagency Monitoring of Protected Visual Environments data will be used to determine what types of sources are impacting the visibility of the national parks in South Dakota. The purpose of having a State and Local Air Monitoring Stations site next to the Interagency Monitoring of Protected Visual Environments site is to determine air pollution background levels, and to see if pollution trends show long range transport of air pollution from outside of the state. Table 10-4 contains details on the monitoring site specific to the requirements in Title 40 of the Code of Federal Regulations Part 58.

**Table 10-4 – Wind Cave Site Specifics**


<b>Parameter</b>	<b>Information</b>
Site Name	Wind Cave
AQS ID Number	46-033-0132
Street Address	290 Elk Mountain Camp Road, Hot Springs, South Dakota
Geographic Coordinates	UTM Zone 13, NAD 83, Lat 43.557560 Long -103.483731
MSA	Rapid City
<b>PM<sub>10</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0798-122
Operating Schedule	Hourly
Scale Representation	Regional
Monitoring Objective	Background, Transport
Sampling Method	Met One BAM - 1020
Analysis Method	Beta Attenuation
Data Use	SLAMS (Comparison to the NAAQS) Real-time Data
<b>PM<sub>2.5</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0308-170
Operating Schedule	Hourly
Scale Representation	Regional
Monitoring Objective	Background, Transport
Sampling Method	Met One BAM-1020 w/PM <sub>2.5</sub> VSCC
Analysis Method	Beta Attenuation
Data Use	Real-time Data and SPMs
<b>Ozone</b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQOA-0992-087
Operating Schedule	Hourly
Scale Representation	Regional
Monitoring Objective	Background, Transport
Sampling Method	Teledyne T400
Analysis Method	Ultraviolet
Data Use	SLAMS (Comparison to the NAAQS) Real-time Data

### 10.4.1 Wind Cave Site PM<sub>10</sub> Data

The PM<sub>10</sub> concentrations at this site are one of the lowest in the state and are similar in concentrations as the Badlands Site. The Wind Cave Site is the most remote site in the state and a site that has no influence from industry and agriculture activities near the location. Figure 10-14 contains a graph showing the annual average PM<sub>10</sub> concentrations.

The 2019 and 2022 PM<sub>10</sub> concentrations were the lowest they have been at the site. In 2020 and 2021, the concentrations were the highest they have been at the site. The trend line indicates steady concentration levels over the 20 years of testing. The concentrations ranged from 6 to 11 micrograms per cubic meter and are very low representing background levels in western South Dakota. This parameter is meeting the goals of background, visibility protection, long range transport, and will be continued.

Figure 10-14 - Wind Cave Site – PM<sub>10</sub> Annual Averages

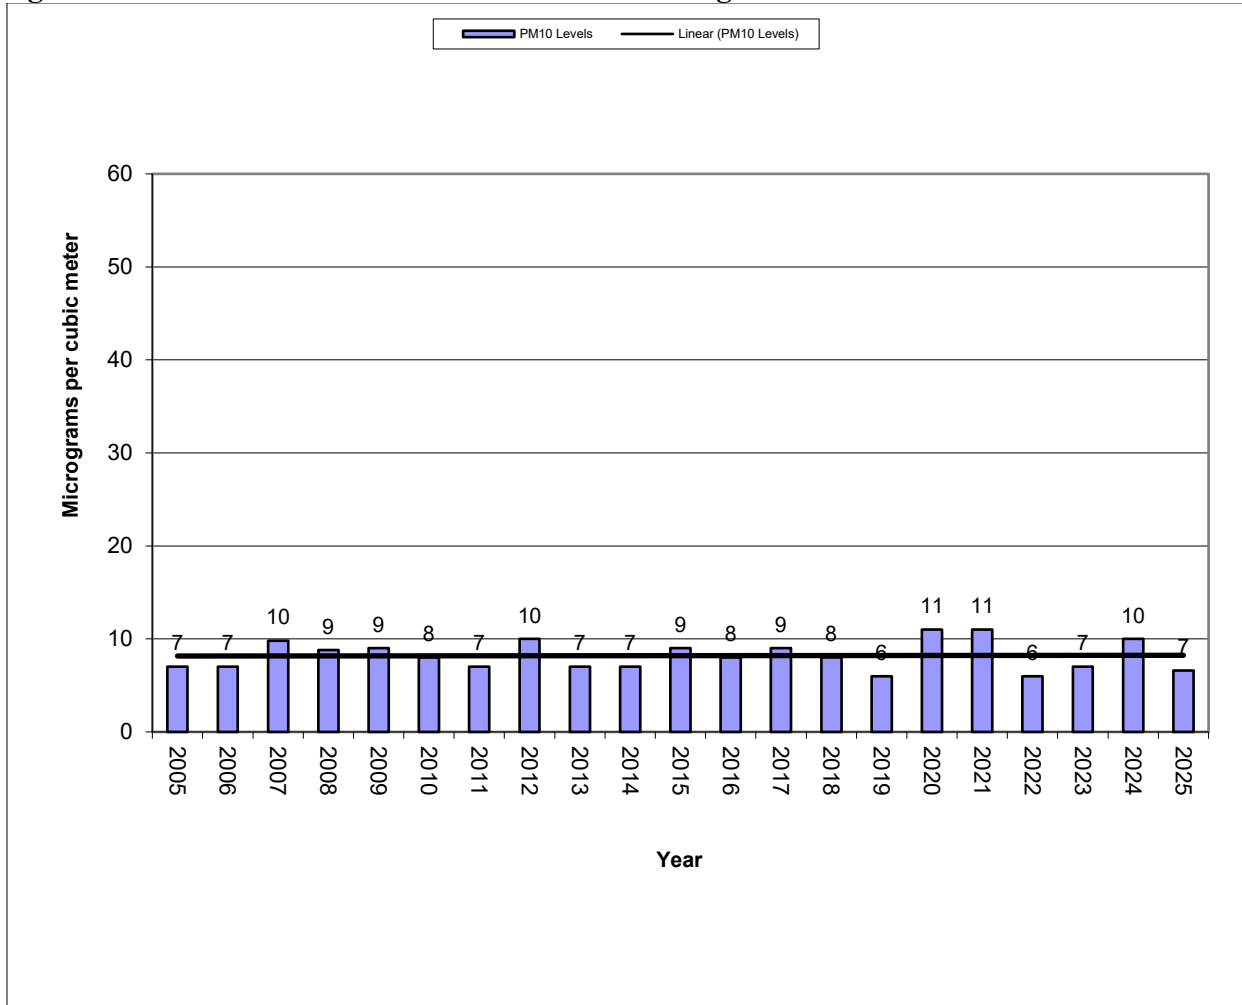


### 10.4.2 Wind Cave Site PM<sub>2.5</sub> Data

The PM<sub>2.5</sub> concentrations are like the levels recorded at the Badlands Site and are some of the lowest in the state. Figure 10-15 contains a graph showing the annual average PM<sub>2.5</sub> concentration levels.

The PM<sub>2.5</sub> annual average concentrations range from 7.4 micrograms per cubic meter in 2025 to 1.9 micrograms per cubic meter in 2016. Concentrations have been increasing for this site since 2022. This parameter is meeting the goals of background, visibility protection, and long-range transport and will be continued.

**Figure 10-15 - Wind Cave Site – PM<sub>2.5</sub> Annual Averages**

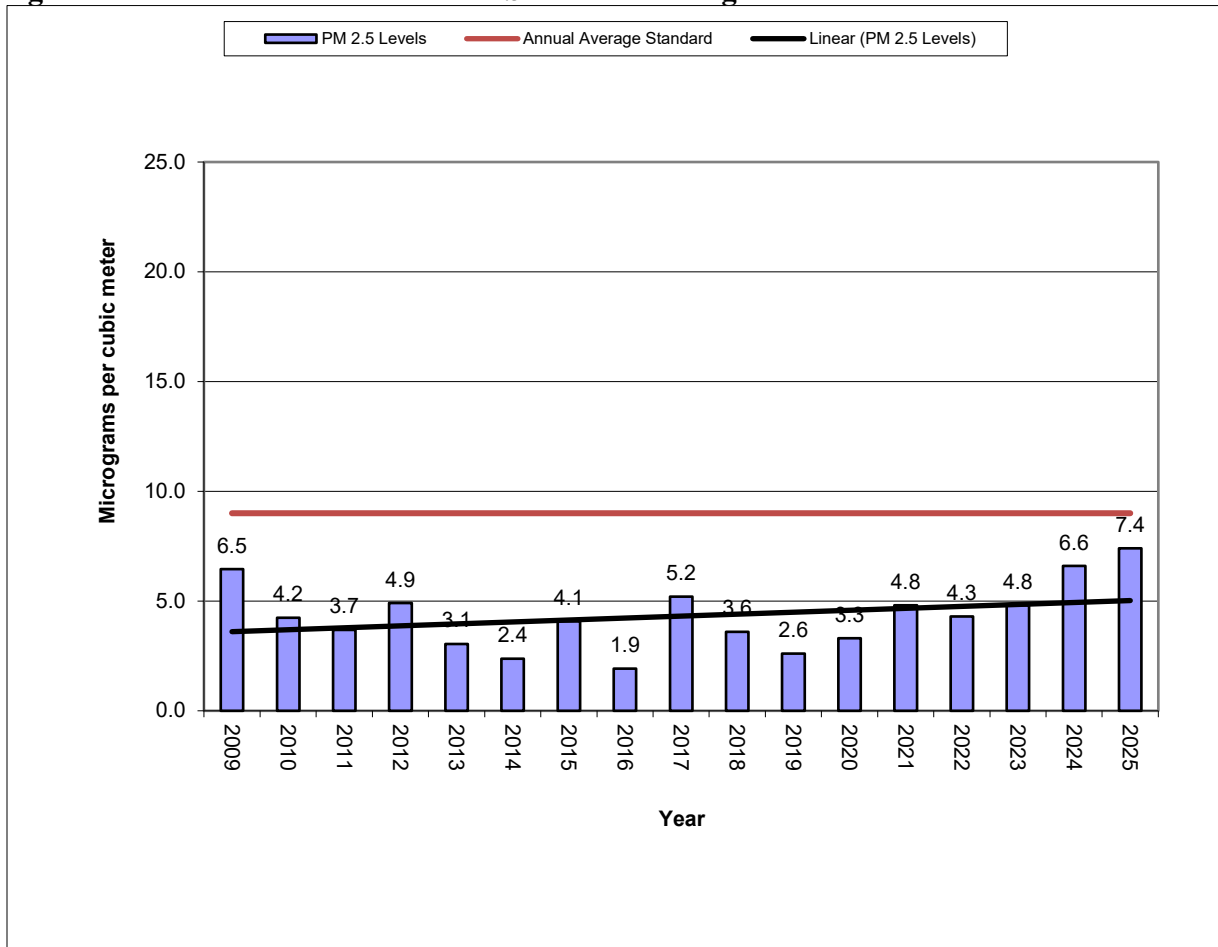


### 10.4.3 Wind Cave Site Ozone Data

Figure 10-16 contains a graph of the ozone 8-hour concentrations for the Wind Cave Site since 2005. The Wind Cave Site had the highest reported yearly 4<sup>th</sup> highest 8-hour ozone level in the state at 0.073 parts per million recorded in 2006. Ozone levels began to fall in 2007, in 2008 through 2011 the ozone concentrations leveled out. In 2012, Wind Cave ozone levels jumped back up to the approximate levels recorded when the department first started monitoring for ozone. However, in 2013 through 2016 the ozone concentrations dropped and leveled out similar to what occurred in 2008 through 2011. During 2017, there was an increase in concentration levels. During the next two years, the levels had decreased and were pretty steady for the next four years. The higher levels in 2024 are believed to be influenced by wildfire smoke. In 2025, the value decreased. The overall trend at the site shows a slightly decreasing trend in concentration.

Testing for ozone is meeting the needs of the monitoring network by detecting transport pollution levels for this area of the state. Therefore, this parameter will be continued.

**Figure 10-16 – Wind Cave Ozone Yearly 4th Highest 8-hour Averages**

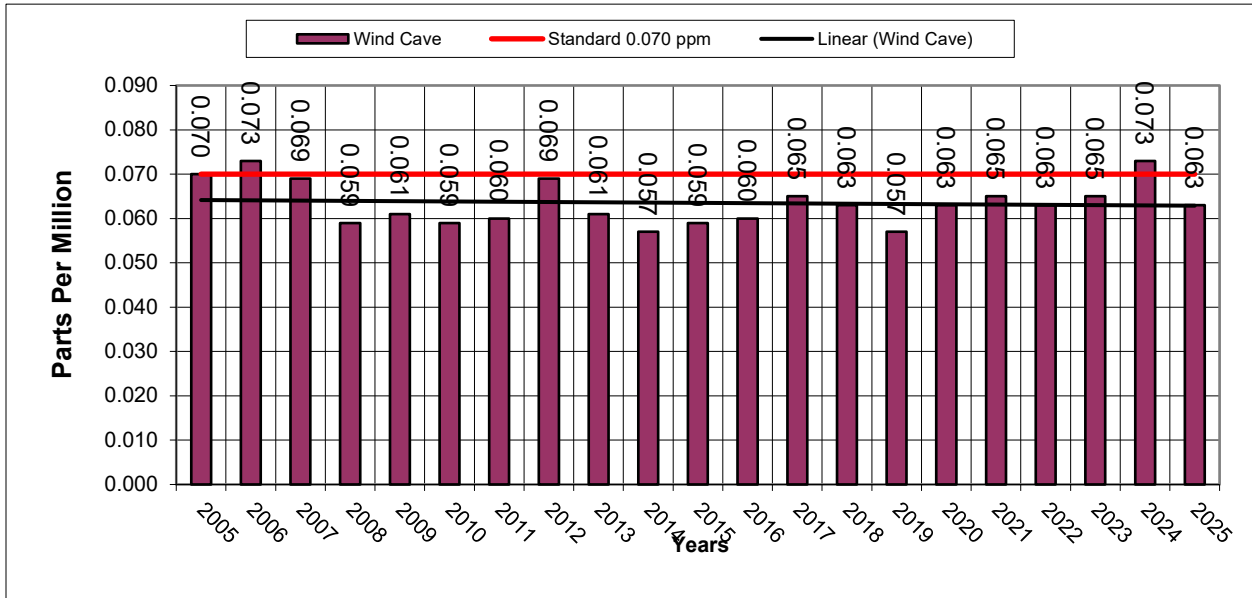

## 10.5 SF USD Site - Sioux Falls Area

Sioux Falls is the largest city in the state and is in the southeast corner of the state. The SD School site property had been sold and a new monitoring location was needed. In early 2021, monitoring transitioned from the SD School Site to the new SF USD Site. The SD School Site replaced the SF Hilltop Site on January 1, 2008. The site was the National Core site for the state and monitored for PM<sub>10</sub>, PM<sub>2.5</sub>, ozone, Carbon Monoxide, Sulfur Dioxide, and Nitrogen Dioxide. In addition, special purpose parameters were sampled including PM<sub>coarse</sub>, speciation PM<sub>2.5</sub> and Total Reactive Nitrogen. The same instruments were set up at the new site. This is a very busy monitoring site collecting more than 140,000 data points per year all loaded to the EPA national database. Figure 10-17 shows a picture of the new SF USD Site.

**Figure 10-17 – SF USD Site**



The SF USD Site is located in the northwest part of the city. The site is west of I-29. The site is located on USD's Sioux Falls campus. Table 10-5 contains details on the monitoring site specific to the requirements in Title 40 of the Code of Federal Regulations Part 58. In addition to the parameters listed in Table 10-5, a PM<sub>2.5</sub> speciation monitor is operated at an every 3<sup>rd</sup> day sampling schedule. Five years of monitoring have now been done at this new site.

**Table 10-5 – SD School Site Specifics**


<b>Parameter</b>	<b>Information</b>
Site Name	SF USD
AQS ID Number	46-099-0009
Street Address	4801 N Career Ave, Sioux Falls, SD
Geographic Coordinates	UTM Zone 14, NAD 83, Lat 43.597831 Long -96.781185
MSA	Sioux Falls
<b>PM<sub>10</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0798-122
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	Population and High Concentration
Sampling Method	Met One BAM-1020
Analysis Methods	Beta Attenuation
Data Use	SLAMS (Comparison to the NAAQS)
<b>PM<sub>2.5</sub></b>	<b>(Manual)</b>
Sampler Type	Federal Reference Method RFPS-0498-117 - switched over to Federal Reference Method RFPS-0498-116
Operating Schedule	Every 3 <sup>rd</sup> Day
Scale Representation	Neighborhood
Monitoring Objective	Population and High Concentration
Sampling Method	Partisol 2000 w/VSCC – switched over to BGI PQ200-VSCC
Analysis Methods	Gravimetric
Data Use	SLAMS (Comparison to the NAAQS)
<b>PM<sub>10-2.5</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0709-185
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	Population and High Concentration
Sampling Method	Met One BAM-1020
Analysis Methods	Beta Attenuation
Data Use	SLAMS (Comparison to the NAAQS)
<b>PM<sub>2.5</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0308-170
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	Population and High Concentration
Sampling Method	Met One BAM-1020 w/PM <sub>2.5</sub> VSCC
Analysis Methods	Beta Attenuation
Data Use	SLAMS (Comparison to the NAAQS)
<b>Ozone</b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQOA-0992-087
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	High Concentration and Population

<b>Parameter</b>	<b>Information</b>
Sampling Method	Teledyne T400
Analysis Methods	Ultraviolet
Data Use	SLAMS (Comparison to the NAAQS), Real-time Data
<b>NO<sub>2</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Reference Method RFNA-1194-099
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	High Concentration and Population
Sampling Method	Teledyne T200
Analysis Methods	Chemiluminescence detection
Data Use	SLAMS (Comparison to the NAAQS), Real-time Data
<b>NO<sub>y</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Reference Method RFNA-1194-099
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	Population
Sampling Method	Teledyne T200U
Analysis Methods	Chemiluminescence NO-Dif-NO <sub>y</sub>
Data Use	SPMs
<b>SO<sub>2</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQSA-0495-100
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	High Concentration and Population
Sampling Method	Teledyne T100U
Analysis Methods	UV Fluorescence
Data Use	SLAMS (Comparison to the NAAQS), Real-time Data
<b>CO</b>	<b>(Continuous)</b>
Sampler Type	Federal Reference Method RFCA-1093-093
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	High Concentration and Population
Sampling Method	Teledyne 300EU
Analysis Methods	Gas/Filter/Correlation
Data Use	SLAMS (Comparison to the NAAQS), Real-time Data

### 10.5.1 SF USD Site PM<sub>10</sub> Data

The highest annual average at the SF USD Site was for the partial year of 2021 at 23 micrograms per cubic meter. 17 micrograms per cubic meter in 2024 was the lowest annual average (see figure 10-18). This parameter is meeting the goals of high concentration and population and will be continued.

Figure 10-18 – SF USD Site – PM<sub>10</sub> Annual Averages

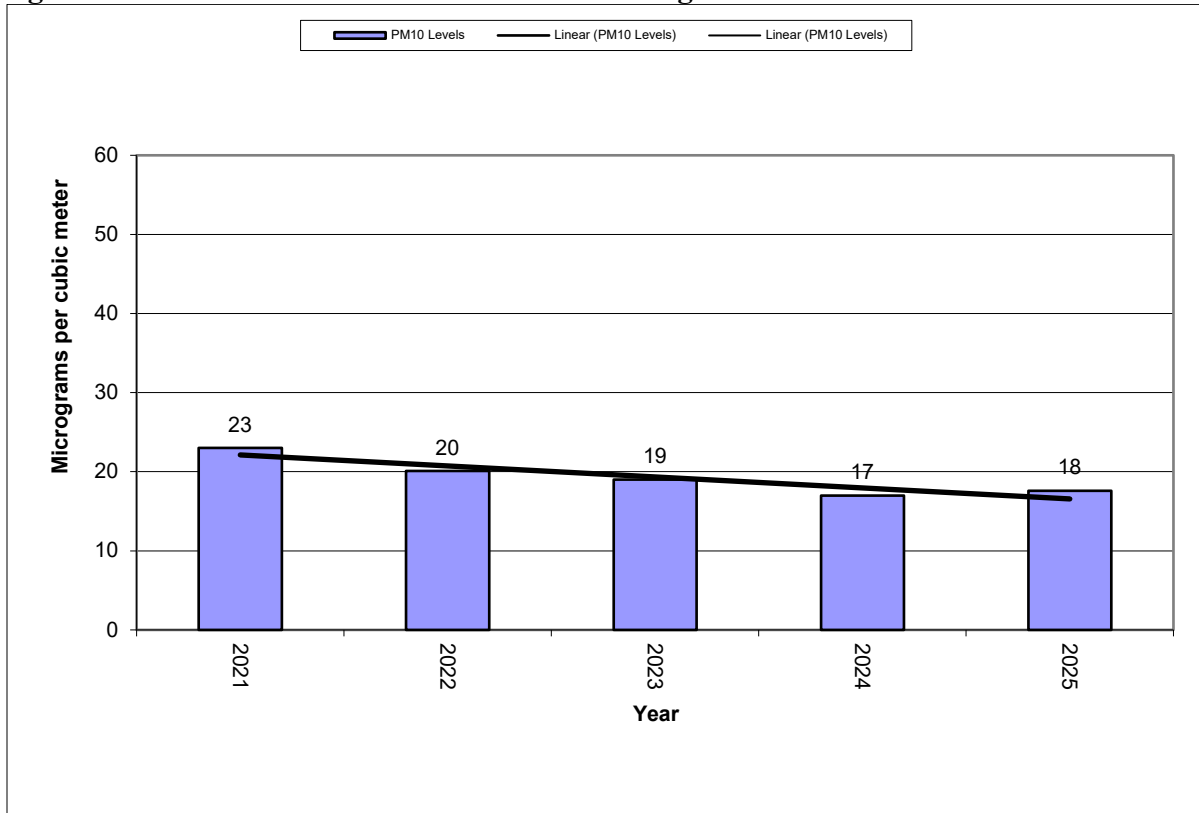

### 10.5.2 SF USD Site – PM<sub>2.5</sub> Data

The highest annual average at the SF USD Site was for the partial year of 2021 at 7.1 micrograms per cubic meter. The lowest annual average was 4.5 micrograms per cubic meter in 2024 (see figure 10-19). The PM<sub>2.5</sub> collocation CV requirements were not met for the 2022 or 2024 data.

In early 2024, the partisol manual monitors were replaced with new BGI manual monitors. The monitors initially seemed to work without issue, but problems quickly started. The monitor runs need to be setup in advance in order for the run to occur and be recorded. The date and duration of the run need to be programmed into the BGI before each run, and once the run has finished, that data needs to be downloaded.

The issue with the BGI monitors is that the system will freeze at random points unknowingly. When the equipment freezes, the system will not change the current conditions until the power was completely disconnected. There is no way to know if the monitor froze until after the sample is collected. At times the monitor would freeze before the sample run was supposed to start, which would result in no sample collected. If the sample run started, and then the monitor froze, the pump would continue to run until the power was disconnected. Based on the collection schedule of the samples, the pump would at times run for almost 6 days which would reduce the lifespan of the pump as it is not designed to run continuously for an extended period. Whenever the monitor freezes during the run, the sample becomes invalid, because there is no way to determine the details of the run. The persistent issue of the monitors freezing has resulted in a huge portion of the scheduled data collection to be missed.

Mesa Labs has been contacted numerous times in an attempt to fix the monitors. Initially, they said the boards were the issue, and a new board would be the fix. They sent numerous boards which were promptly replaced, and the issues persisted. They are well aware of the issue and after further communication we have been told that there is currently no fix to the issues that we are facing. Mesa Labs has indicated they are working on a fix, but there is no timeline for when it will be available. The initial estimate has come and gone, and no update has been given. After missing over an entire quarter of collocation, the old Thermo Scientific Partisol monitors were re-installed in April 2025, while we waited for an update from Mesa Labs.


Mesa Labs was ultimately unable to fulfill their commitment to provide fully functional monitors. In June 2025, we received replacement boards that were described as newly revised and completely free of previous defects. The Mesa Labs BGI monitors were quickly reinstalled. While performance initially appeared improved, the same issues soon re-emerged, accompanied by additional problems that made scheduling runs difficult to nearly impossible. Mesa Labs was unable to provide any effective solutions, and these issues and excuses persisted through December 2025.

At that time, a formal return request was submitted to Mesa Labs on the basis that the monitors had never operated as intended. The request was denied on the grounds that we were beyond the five-day return window. Despite repeated assurances that a resolution was forthcoming, similar assurances had been given numerous times before, and continued delays were no longer acceptable.

In early February 2026, previously retired Thermo Partisol monitors were temporarily reinstalled while we awaited delivery of new equipment. We have since procured Met One E-FRM-DC monitors, which have been installed and are operational as of April 17, 2026.

This parameter is meeting the goals of high concentration and population and will be continued.


**Figure 10-19 – SF USD Site – PM<sub>2.5</sub> Annual Averages**

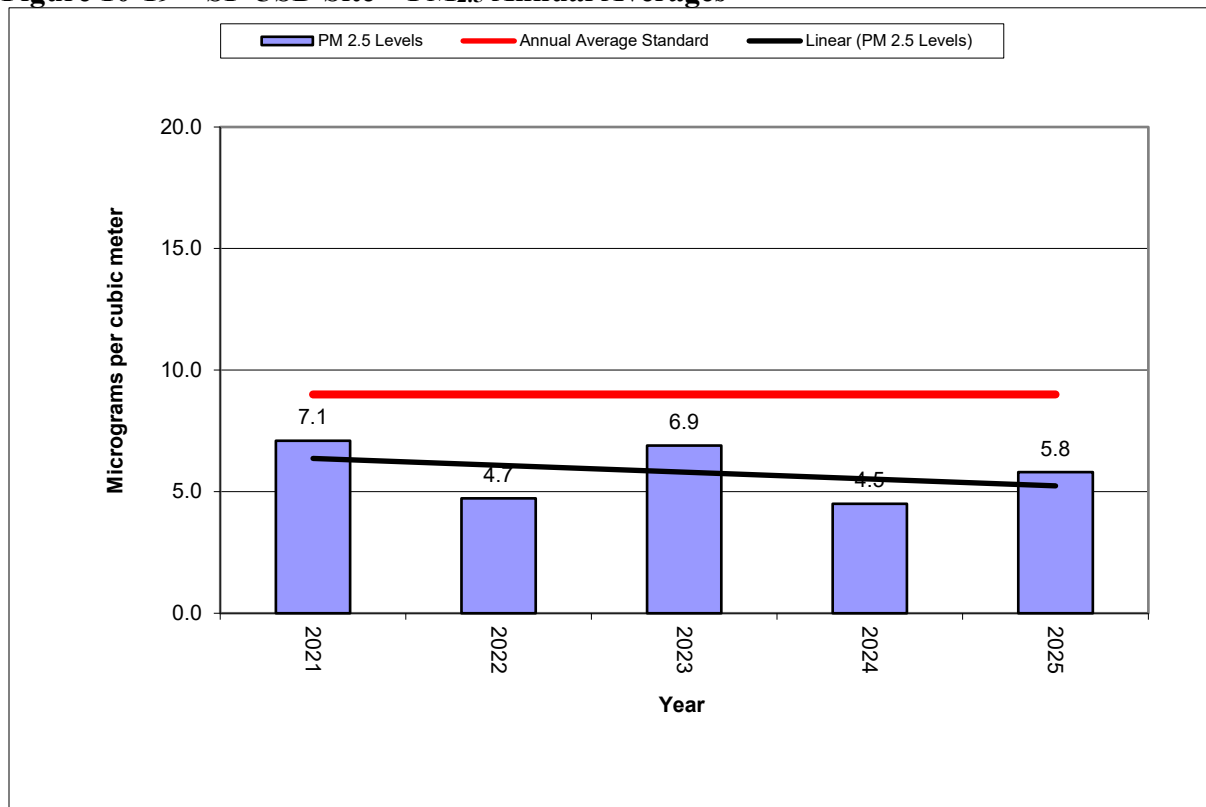

**10.5.3 SF USD Site Ozone Data**

The 4<sup>th</sup> highest 8-hour average ozone concentration recorded at this site in 2025 was 0.063 parts per million (see Figure 10-20). Wildfires during 2023 were thought to have influenced the concentrations. This parameter is meeting the goals of high concentration and population testing and will be continued at this site.


**Figure 10-20 – SF USD Site - Ozone Yearly 4<sup>th</sup> Highest 8-Hour Averages**

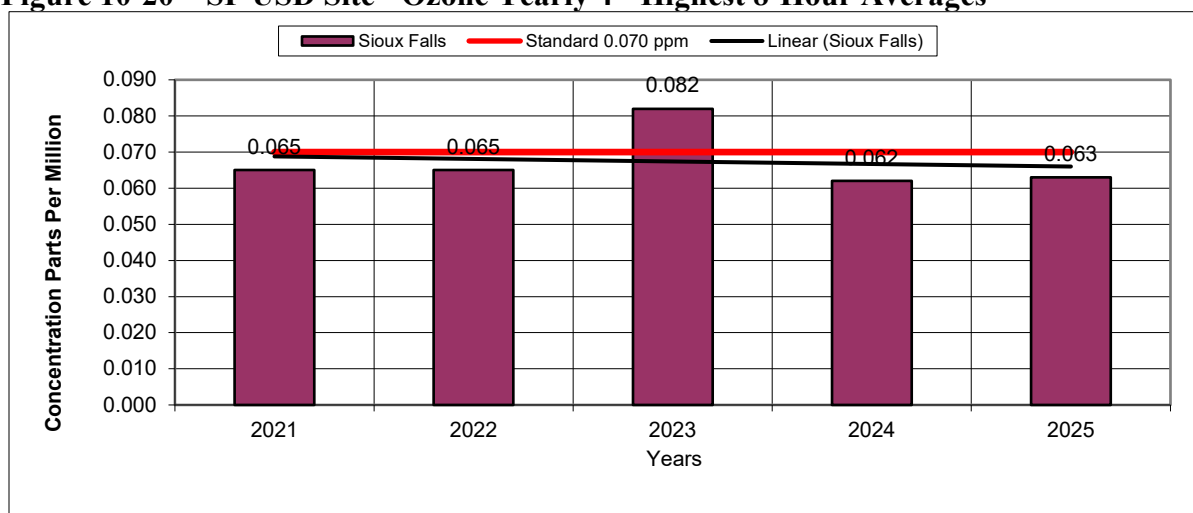

### 10.5.4 SF USD Site Sulfur Dioxide Data

The highest 1-hour 99<sup>th</sup> percentile reading at this site was 3.5 parts per billion in 2021 and the lowest was 1.1 parts per billion in 2023, 2024, and 2025 (see Figure 10-21). This parameter is meeting the goals of high concentration and population testing and will be continued at this site.


Figure 10-21 – SF USD Site – Sulfur Dioxide Yearly 1-hour 99th Percentile

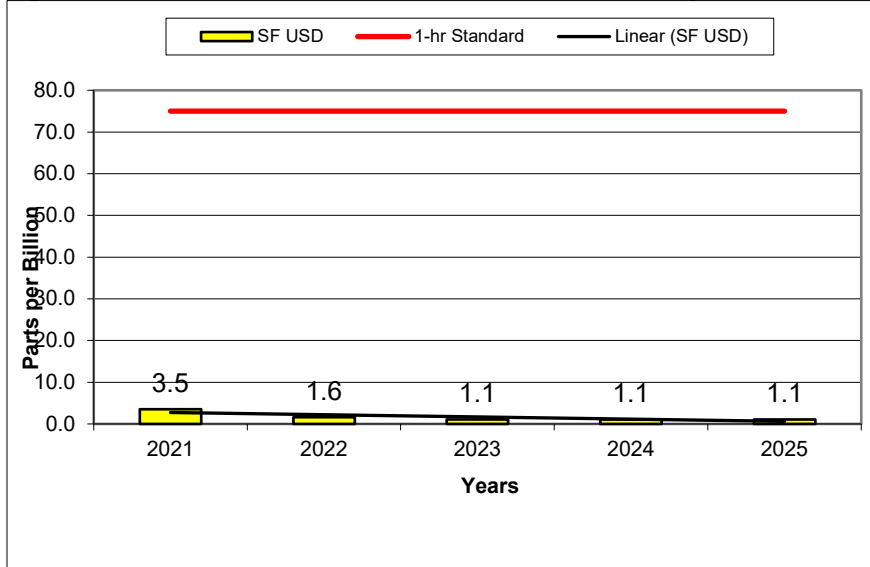

### 10.5.5 SF USD Nitrogen Dioxide Data

The highest annual average reading at this site was 6.4 parts per billion in 2024 and the lowest annual average reading at this site was 3.7 parts per billion in 2022 (see Figure 10-22). This parameter is meeting the goals of high concentration and population testing and will be continued at this site.

**Figure 10-22 – SF USD Site – Nitrogen Dioxide Annual Averages**

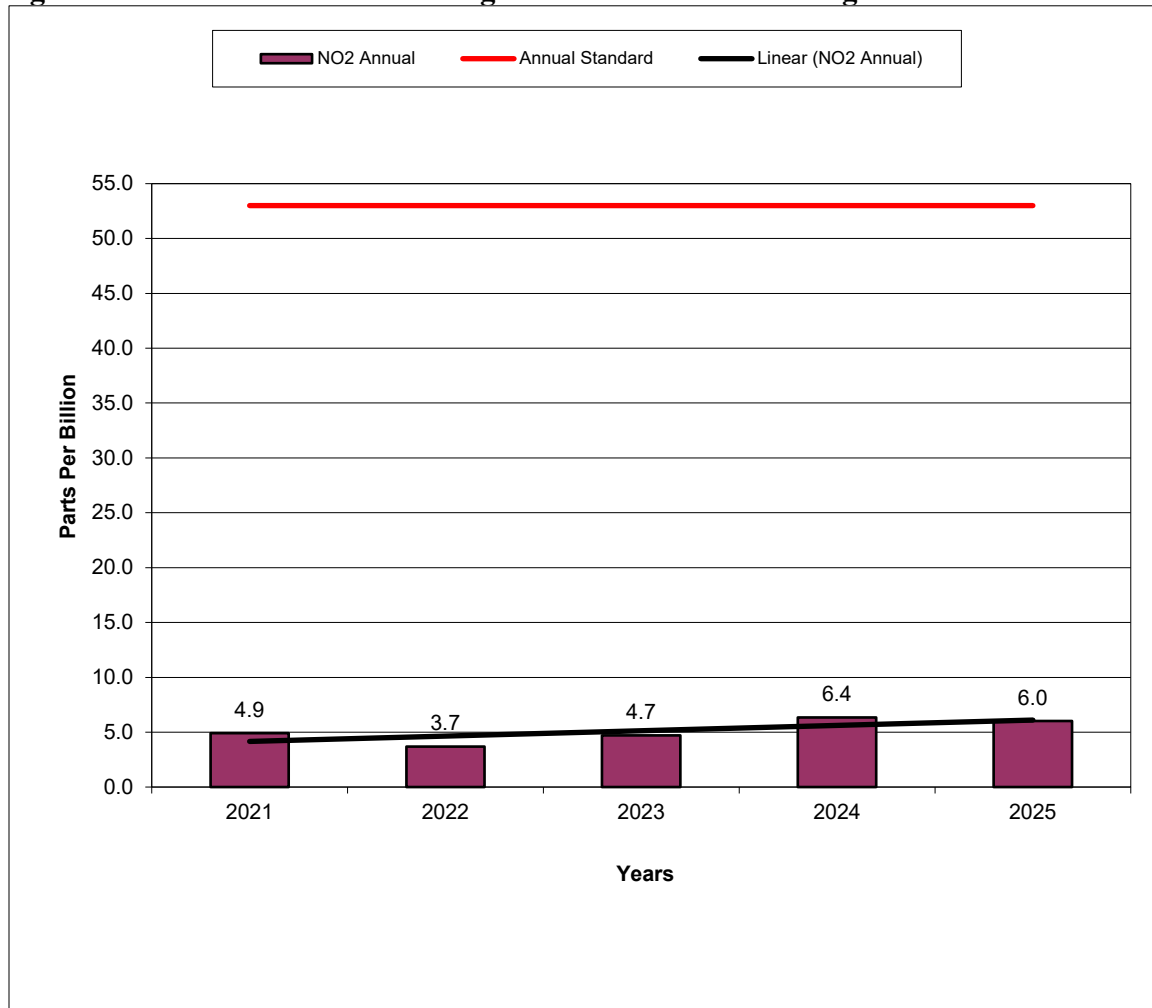


### **10.5.6 SD USD Site Carbon Monoxide Data**

The department operates just one Carbon Monoxide analyzer, and it is located at our National Core site in Sioux Falls. A Carbon Monoxide analyzer was located at Union County #1 for a few years but has since been shut down. The SD School Site began testing for Carbon Monoxide in 2011 and was moved to the SD USD site in early 2021. In October 2021, there were intermittent flow issues causing random flow alarms and random concentrations. This issue was worked on and finally fixed in May of 2022. Several rounds of troubleshooting and time waiting for parts was the cause of such a long repair. The monitor was working properly and collected accurate data from May 2022 through October 2022. In October of 2022, the CO analyzer again started to intermittently malfunction. A new CO analyzer had been purchased, so it was determined that we would not repair the old CO analyzer and the newly acquired analyzer would be installed.

Upon installation, the brand new analyzer had an abnormal amount of instability and an abnormal concentration. After troubleshooting, data collection and trials of parts, it was determined that the detector was malfunctioning on the new analyzer. Teledyne API’s timeline for us getting a new detector was estimated at 6 months. The analyzer was operational near mid-October 2023, so we essentially missed most of 2023 for CO data as well.

The Carbon Monoxide analyzer provides hourly concentration levels. The highest 8-hour average at the site was 1.1 parts per million in 2021 and the lowest 8-hour average was 0.4 parts per million in 2024 (see figure 10-23). This parameter is meeting the goals of high concentration and population and will be continued.

**Figure 10-23 – SF USD Site – Carbon Monoxide 8-hour averages**

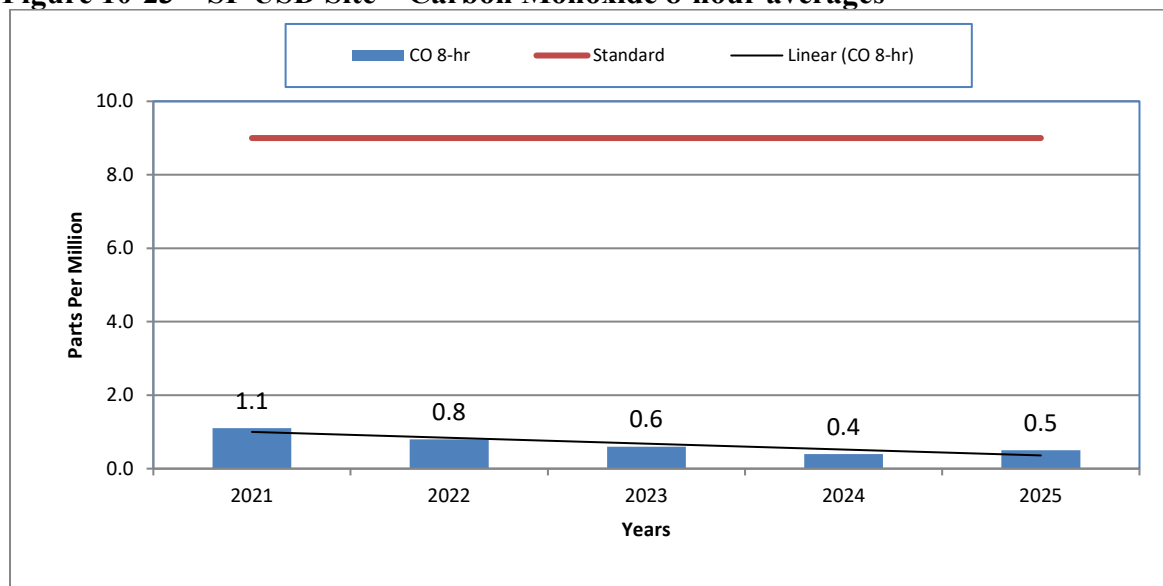

\*Only partial years of data for 2021, 2022, and 2023.

### 10.6 Aberdeen Bus Stop Site

In 2025, one sampling site was operated in the city of Aberdeen at the Bus Stop Site. The Fire Station #1 Site was established in 2000 as part of the implementation of the PM<sub>2.5</sub> air monitoring network. The parameters tested at the site included manual PM<sub>10</sub> and PM<sub>2.5</sub>. In 2020, the Fire Station #1 site was replaced by the Bus Stop site. The new site includes continuous PM<sub>10</sub> and PM<sub>2.5</sub>. The monitoring site is on the western side of the city. The area around the site has service type businesses and residential area around it. It is a couple blocks North of Highway 12. See Figure 10-24 for a picture of the monitoring site. In 2026, there are plans to replace the shelter at this site. It may be in a slightly different location.

**Figure 10-24 – Aberdeen’s Bus Stop Site**



Table 10-6 contains details on the monitoring site specific to the requirements in Title 40 of the Code of Federal Regulations Part 58.


**Table 10-6 – Aberdeen Bus Stop Site Specifics**

<b>Parameter</b>	<b>Information</b>
Site Name	Aberdeen Bus Stop
AQS ID Number	46-013-0004
Street Address	250 N 4th St, Aberdeen, SD 57401
Geographic Coordinates	UTM Zone 14, NAD 83, Lat 45.3468489 Long -98.494069
MSA	None
<b>PM<sub>10</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0798-122
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	High Concentration and Population
Sampling Method	Met One BAM 1020
Analysis Methods	Beta Attenuation
Data Use	SLAMS (Comparison to the NAAQS)
<b>PM<sub>2.5</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0308-170
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	High Concentration and Population
Sampling Method	Met One BAM 1020 w/PM <sub>2.5</sub> VSCC
Analysis Methods	Beta Attenuation
Data Use	SLAMS (Comparison to the NAAQS)

### 10.6.1 Aberdeen Bus Stop Site PM<sub>10</sub> Data

The Aberdeen Bus Stop site was opened in 2020 with a continuous monitor. The old fire station site ran manual monitors. The highest PM<sub>10</sub> annual average for the site was 23 micrograms per cubic meter in 2021 and the lowest PM<sub>10</sub> annual average 21 micrograms per cubic meter in 2022, 2023, and 2024 (See Figure 10-25). The trend for the first six years has been steady. This parameter is meeting the goals of high concentration and population and will be continued.


**Figure 10-25 – Aberdeen Bus Stop Site – PM<sub>10</sub> Annual Averages**

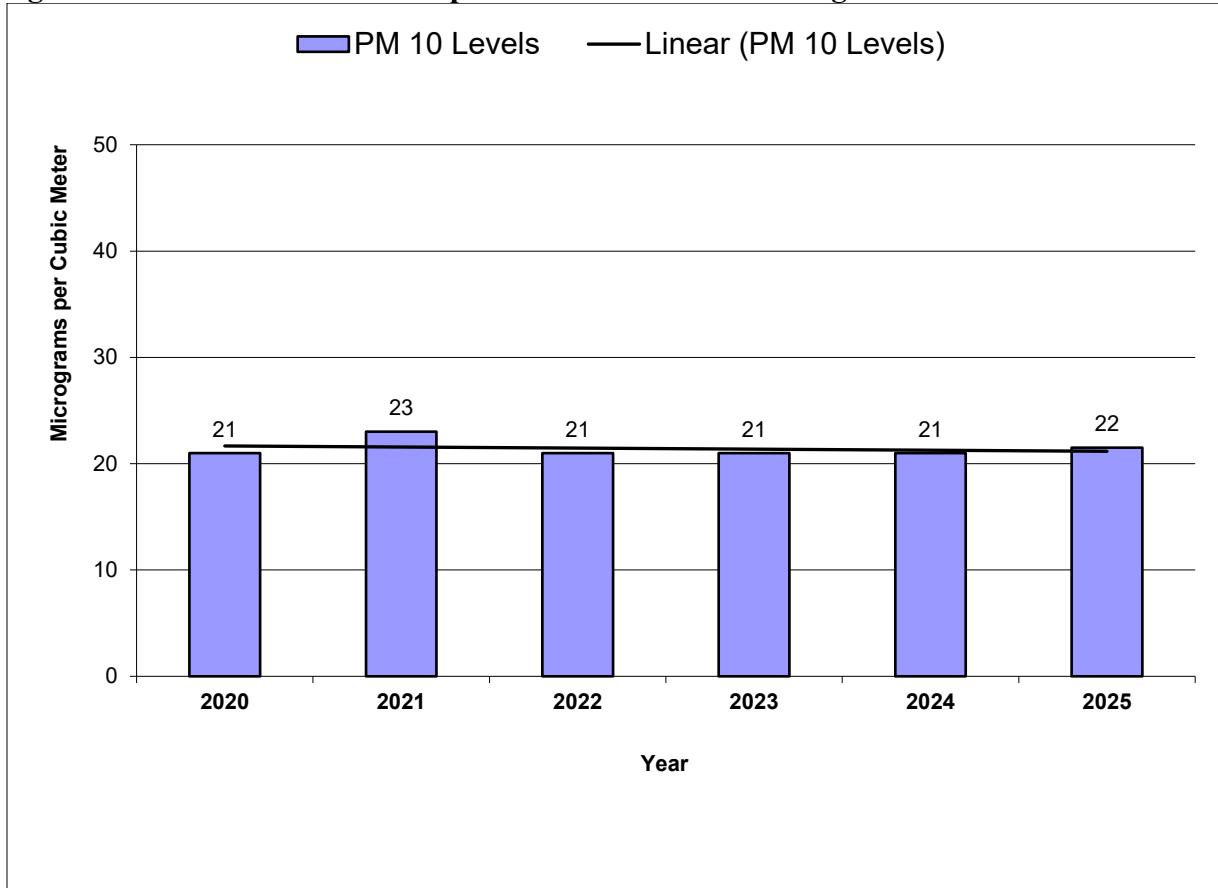

### 10.6.2 Aberdeen Bus Stop Site PM<sub>2.5</sub> Data

The Aberdeen Bus Stop site was opened in 2020 with a continuous monitor. The old fire station site ran manual monitors. The highest PM<sub>2.5</sub> annual average for the site was 7.0 micrograms per cubic meter in 2023 and the lowest was 4.2 micrograms per cubic meter in 2022 (See Figure 10-26). The trend for the first six years is steady. This parameter is meeting the goals of high concentration and population and will be continued.

**Figure 10-26 – Aberdeen Bus Stop Site – PM<sub>2.5</sub> Annual Averages**

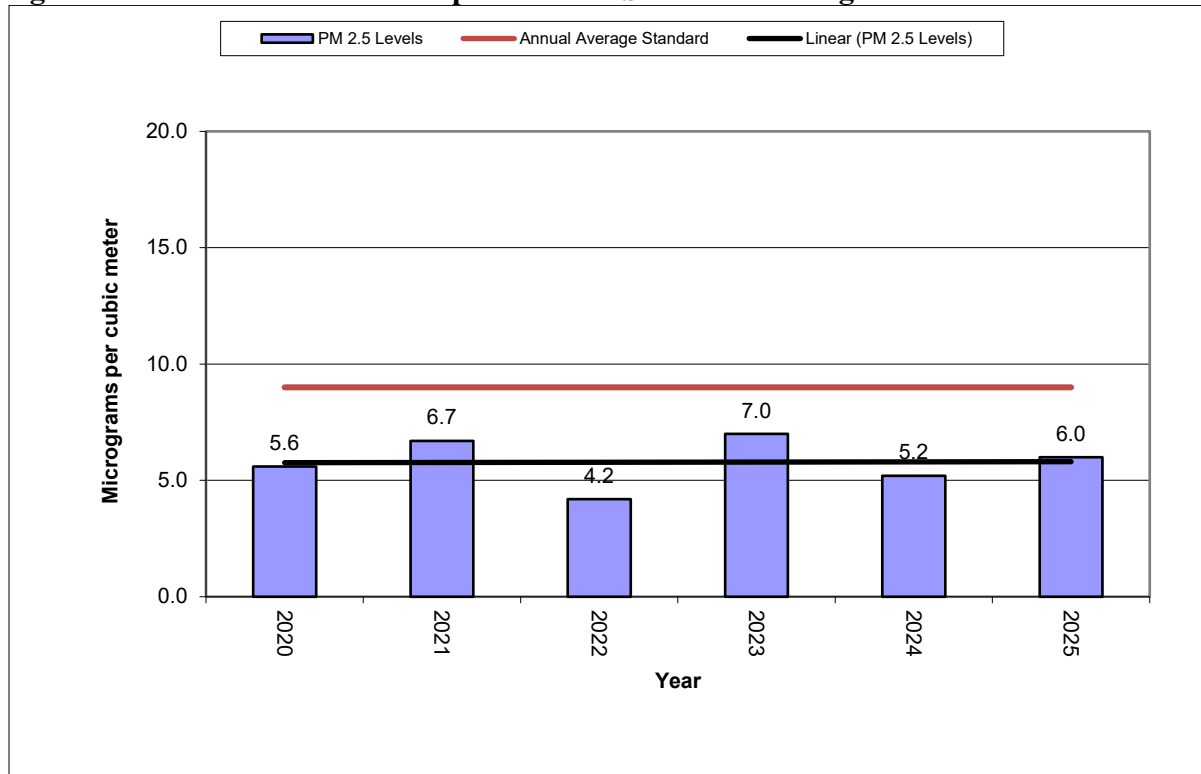

### 10.7 Brookings Research Farm Site

The Research Farm Site was setup in 2008 and is located at the Soil Conservation Farm northwest of the city of Brookings. An older site located at the City Hall building in the center of Brookings was discontinued at the end of 2014.

The Research Farm Site was set up in cooperation with the 3M Company in Brookings and Valero Renewable Fuels Company near the city of Aurora. The sampling for ozone was a requirement of the Prevention of Significant Deterioration permits for both facilities. The department operated the site and provided data to the facilities. The 3M Company completed their air monitoring report using the data for 2008. Valero Renewable Fuels Company decided not to complete the facility upgrade under its Prevention of Significant Deterioration permit and did not request any data from the Research Farm Site. Ozone data collected between 2008 and 2010 was added as a state and local air monitoring stations site to the National Database in 2010 and the site was continued, adding continuous PM<sub>10</sub> and PM<sub>2.5</sub> in 2015.

The initial goals of the monitoring site were the evaluation of impacts to the ozone concentrations from modification at the 3M Company and Valero Renewable Fuels Company. The current goals are to collect ozone data downwind of a small city for comparison to the National Ambient Air Quality Standards and determine particulate matter data for a rural area in eastern South Dakota. Figure 10-27 shows a current picture of the monitoring site.

**Figure 10-27 –Research Farm Site**



Table 10-7 contains details on the monitoring site specific to the requirements in Title 40 of the Code of Federal Regulations Part 58.

**Table 10-7 –Research Farm Site Specifics**


<b>Parameter</b>	<b>Information</b>
Site Name	Brookings Research Farm
AQS ID Number	46-011-0003
Street Address	3714 Western Ave.
Geographic Coordinates	UTM Zone 14, NAD 83, Lat 44.348321 Long -96.807254
MSA	None
<b>Ozone</b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQOA-0880-047
Operating Schedule	Hourly
Scale Representation	Regional
Monitoring Objective	High Concentration, Population, and Background
Sampling Method	Thermo 49i
Analysis Methods	Ultraviolet
Data Use	SLAMS (Comparison to the NAAQS)

Parameter	Information
<b>PM<sub>10</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0798-122
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	High Concentration and Population
Sampling Method	Met One BAM-1020
Analysis Methods	Beta Attenuation
Data Use	SLAMS (Comparison to the NAAQS) Real-Time Data
<b>PM<sub>2.5</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0308-170
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	Population and High Concentration
Sampling Method	Met One BAM-1020 w/PM <sub>2.5</sub> VSCC
Analysis Methods	Beta Attenuation
Data Use	SLAMS (Comparison to the NAAQS) Real-Time Data

**10.7.1 Research Farm Site PM<sub>10</sub> Data**

PM<sub>10</sub> sampling began at this site in 2015. The annual average for this site ranged from 15 micrograms per cubic meter in 2016 to 23 micrograms per cubic meter in 2023 and 2024. The annual average at the Brooking site has been increasing. Testing for this parameter is meeting the goals of high concentration and population. Figure 10-28 contains a graph of the annual averages since the site was setup.


**Figure 10-28 –Research Farm Site – PM<sub>10</sub> Annual Averages**

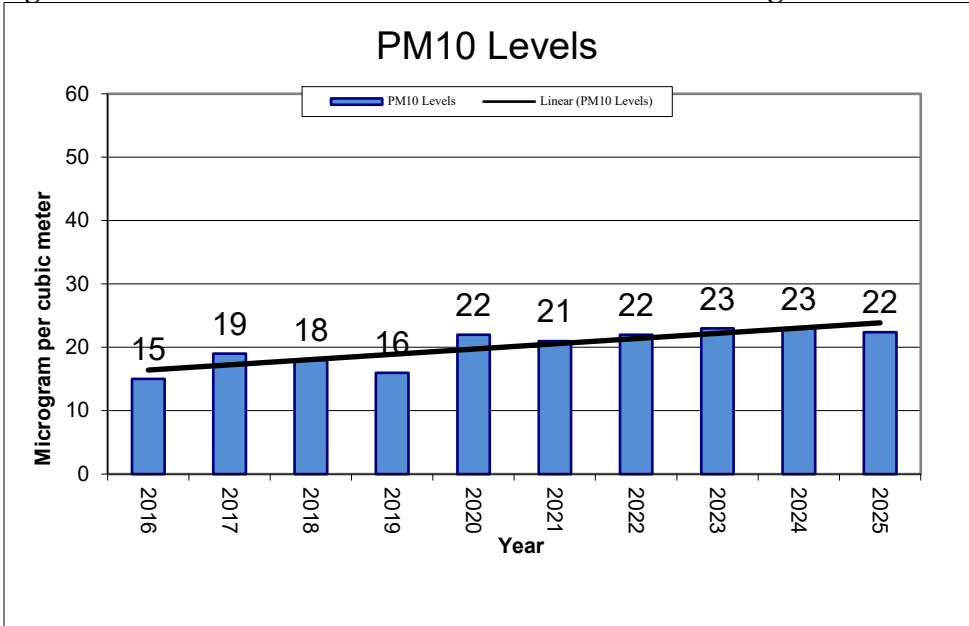

### 10.7.2 Research Farm Site PM<sub>2.5</sub> Data

PM<sub>2.5</sub> sampling began at this site in 2015. The annual average for this site ranged from 9.6 micrograms per cubic meter in 2025 to 3.7 micrograms per cubic meter in 2022. Annual averages are under the standard but have an increasing trend. It is believed that Canadian smoke affected the eastern side of the state in 2025. Testing for this parameter is meeting the goals of high concentration and population. Figure 10-29 contains a graph of the annual averages since the site was setup.

**Figure 10-29 –Research Farm Site – PM<sub>2.5</sub> Annual Averages**

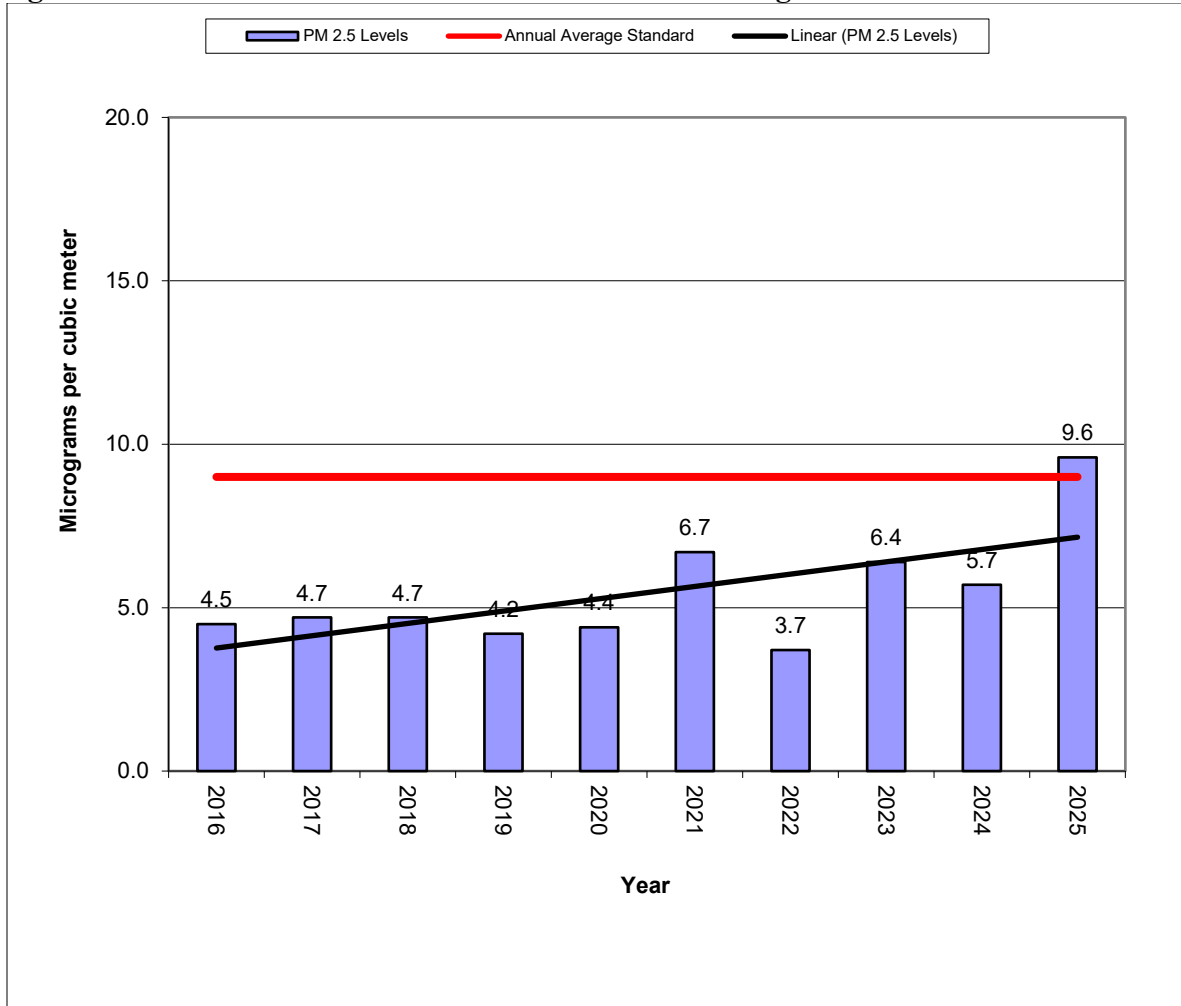


### 10.7.3 Research Farm Site Ozone Data

The 2025 sampling year is the 18th ozone season of testing. The highest fourth highest 8-hour average for this site was at 0.071 parts per million in 2019. The SD School Site was the highest ozone concentration site in the state since 2010. In 2019, the Brookings Research Farm had the highest readings. There was a noticeable increase in concentration and in the number of high concentrations. EPA concurred these readings were out of the ordinary. The department received a new ozone analyzer and put it at the Brookings site to do a side by side comparison toward the end of October 2019. The two analyzers tracked very well, but the new analyzer read 6-7 ppb lower. On October 30, 2019, the new analyzer was put into service and the Brookings' readings are more comparable to the other eastern sites. In 2020, an additional ozone analyzer was added in Watertown. This expanded the network along the entire eastern part of the state giving a better view of regional transport and another site to compare to the Brookings' readings. There continued to be moisture problems and a Nafion dryer was installed 7/27/22. The ozone data trend indicates a slightly increasing level.

The testing for this parameter is meeting the goals of high concentration and population and will be continued. The graph in Figure 10-30 shows the yearly 4<sup>th</sup> highest ozone concentration levels for the last 18 years.

**Figure 10-30 – Brookings Research Farm Site Ozone Yearly 4th Highest 8-Hour Averages**

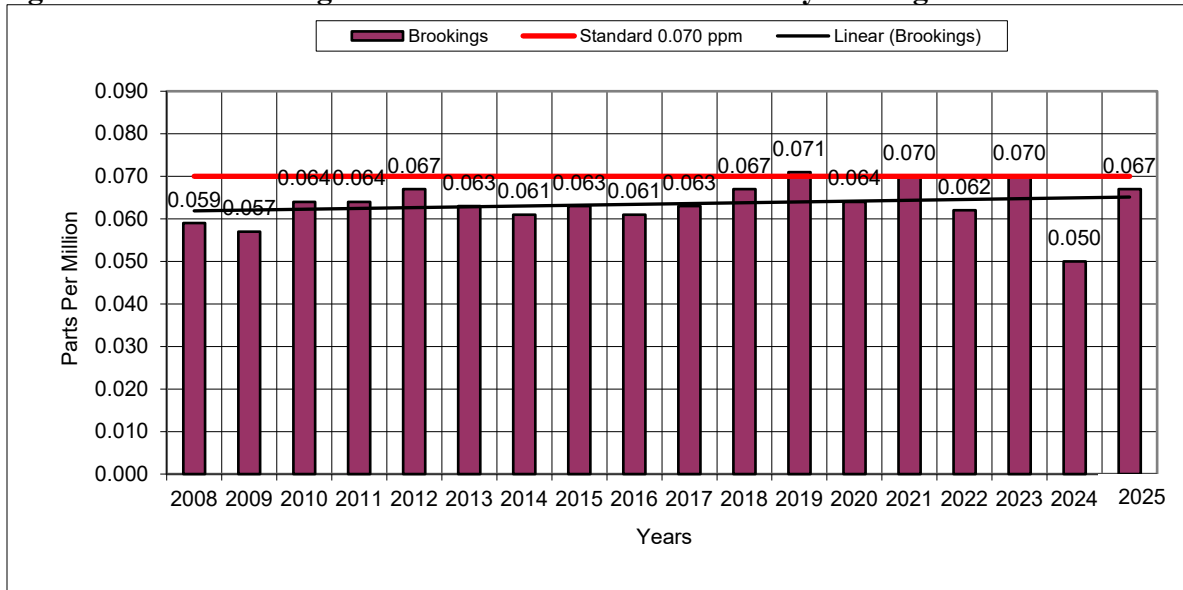

## 10.8 Watertown Site

In 2025, one sampling site was operated in the city of Watertown. Watertown is the fifth largest city in South Dakota. The city has an increasing growth rate and industrial base. The industrial base is a mixture of service-oriented business and light industry. One other air monitoring site was operated in Watertown starting in 1974 and closed 1987. Figure 10-31 shows a picture of the monitoring site.

**Figure 10-31 – Watertown Site**



The current Watertown Site was established in 2003 as part of the implementation of the PM<sub>2.5</sub> network. In 2012, the manual PM<sub>2.5</sub> monitors were replaced with a continuous monitor. Testing at the site includes the parameters of PM<sub>10</sub> and PM<sub>2.5</sub> at a sampling frequency of every day. An ozone analyzer was added to the site in 2020.

The monitoring site is in the western third of the city just east of an industrial park area. The site is located on city property in a monitoring shelter. The area around the site has service type businesses and light industry to the west and south. Residential areas are located to the north and east of the site. There have been no significant changes noted in buildings or trees around the site during this review. Table 10-8 contains details on the monitoring site specific to the requirements in Title 40 of the Code of Federal Regulations Part 58. In 2026, it is planned to move this site to a different location and put in a new shelter. The current property being considered is owned by the South Dakota National Guard.


**Table 10-8 – Watertown Site Specifics**

<b>Parameter</b>	<b>Information</b>
Site Name	Watertown
AQS ID Number	46-029-0002
Street Address	801 4 <sup>th</sup> Ave. SW, Watertown, SD
Geographic Coordinates	UTM Zone 14, NAD 83, Lat 44.897784 Long -97.128822
MSA	None
<b>PM<sub>10</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0798-122
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	High Concentration and Population
Sampling Method	Met One BAM-1020
Analysis Methods	Beta Attenuation
Data Use	SLAMS (Comparison to the NAAQS) Real-Time Data
<b>PM<sub>2.5</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0308-170
Operating Schedule	Hourly
Scale Representation	Regional
Monitoring Objective	Background, Transport
Sampling Method	Met One BAM-1020 w/PM <sub>2.5</sub> VSCC
Analysis Method	Beta Attenuation
Data Use	SLAMS (Comparison to the NAAQS) Real-time Data
<b>Ozone</b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQOA-0880-047
Operating Schedule	Hourly
Scale Representation	Neighborhood
Monitoring Objective	High Concentration, Population, and Background
Sampling Method	Thermo 49iQ
Analysis Methods	Ultraviolet
Data Use	SLAMS (Comparison to the NAAQS)

### **10.8.1 Watertown Site PM<sub>10</sub> Data**

The PM<sub>10</sub> monitor operated on an every third day sampling schedule until 2006 when a continuous PM<sub>10</sub> monitor replaced the manual monitors and an everyday sampling schedule began. The highest recorded annual average for PM<sub>10</sub> concentrations was 28 micrograms per cubic meter recorded in 2003 and 2021. The lowest annual average concentration of 20 micrograms per cubic meter was recorded in 2005, 2011, 2013, 2014, 2015, and 2019. The annual average indicates concentration levels are slightly increasing during the 23 years of testing. The PM<sub>10</sub> concentration can get close to and has exceeded the 24-hour standard. Testing for this parameter is meeting the goals of high concentration and population and will be continued. Figure 10-32 contains a graph of the annual averages.


**Figure 10-32 – Watertown Site – PM<sub>10</sub> Annual Averages**

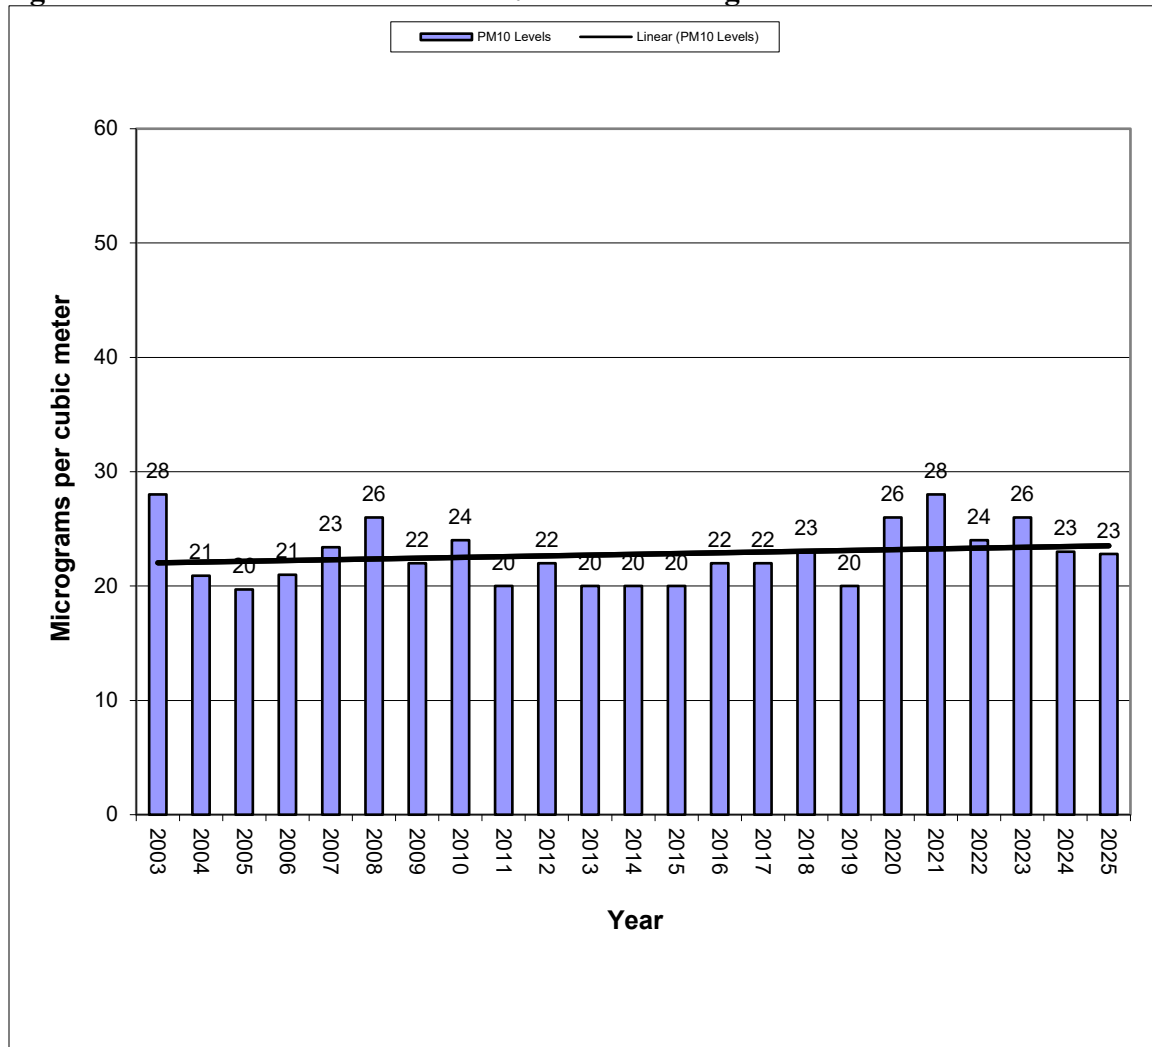

**10.8.2 Watertown Site PM<sub>2.5</sub> Data**

The PM<sub>2.5</sub> monitors were run on an every third day schedule since the PM<sub>2.5</sub> monitors were setup in 2003. Beginning in 2012, a continuous monitor was installed, and the site reported hourly concentrations on an everyday schedule. Annual averages for the Watertown Site range from a high of 11.0 micrograms per cubic meter in 2012 to a low of 4.5 micrograms per cubic meter in 2014. The annual average shows a decrease in PM<sub>2.5</sub> concentration levels over the 23 years of testing. Testing for this parameter is meeting the goals of high concentration and population and will be continued. Figure 10-33 contains a graph showing the annual average concentration for each year of operation.


**Figure 10-33 – Watertown Site PM<sub>2.5</sub> Annual Averages**

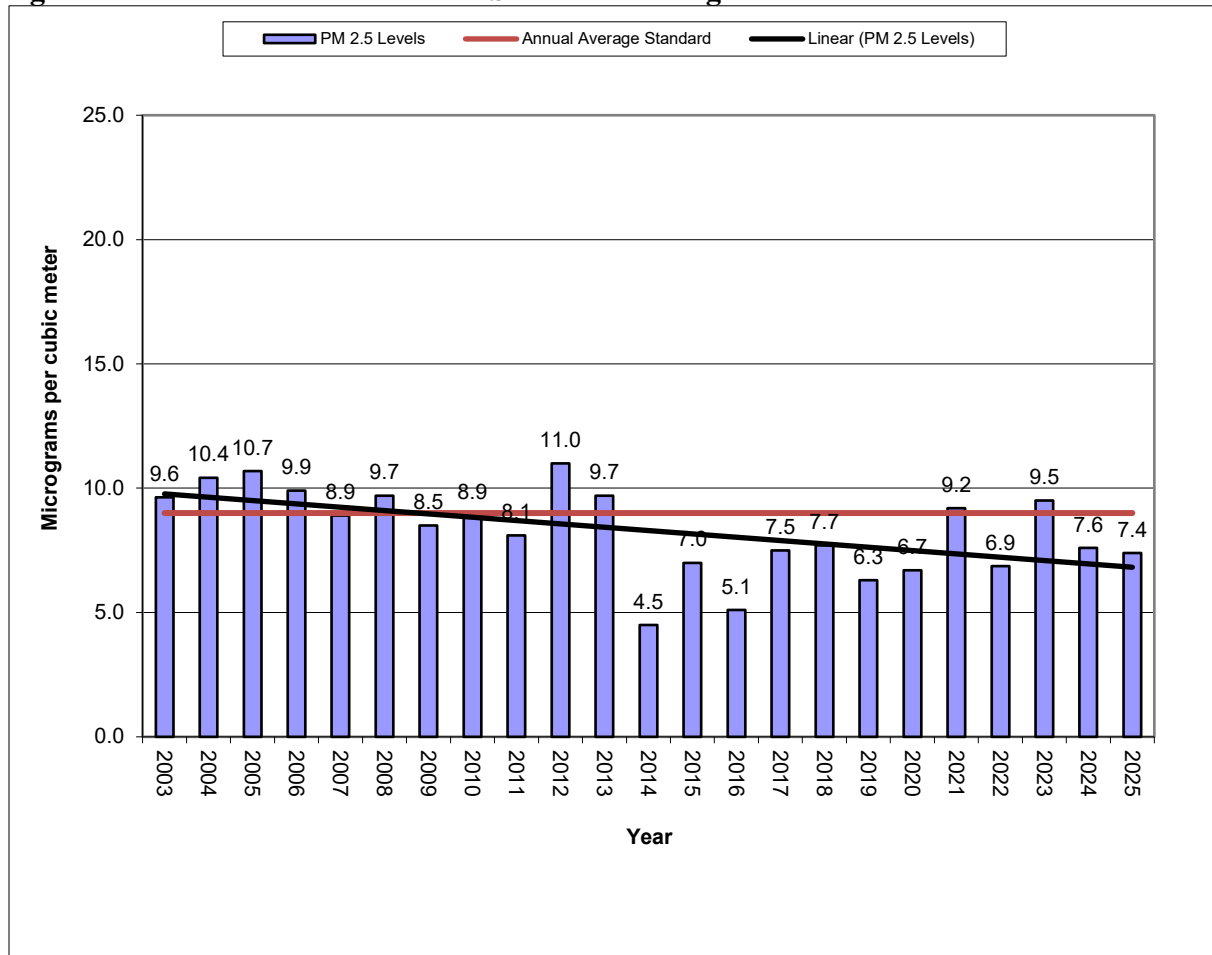

### **10.8.3 Watertown Site Ozone Data**

In 2020, an ozone analyzer was added in Watertown. This expanded the network along the entire eastern part of the state giving a better view of regional transport and another site to compare to the Brookings’ readings. The fourth highest 8-hour average for this site ranged from a high of 0.072 parts per million in 2023 to a low of 0.049 parts per million in 2024 (See Figure 10-34). The testing for this parameter is meeting the goals of high concentration, population, and background and will be continued.

**Figure 10-34 – Watertown Site Ozone Yearly 4th Highest 8-Hour Averages**

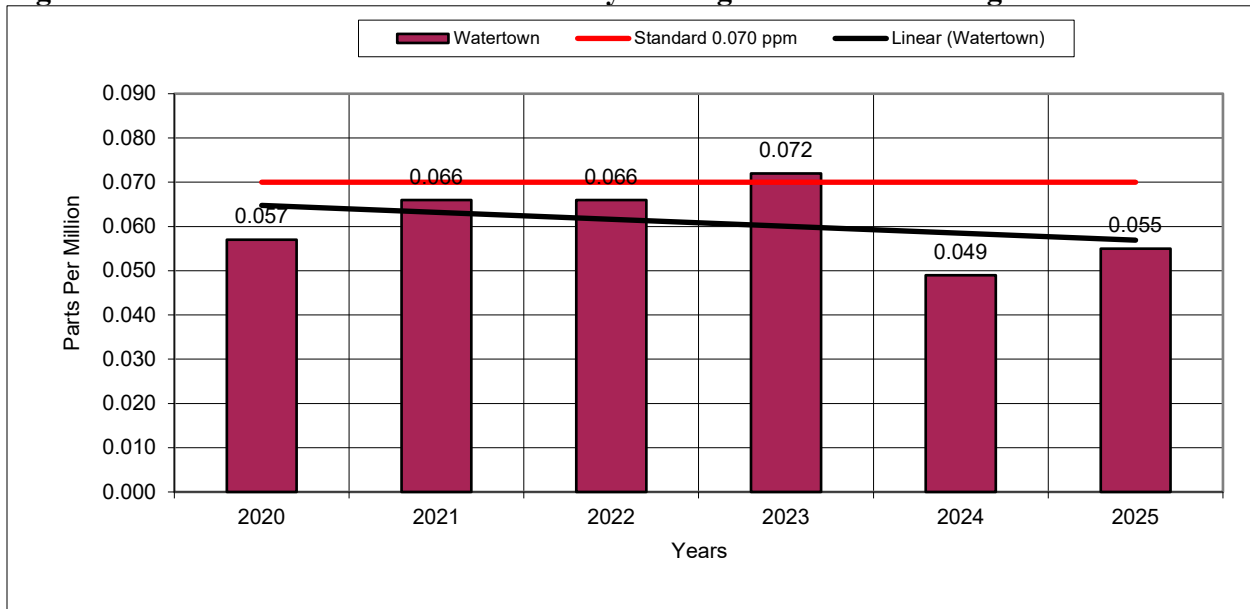

### 10.9 Vermillion Site

The UC #1 Site was located about 4 1/2 miles north of Elk Point. Sampling began just before January 1, 2009. The goals for the site were background and for comparison to the National Ambient Air Quality Standards. Union County is part of the Sioux City metropolitan statistical area (MSA) and due to the population of this MSA and the most recent ozone design value, at least one ozone monitor is required to be sited at the location of the expected maximum ozone concentration for the MSA. Although four of the five counties comprising the MSA are within Iowa or Nebraska, neither of these states were operating any SLAMS ozone monitors in those counties. As a result, the CFR required regulatory ozone monitoring of the Sioux City MSA in South Dakota as well. The landowner did not want to continue the contract at the site and the site was closed after the third quarter of 2021. While searching for a replacement site for UC#1, state-owned property in Vermillion, South Dakota was located, and staff subsequently submitted a modification request to relocate the UC#1 site to Vermillion. Although Vermillion is in Clay County, not Union County, Region 8 staff believed it was unlikely that the location of the maximum ozone concentration site for the Sioux City MSA is in Union County. Instead, they believe the maximum ozone concentration site is likely to the north of Sioux City in Iowa. Therefore, Region 8 approved this relocation request because the Vermillion site is expected to provide similar ozone data as the UC#1 site, is only ten miles up the Missouri River Valley from the UC#1 site, is on state-owned land and is in a more populated area than the previous site. Since then, Iowa has added a site in the northwestern corner of the state.

The new Vermillion site is located in the Northeast part of Vermillion at the old DOT shop. Figure 10-35 provides a picture of the monitoring site looking to the North. Table 10-9 contains details on the monitoring site specific to the requirements in Title 40 of the Code of Federal Regulations Part 58.

**Figure 10-35 – Vermillion Site**



**Table 10-9 – Vermillion Site Specifics**


Parameter	Information
Site Name	Vermillion DOT
AQS ID Number	46-027-0001
Street Address	1005 N Crawford Road
Geographic Coordinates	UTM Zone 14, NAD 83, Lat 42.789399 Long -96.903690
MSA	Sioux City, IA-NE-SD
<b>PM<sub>2.5</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0308-170
Operating Schedule	Hourly
Scale Representation	Regional
Monitoring Objective	Background, Transport
Sampling Method	Met One BAM-1020 w/PM <sub>2.5</sub> VSCC
Analysis Method	Beta Attenuation
Data Use	Real-time Data and SLAMS (Comparison to the NAAQS)

Parameter	Information
<b>Ozone</b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQOA-0992-087
Operating Schedule	Hourly
Scale Representation	Regional
Monitoring Objective	Background, Transport
Sampling Method	Teledyne T400
Analysis Method	Ultraviolet
Data Use	Real-time Data and SLAMS (Comparison to the NAAQS)

### 10.9.1 Vermillion Site PM<sub>2.5</sub> Data

The first year of monitoring at the Vermillion site was 2022. The highest annual average PM<sub>2.5</sub> concentration at this site was 8.7 micrograms per cubic meter in 2023 and the lowest annual average PM<sub>2.5</sub> concentration was 4.8 micrograms per cubic meter in 2025 (See Figure 10-36). Testing for this parameter has met the goal and will continue.


**Figure 10-36 – Vermillion Site PM<sub>2.5</sub> Annual Averages**

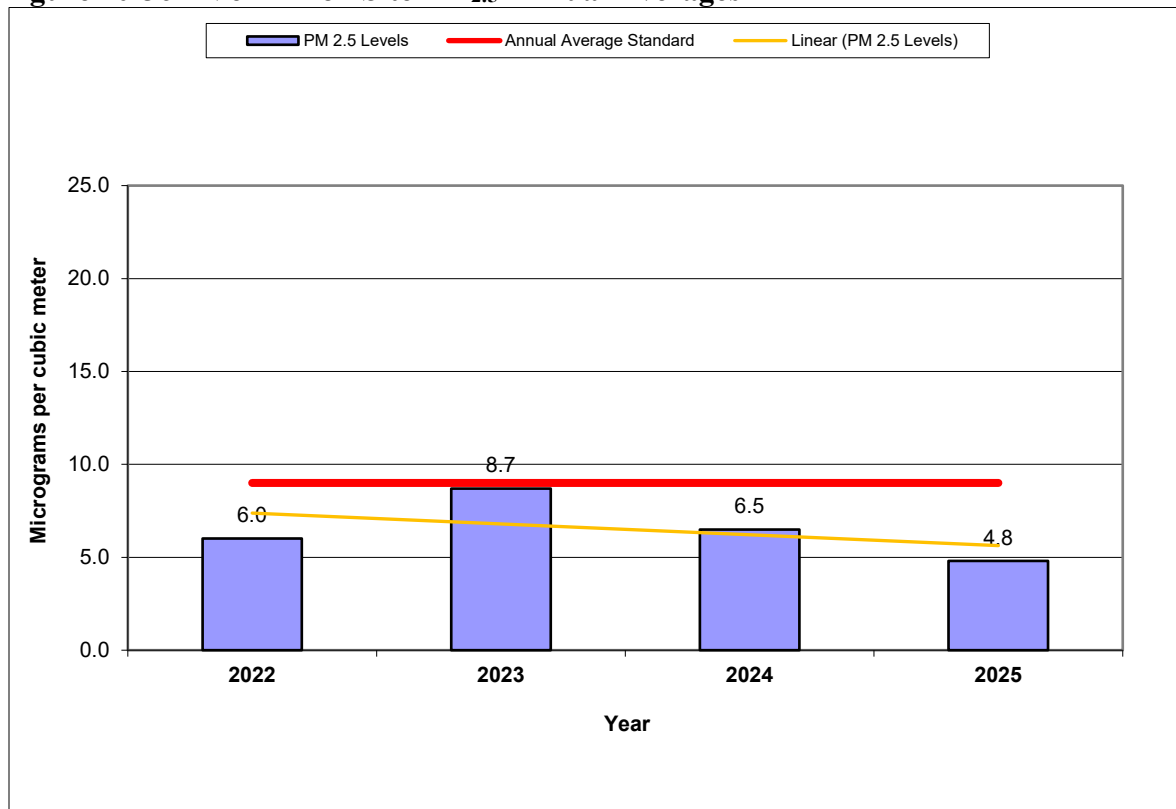

### 10.9.2 Vermillion Site Ozone Data

The first year of monitoring at the Vermillion site was 2022. The highest 8-hour average for this site was 0.074 parts per million in 2023 and the lowest 8-hour average was 0.057 parts per million in 2025 (See Figure 10-37). Testing for this parameter has met the goal and will continue.

**Figure 10-37 – Vermillion Site Ozone Yearly 4th Highest 8-Hour Averages**

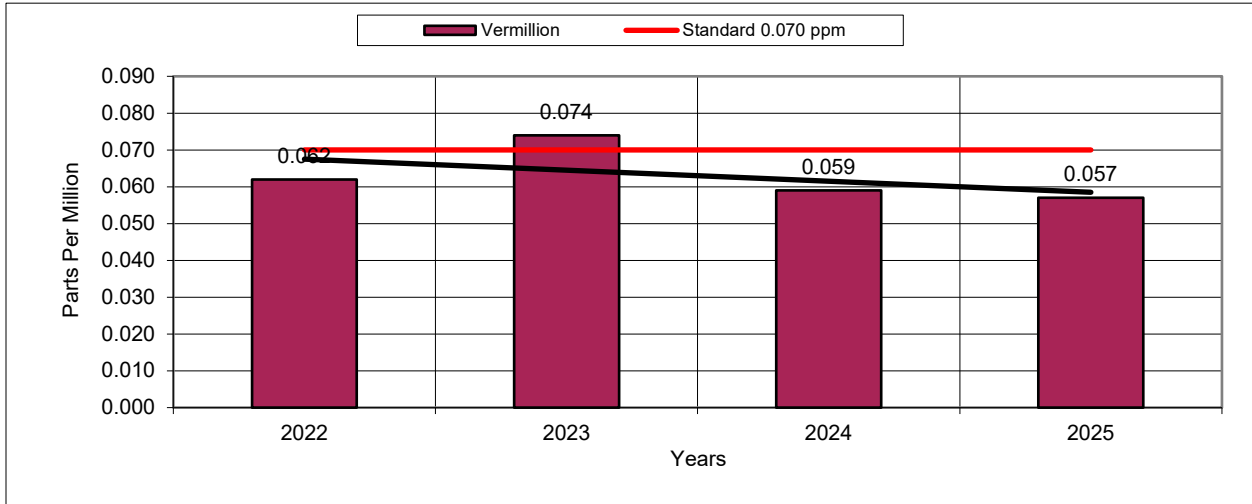

### 10.10 Pierre Airport Site

Pierre is the capital city of South Dakota. It is in the center of the state along the rough river bluffs overlooking the Missouri River. It is the 8<sup>th</sup> largest city in the state. Pierre has a relatively dry, four-season climate with long, dry, cold winters, hot summers and brief spring and autumn transitions.

At the beginning of 2015, a new monitoring site was set up in Pierre. The site is located at the Pierre Regional Airport Industrial Park in northeast Pierre. The sampling goal for the new site was to test a new area of the state with no past PM<sub>2.5</sub> monitoring. Figure 10-38 provides a picture of the monitoring site looking to the North. Table 10-10 contains details on the monitoring site specific to the requirements in Title 40 of the Code of Federal Regulations Part 58.

**Figure 10-38 – Pierre Airport Site**




**Table 10-10 – Pierre Airport Site Specifics**

<b>Parameter</b>	<b>Information</b>
Site Name	Pierre Airport
AQS ID Number	46-065-0003
Street Address	4293 Airport Road
Geographic Coordinates	UTM Zone 14, NAD 83, Lat 44.373794 Long -100.287355
<b>MSA</b>	None
<b>PM<sub>2.5</sub></b>	<b>(Continuous)</b>
Sampler Type	Federal Equivalent Method EQPM-0308-170
Operating Schedule	Hourly
Scale Representation	Regional
Monitoring Objective	Background, Transport
Sampling Method	Met One BAM-1020 w/PM <sub>2.5</sub> VSCC
Analysis Method	Beta Attenuation
Data Use	Real-time Data and SLAMS (Comparison to the NAAQS)

### 10.10.1 Pierre Airport Site – PM<sub>2.5</sub> Data

2025 was the 11th year of monitoring at the Pierre Airport Site. The annual PM<sub>2.5</sub> concentration at the site ranged from a high of 5.1 micrograms per cubic meter in 2023 to 1.9 micrograms per cubic meter in 2022. The Pierre Airport Site shows relatively low concentrations, like those at the two National Parks sites. See Figure 10-39 to view a graph of the annual averages. Testing for this parameter is meeting the goals and will be continued.

**Figure 10-39 – Pierre Airport Site – Annual PM<sub>2.5</sub> Concentrations**

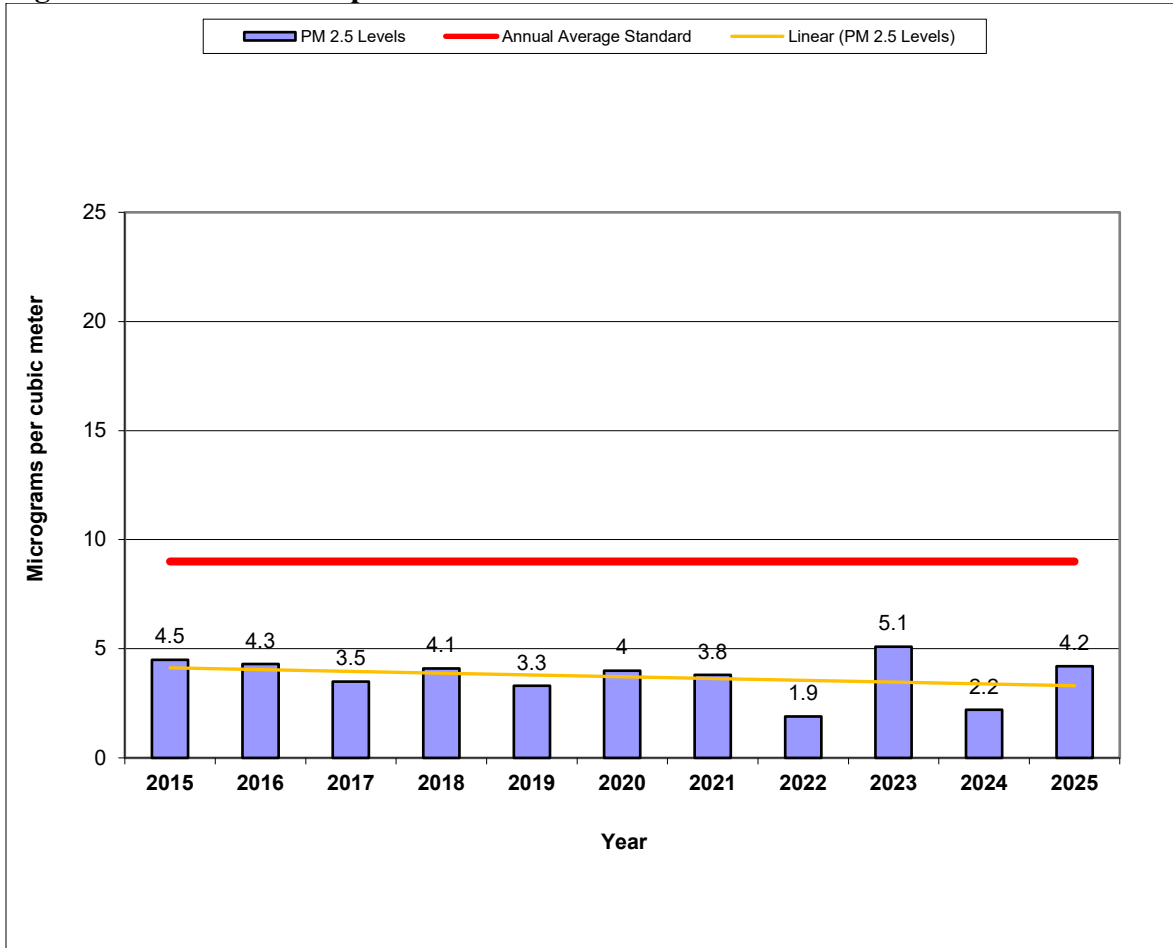

## 11.0 SPECIAL AIR QUALITY MONITORING

### 11.1 PM<sub>2.5</sub> Speciation Network

The PM<sub>2.5</sub> Speciation Network quantifies mass concentrations and significant PM<sub>2.5</sub> constituents which include trace elements, sulfate, nitrate, sodium, potassium, ammonium, and carbon. This series of analytes is very similar to those measured within the Interagency Monitoring of Protected Visual Environments program.

Physical and chemical speciation data are anticipated to provide valuable information for:

1. Assessing trends in mass component concentrations and related emissions, including specific source categories;
2. Characterizing annual and seasonal spatial variation of aerosols;
3. Determining the effectiveness of implementation control strategies;
4. Helping to implement the PM<sub>2.5</sub> standard by using speciated data as input to air quality modeling analyses;
5. Aiding the interpretation of health studies by linking effects to PM<sub>2.5</sub> constituents; and
6. Understanding the effects of atmospheric constituents on visibility impairment and regional haze.

South Dakota has one site that collects samples as part of the PM<sub>2.5</sub> Speciation Network. This site is located at the SF USD Site and collects 24-hour air samples on a 3-day schedule. The PM<sub>2.5</sub> speciation monitor was moved from the KELO site to the SD School Site at the beginning of 2009. It was moved again in early 2021 to the new SF USD site. The SF USD Site is located on the northwest part of the city. The site is just west of I-29. The predominant wind direction is northwest for most of the year with southeast winds during the summer months. Carbon samples were originally taken by the Met One SASS monitor. In September 2009, the Interagency Monitoring of Protected Visual Environments URG 3000N sampler was set up to do the carbon sampling. In November 2016, EPA Region 8 gave the department a Met One Super SASS monitor to replace the existing monitor. The speciation monitoring was moved to the new SF USD site in 2021.

At the beginning of 2016, a new lab was contracted to analyze and enter the data into EPA's Air Quality System. There is a lag in data entry and all the 2025 data has not yet been entered at the time this annual report was written. Graphs will be added back into the report once three complete years of data have been collected.

## 12.0 CONCLUSIONS

All areas in the state are in attainment of the federal National Ambient Air Quality Standards. All sites meet the requirements of Title 40 of the Code of Federal Regulation, Part 58, Appendix A, C, D, and E.

The ambient air quality monitoring network is continually reviewed to ensure that there is adequate coverage of populated areas in the state as well as rural areas. As the state's population and industry changes, monitoring sites will be added or moved to new locations.

Major modifications to the sampling network include:

1. Continue replacing older continuous monitors before they become too expensive to repair and as resources allow;
2. Switch out old Thermo monitors to new Teledyne monitors;
3. Putting in new shelters at Watertown and Aberdeen;
4. Continue adding stairs at some of the sites including Watertown and Aberdeen; and
5. Replace Mesa Labs manual monitors at Sioux Falls NCore site with new MET One E-FRM-DC manual monitors.

Equipment Purchase Priorities include the following items:

1. Continue to replace equipment as needed to maintain the National Core site;
2. Purchase new equipment as required to meet EPA requirements.
3. Putting in new shelters at some of the sites; and
4. Adding stairs at some of the sites;

There is an ongoing effort to maintain staff training regarding the latest monitoring techniques and procedures to perform these studies. It is anticipated that the ambient air monitoring network will operate in much the same manner as it has in the past. This will include the identification of pollution problems, measurement and evaluation of the extent of the problem, and determination of action to be taken to protect the environment and the health of the people of South Dakota.

There currently have been hints of reduced federal and state funding. Budget reductions in the future may cause a need to re-evaluate some of the monitoring sites.


## 13.0 REFERENCES

1. Quality Assurance Handbook for Air Pollution Measurement Systems, Volume II, Ambient Air Monitoring Program, EPA-54/B-17-001, January 2017, located at <https://www3.epa.gov/ttn/amtic/files/ambient/pm25/qa/Final%20Handbook%20Document%2017.pdf>;
2. Title 40, Code of Federal Regulation, Part 50, located at <https://www.ecfr.gov/cgi-bin/text-idx?SID=52f340d421aa94fe820d7ba0d1eb1e28&mc=true&node=pt40.2.50&rgn=div5>;
3. Title 40, Code of Federal Regulation, Part 58, located at <https://www.ecfr.gov/cgi-bin/text-idx?SID=eb02812221844f2f21472cc2dd32fc0e&mc=true&node=pt40.6.58&rgn=div5>; and
4. SLAMS/NAMS/PAMS Network Review Guidance, EPA-454/R-98-003, March 1998, located at <https://www3.epa.gov/ttn/amtic/files/ambient/criteria/netrev98.pdf>.

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-1 – AirNow Map for 05/31/25

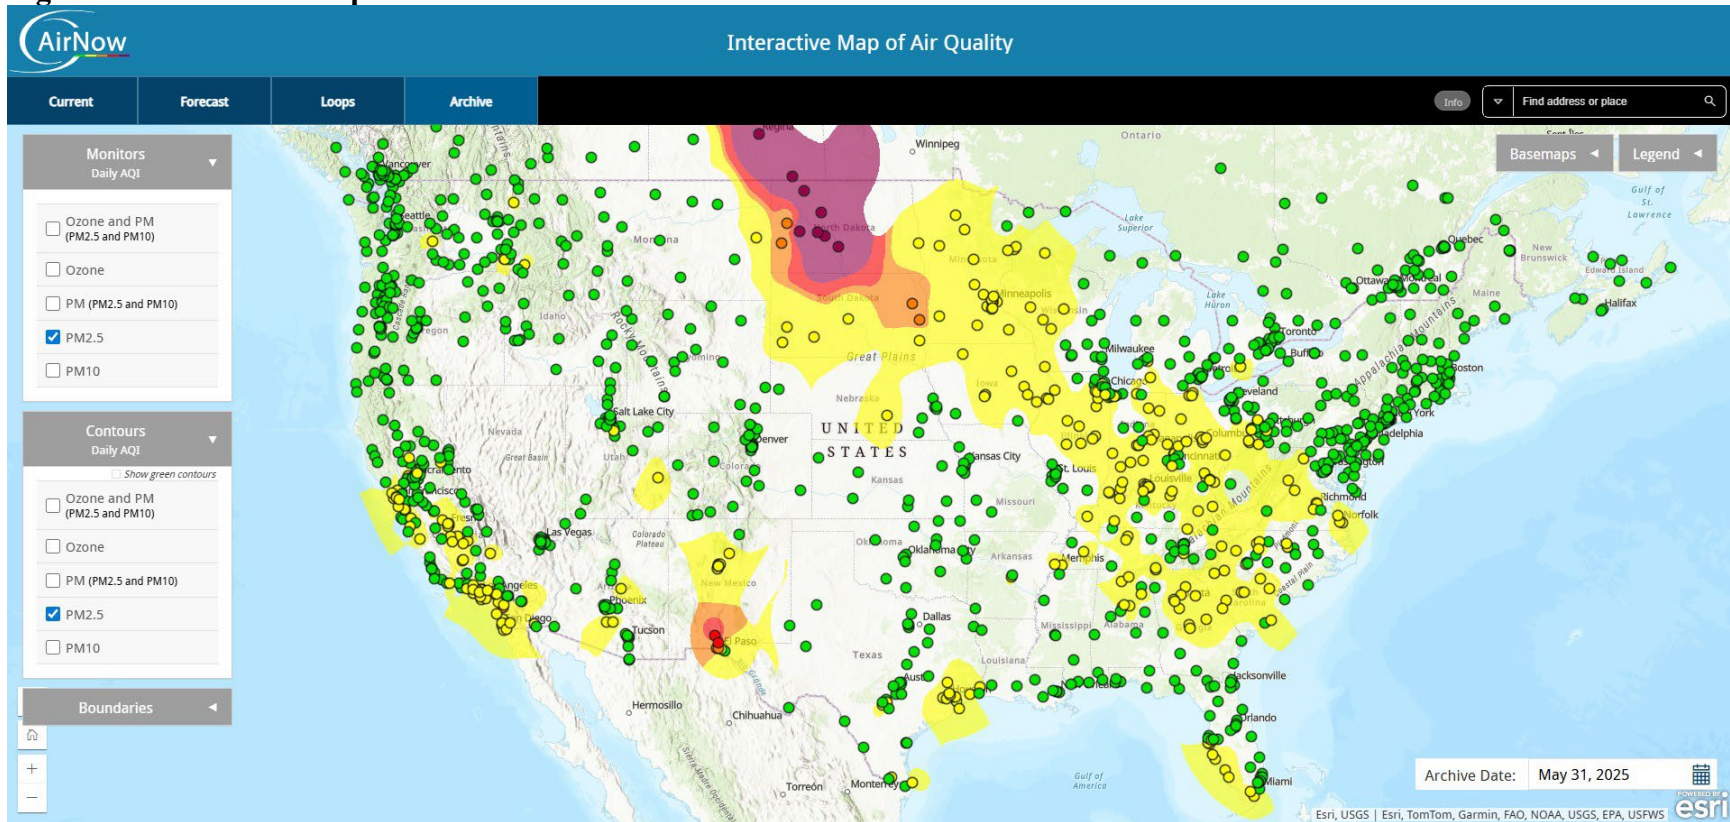

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-2 – AirNow Tech Map for 05/31/25

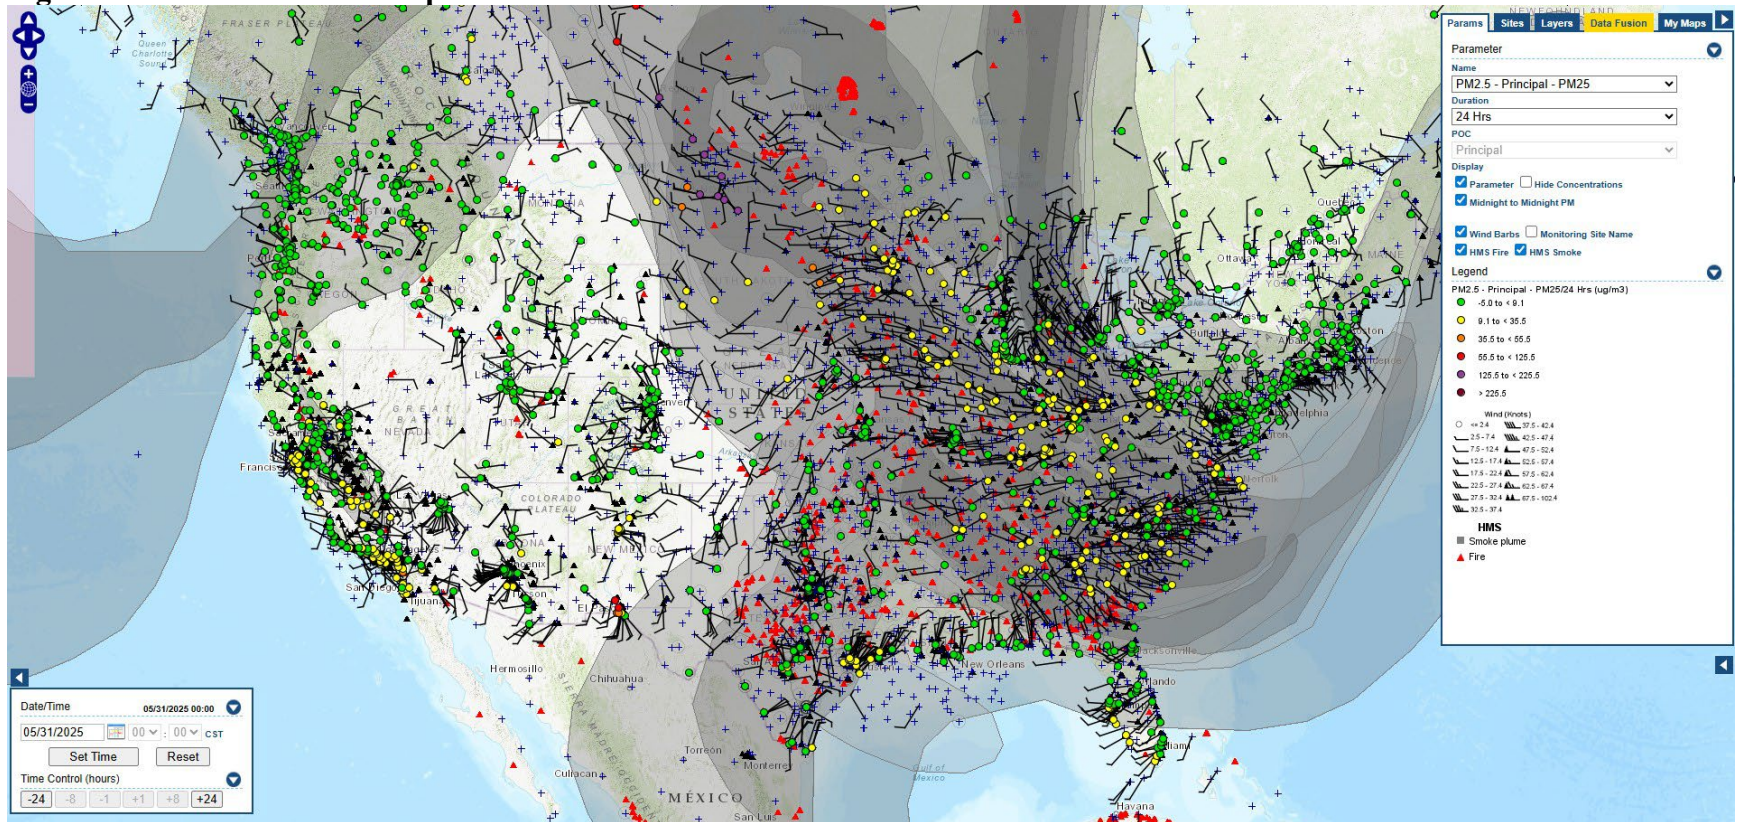

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-3 – AirNow Map for 06/01/25

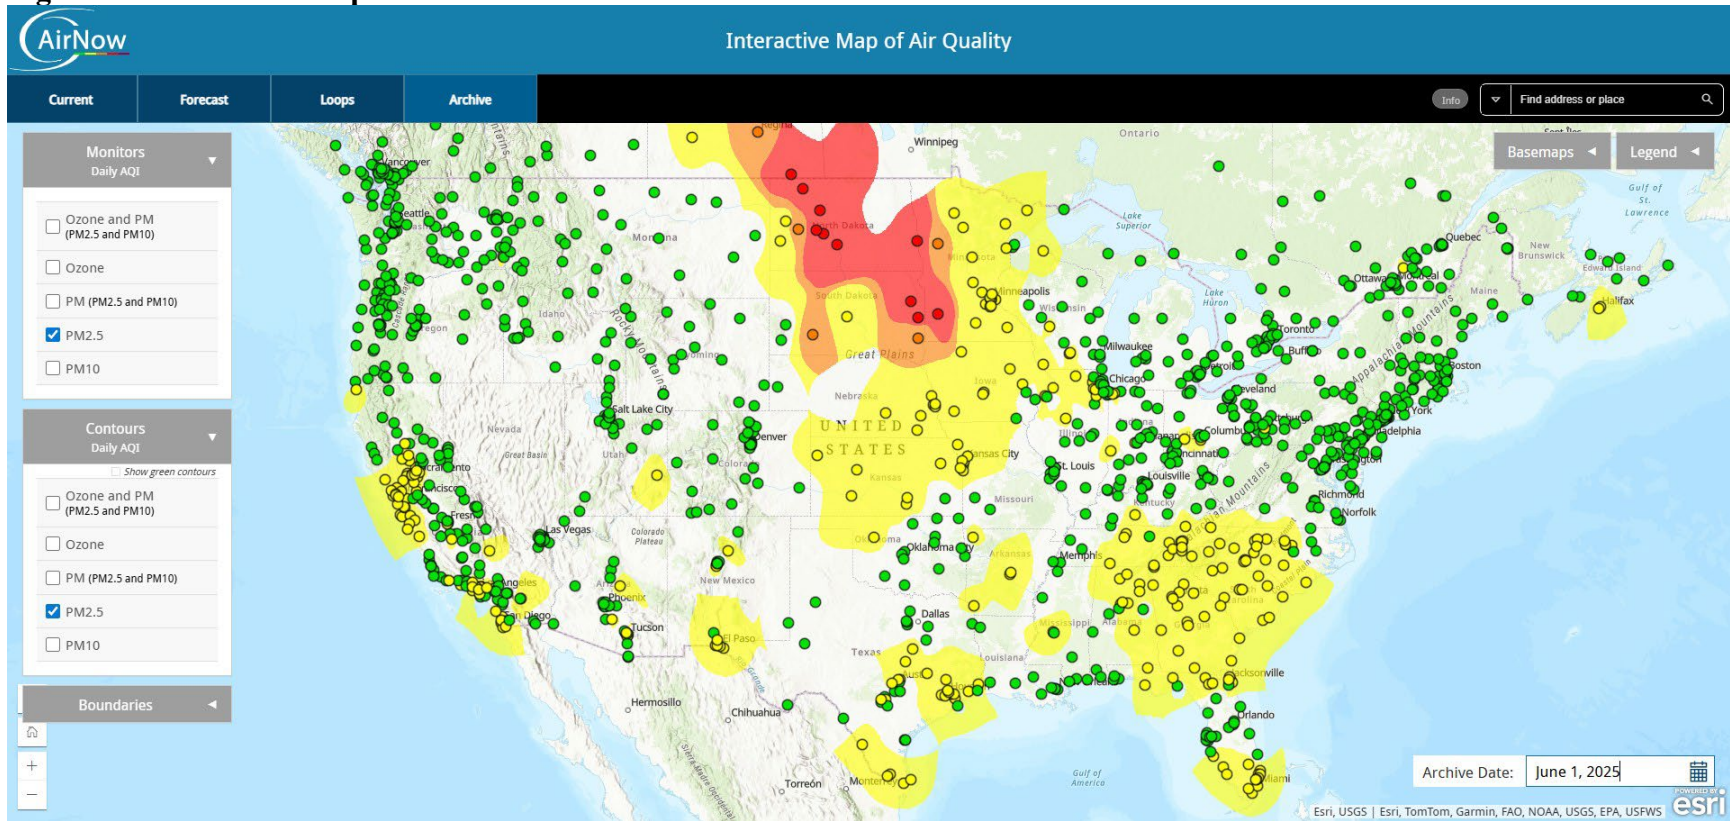

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-4 – AirNow Tech Map for 06/01/25

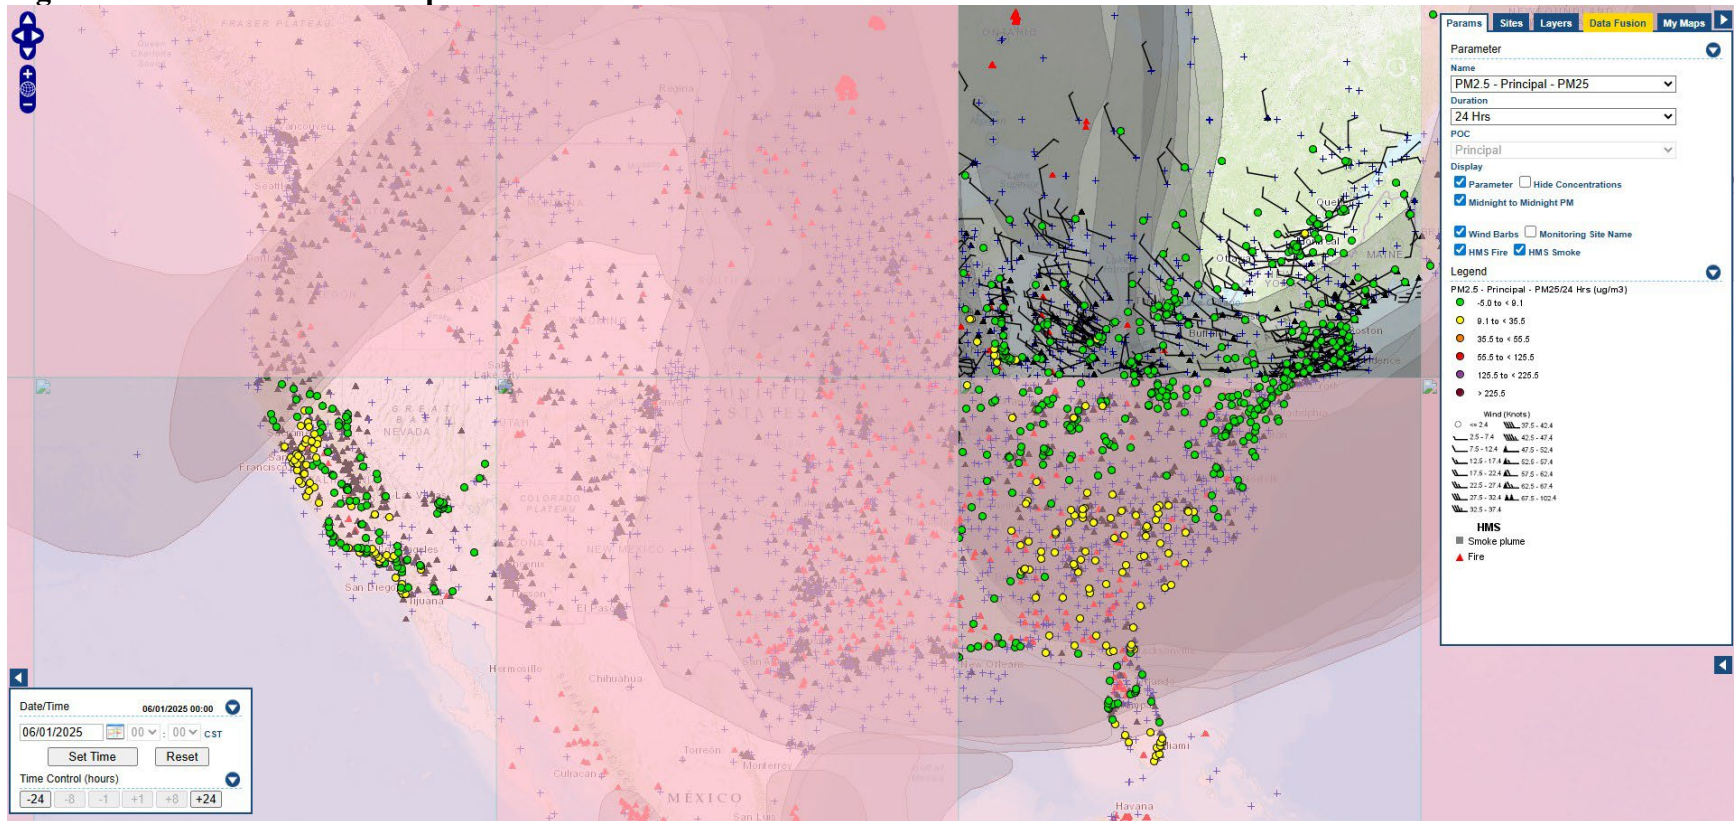

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-5 – AirNow Map for 06/12/25

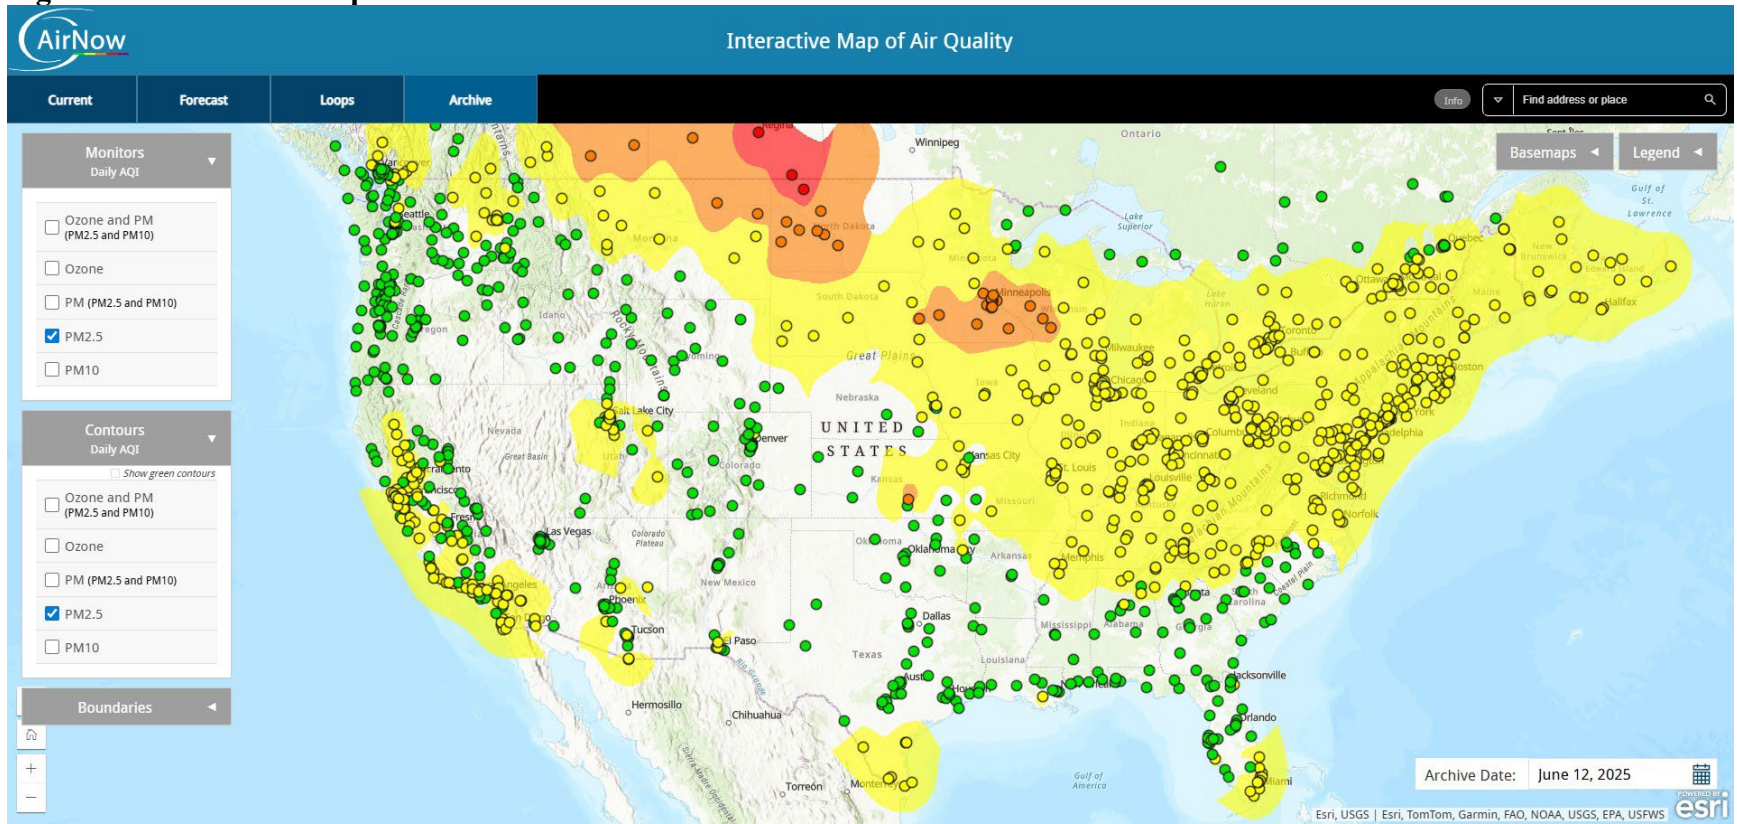

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-6 – AirNow Tech Map for 06/12/25

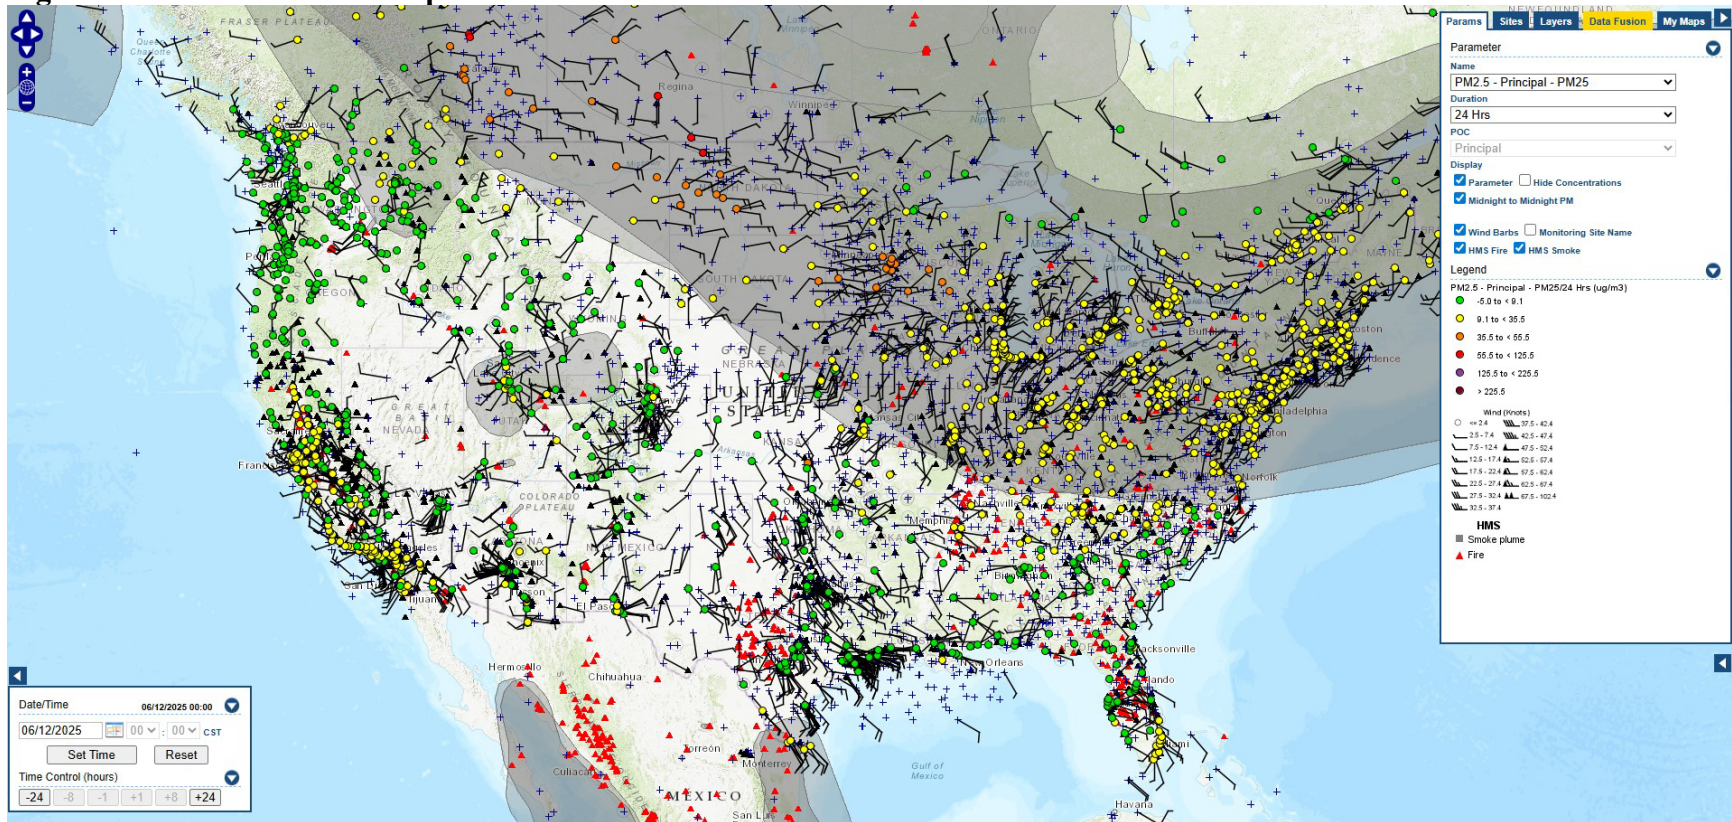

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-7 – AirNow Map for 07/12/25

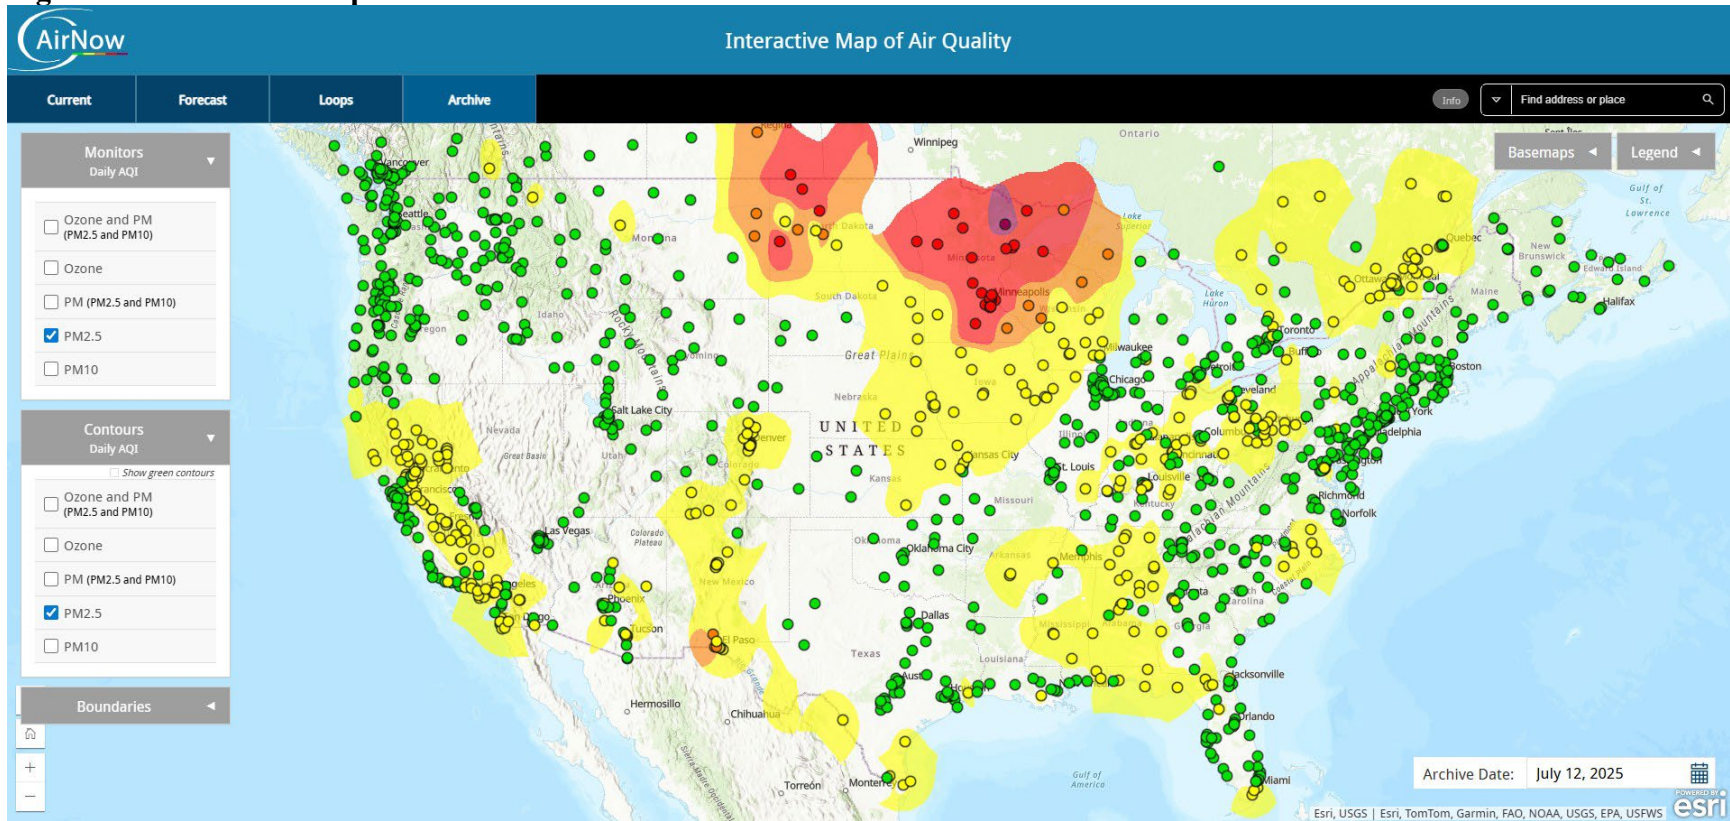

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-8 – AirNow Tech Map for 07/12/25

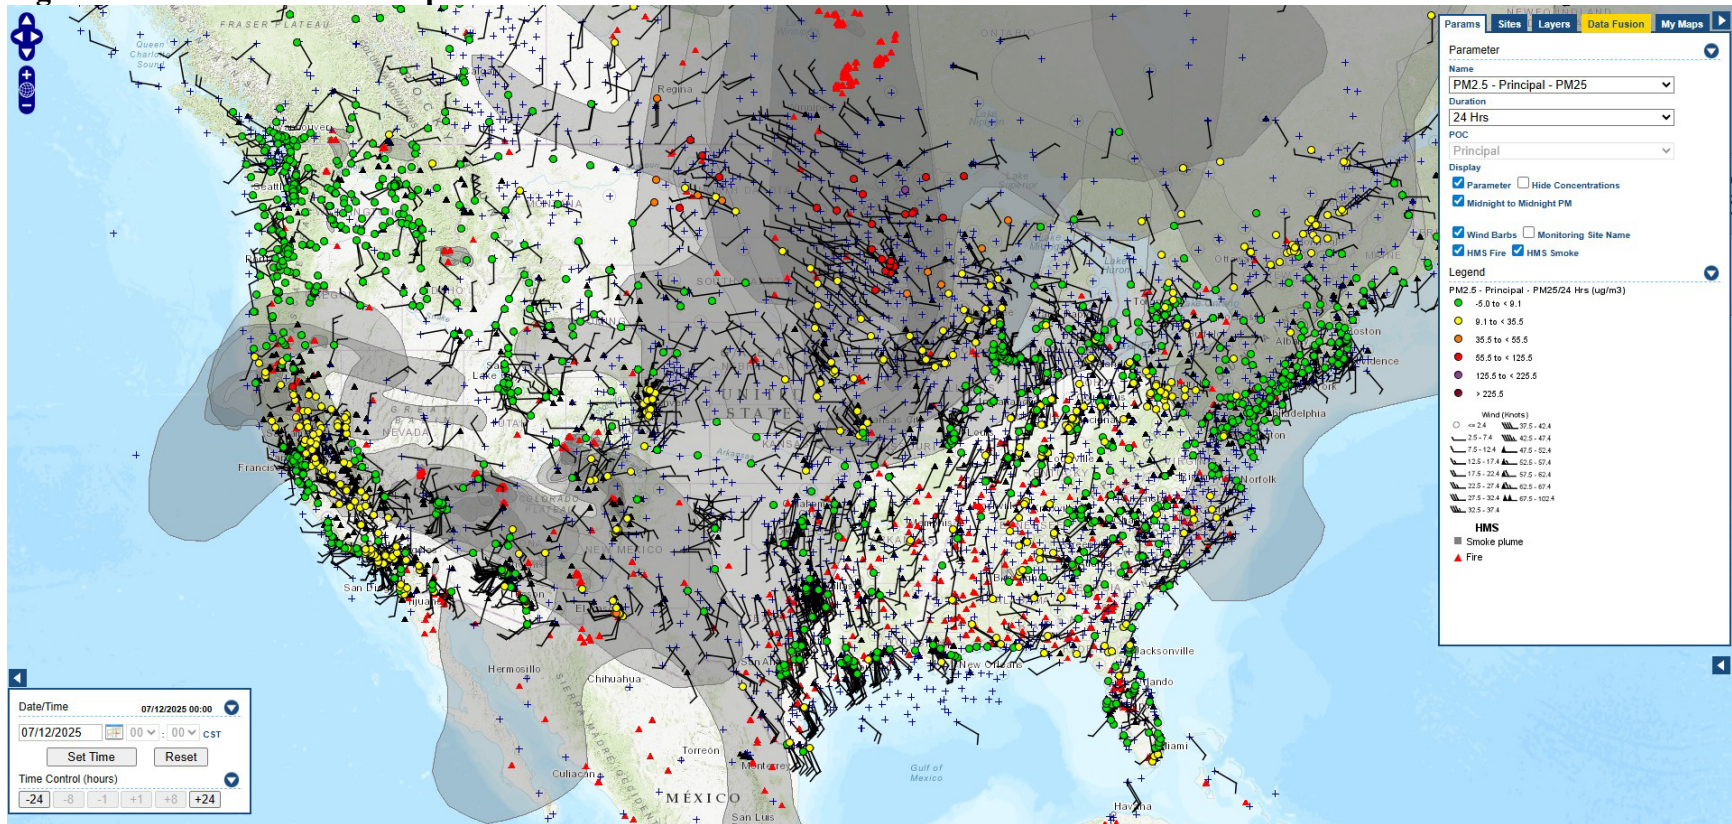

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-9 – AirNow Map for 07/30/25

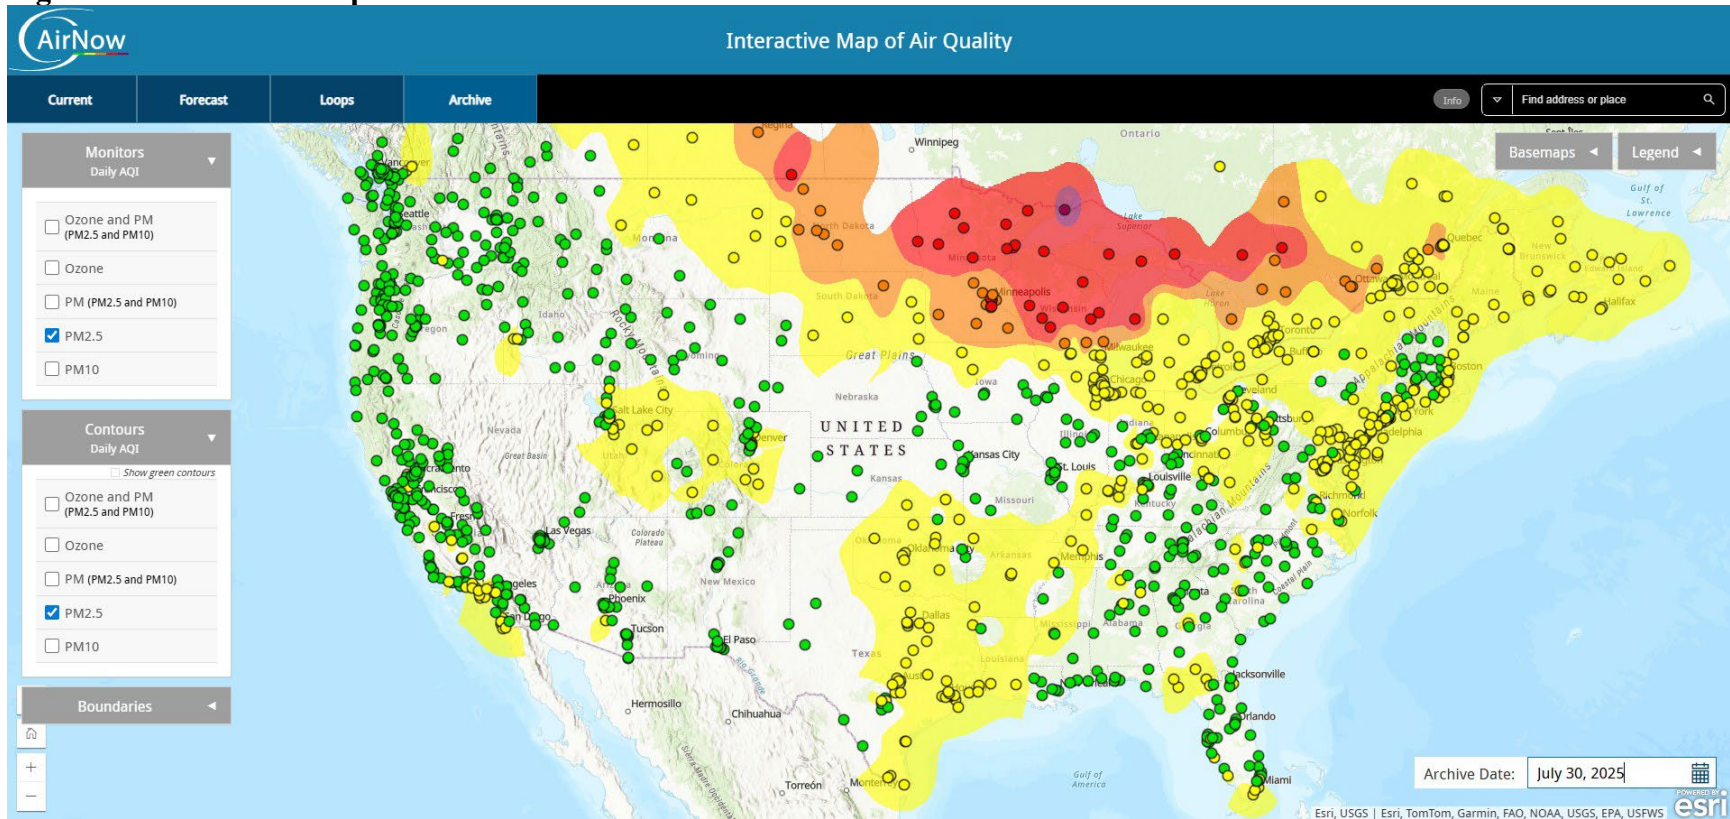

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-10 – AirNow Tech Map for 07/30/25

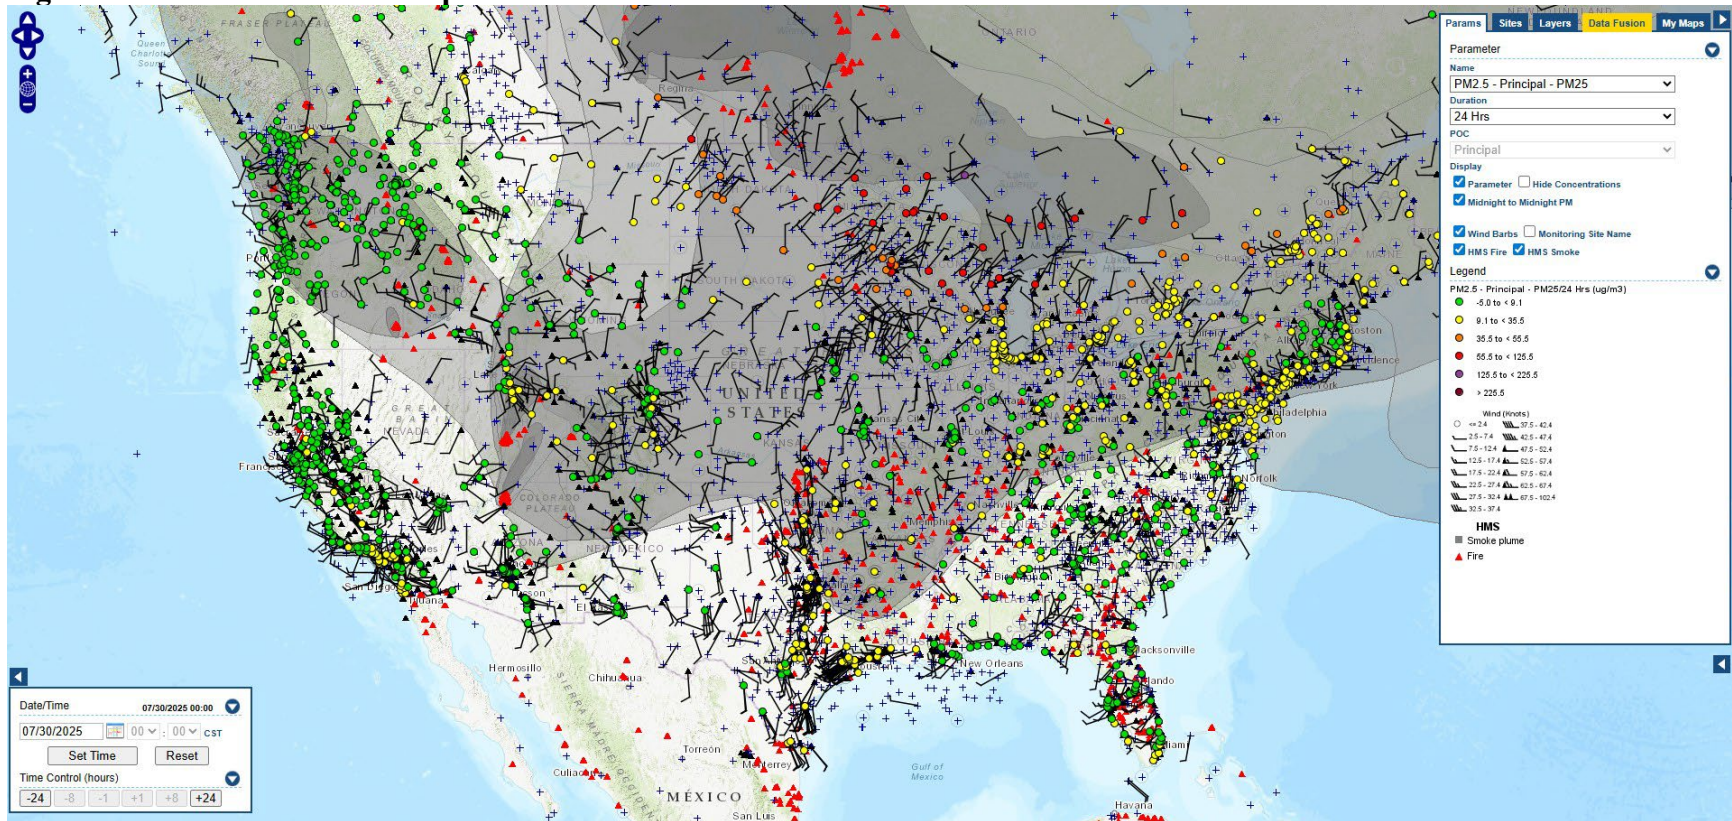

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-11 – AirNow Map for 07/31/25

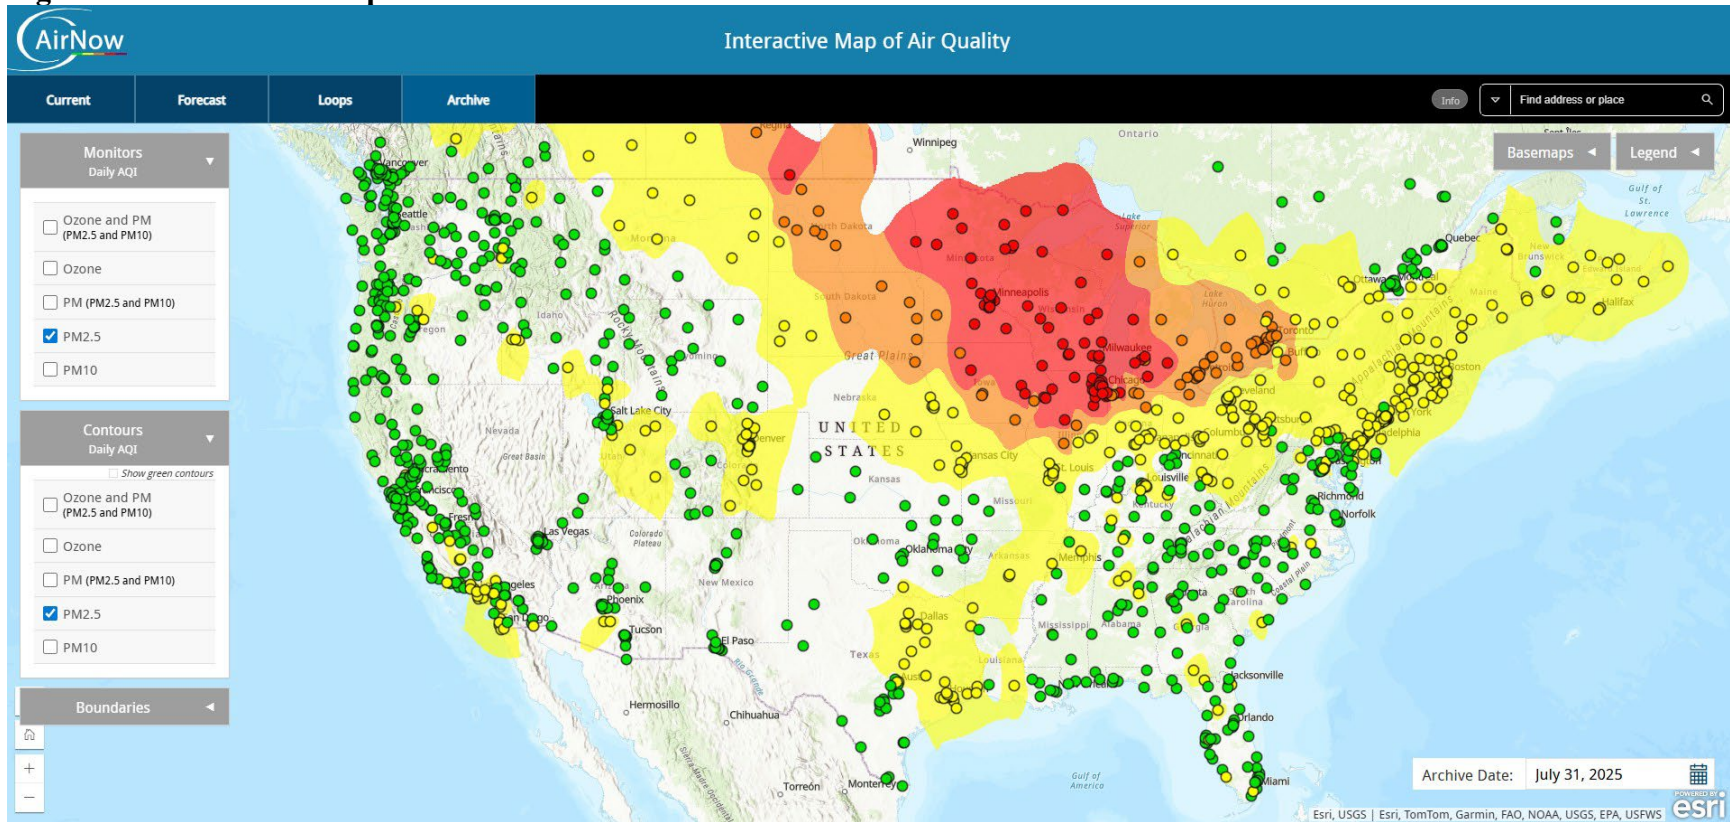

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-12 – AirNow Tech Map for 07/31/25

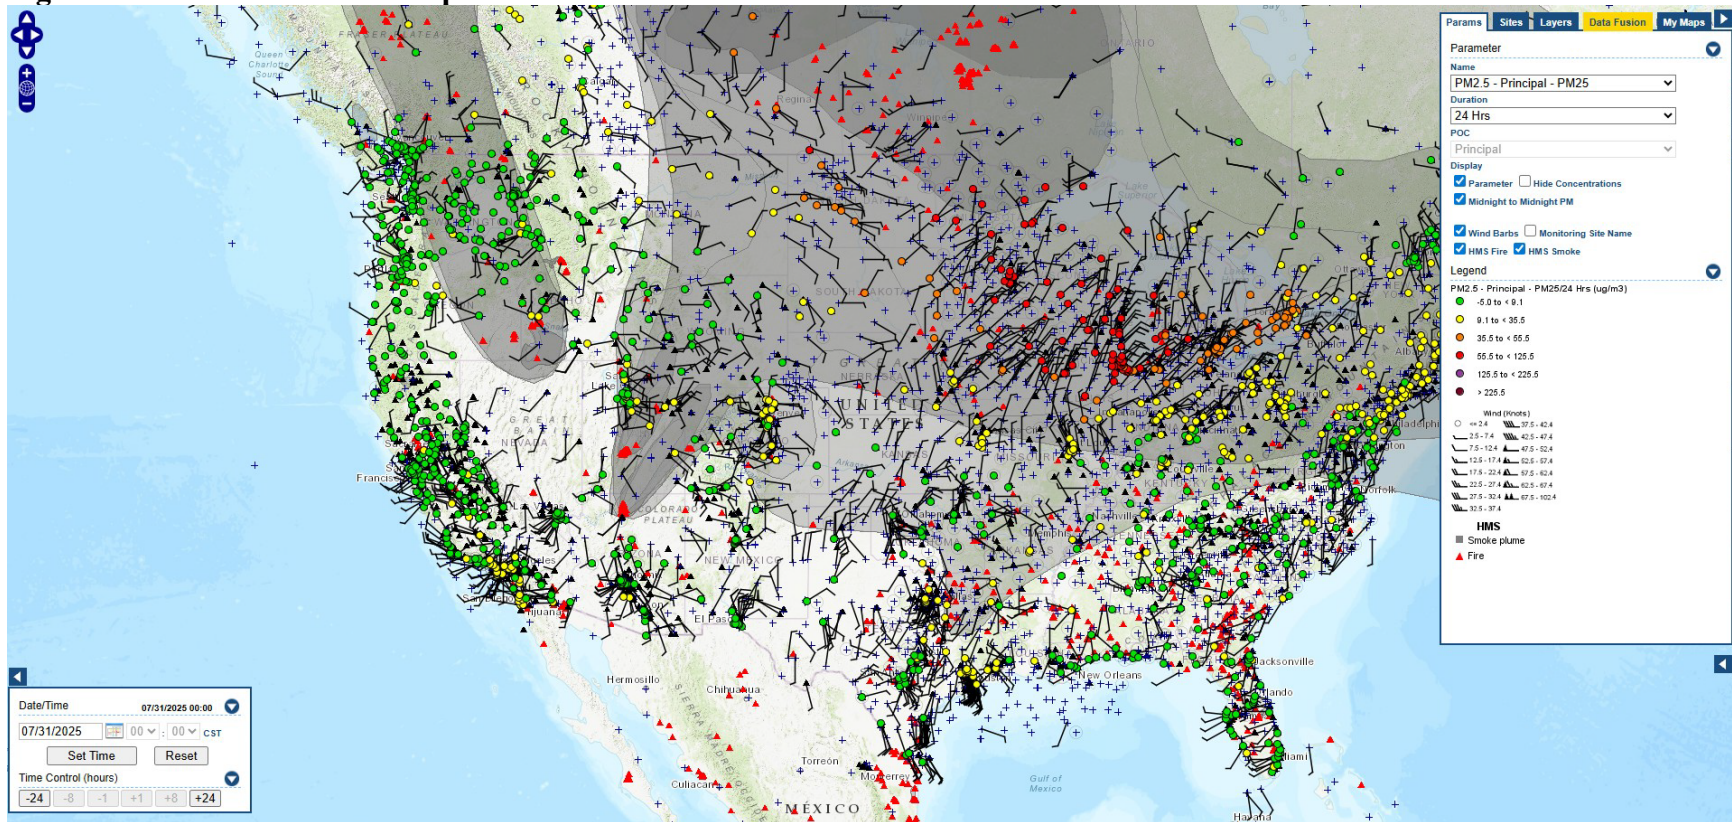

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-13 – AirNow Map for 08/01/25

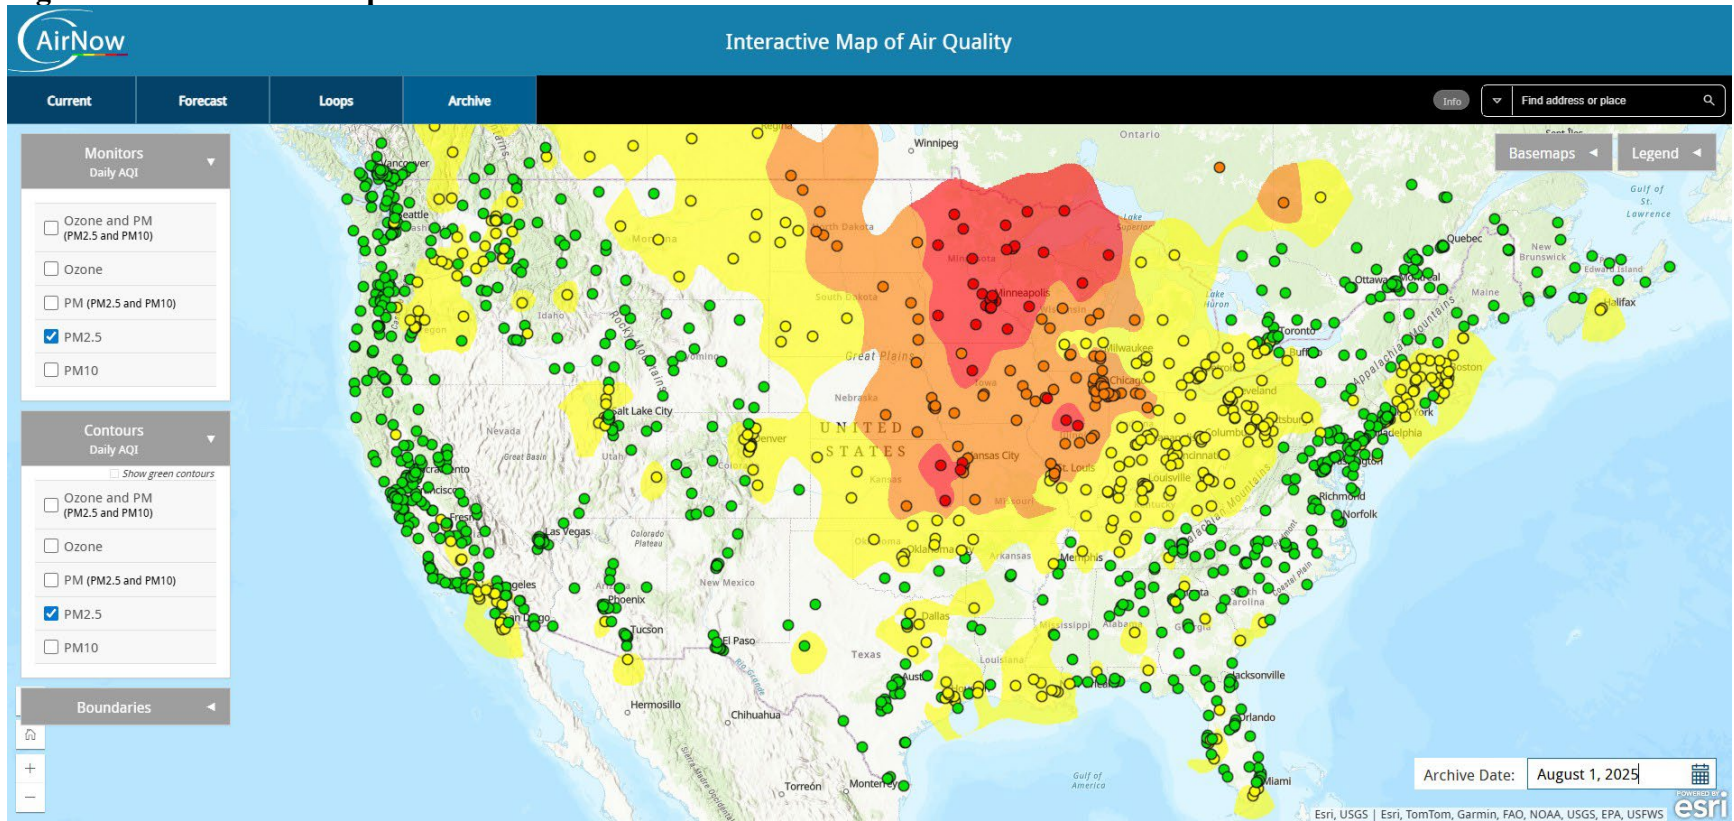

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-14 – AirNow Tech Map for 08/01/25

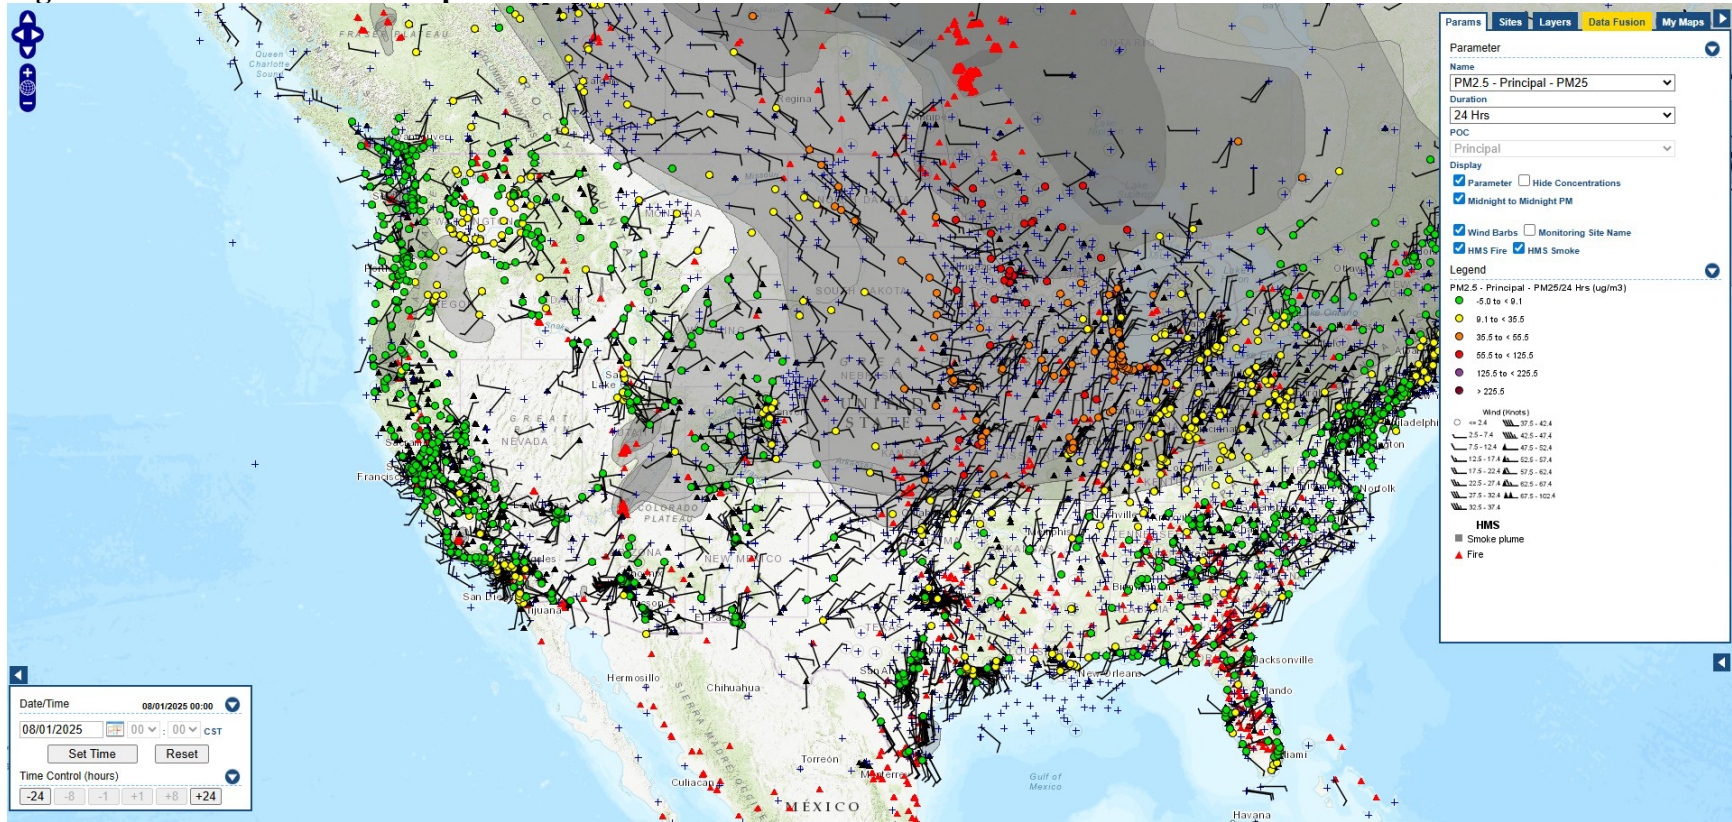

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-15 – AirNow Map for 08/02/25

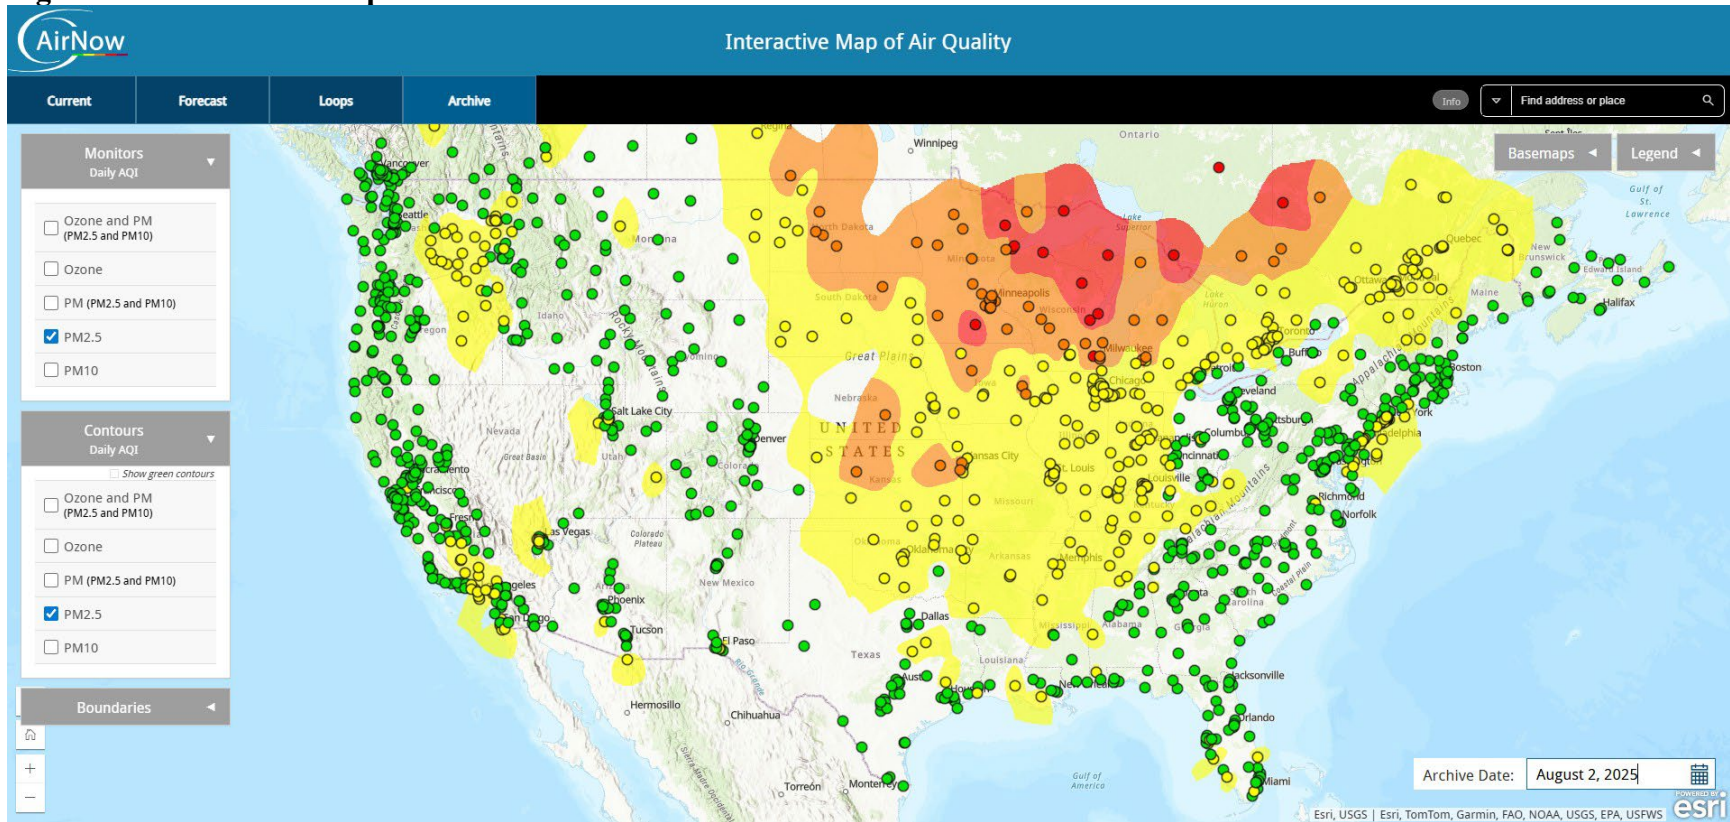

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-16 – AirNow Tech Map for 08/02/25

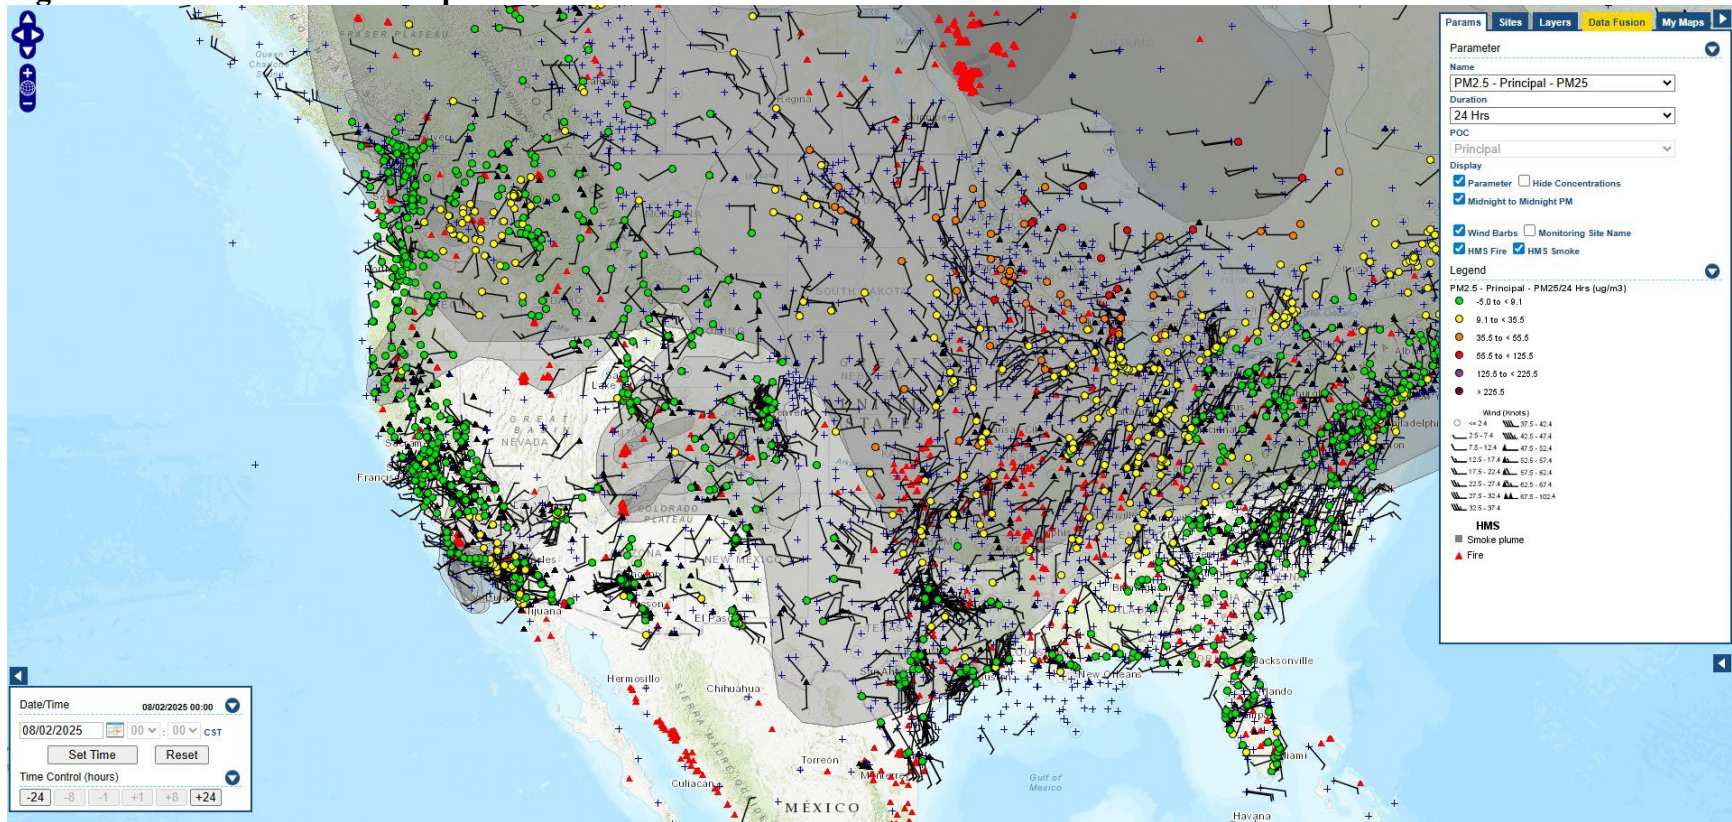

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-17 – AirNow Map for 08/10/25

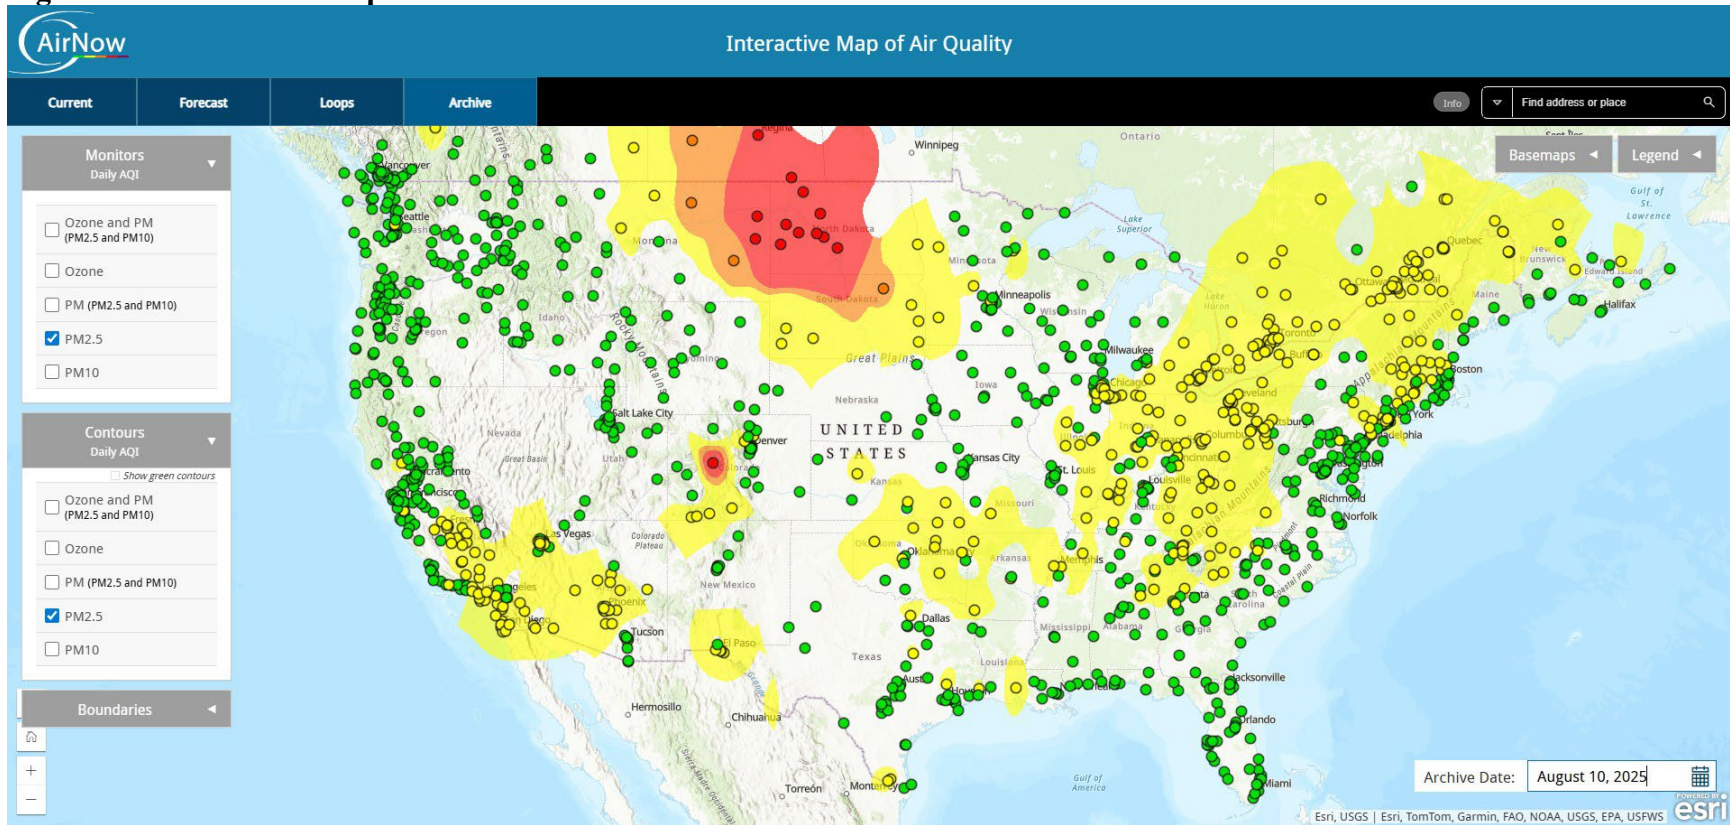

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-18 – AirNow Tech Map for 08/10/25

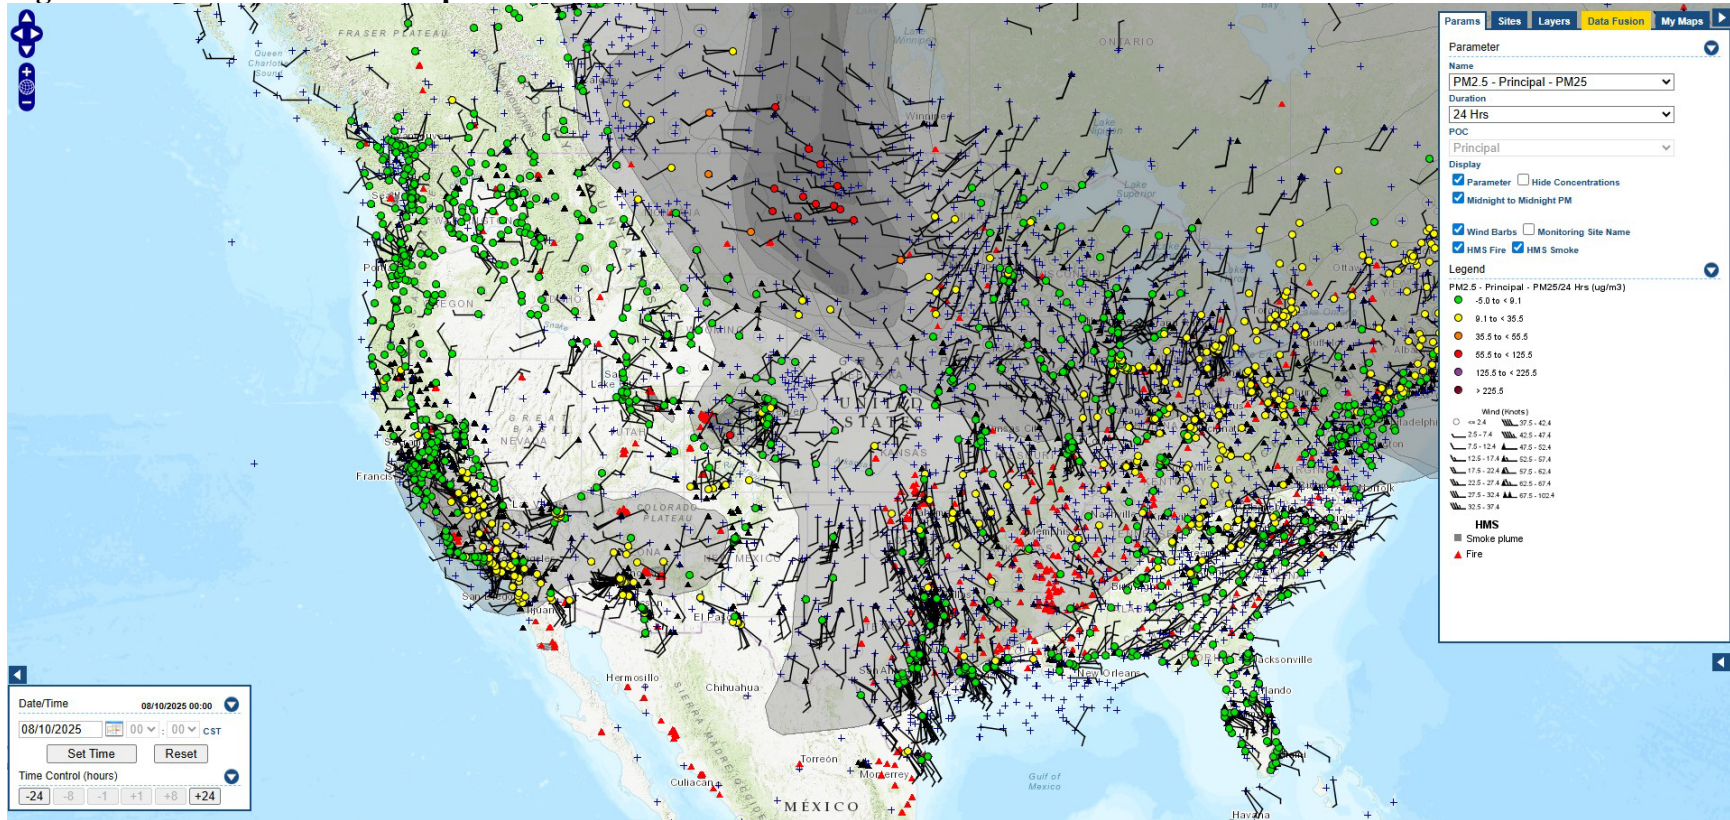

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-19 – AirNow Map for 08/11/25

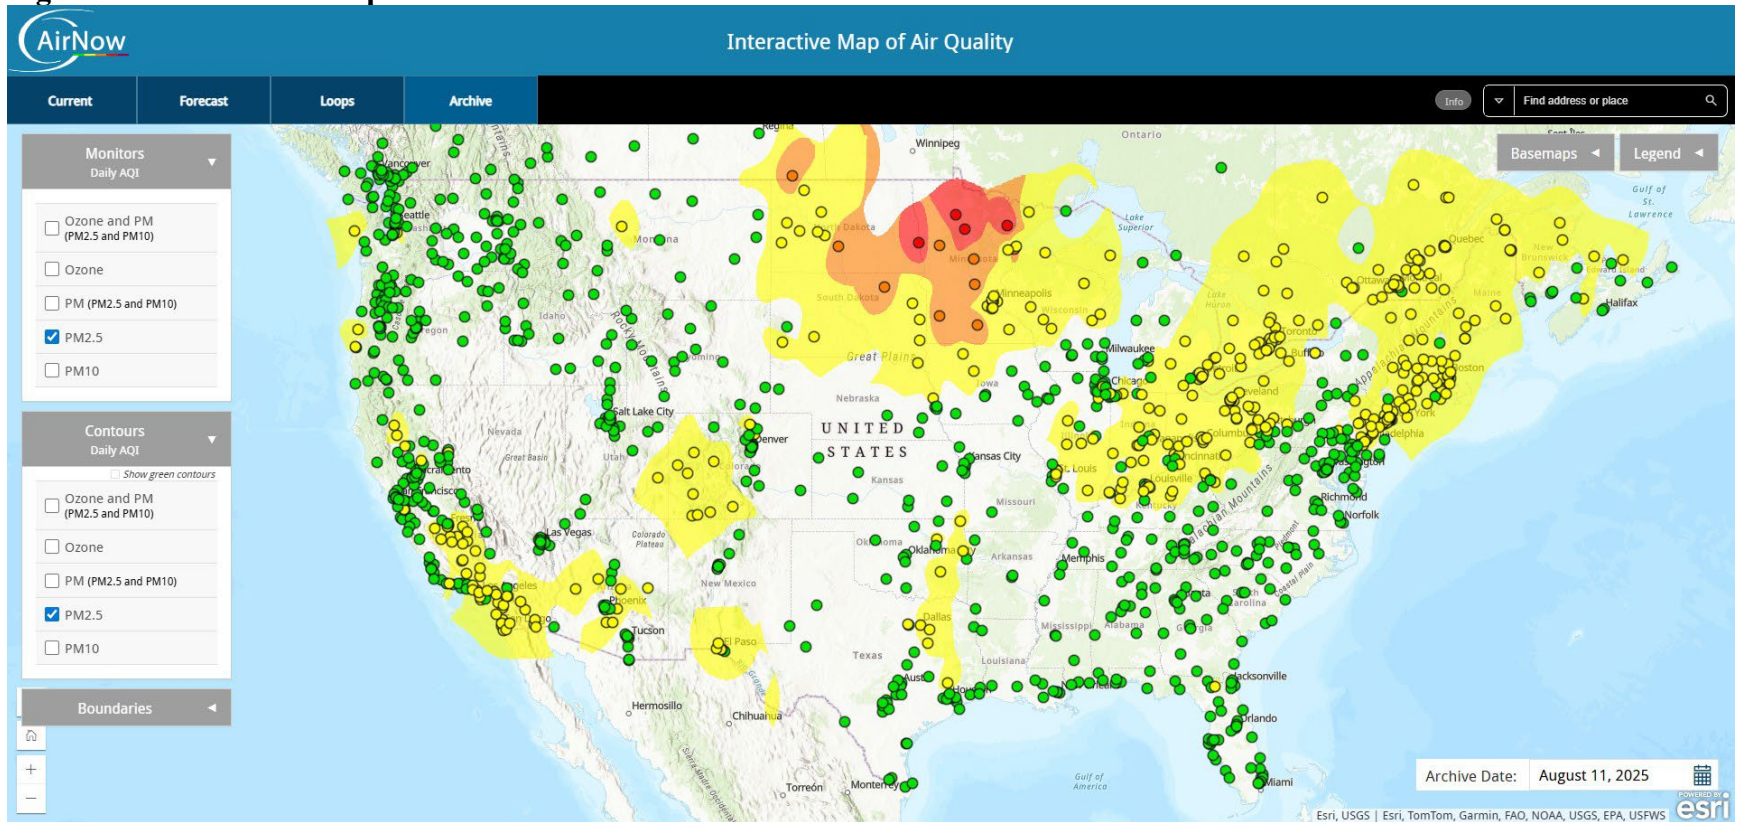

# Appendix A

## AirNow Maps for 24-hour PM<sub>2.5</sub> High Concentration Days


Figure A-20 – AirNow Tech Map for 08/11/25

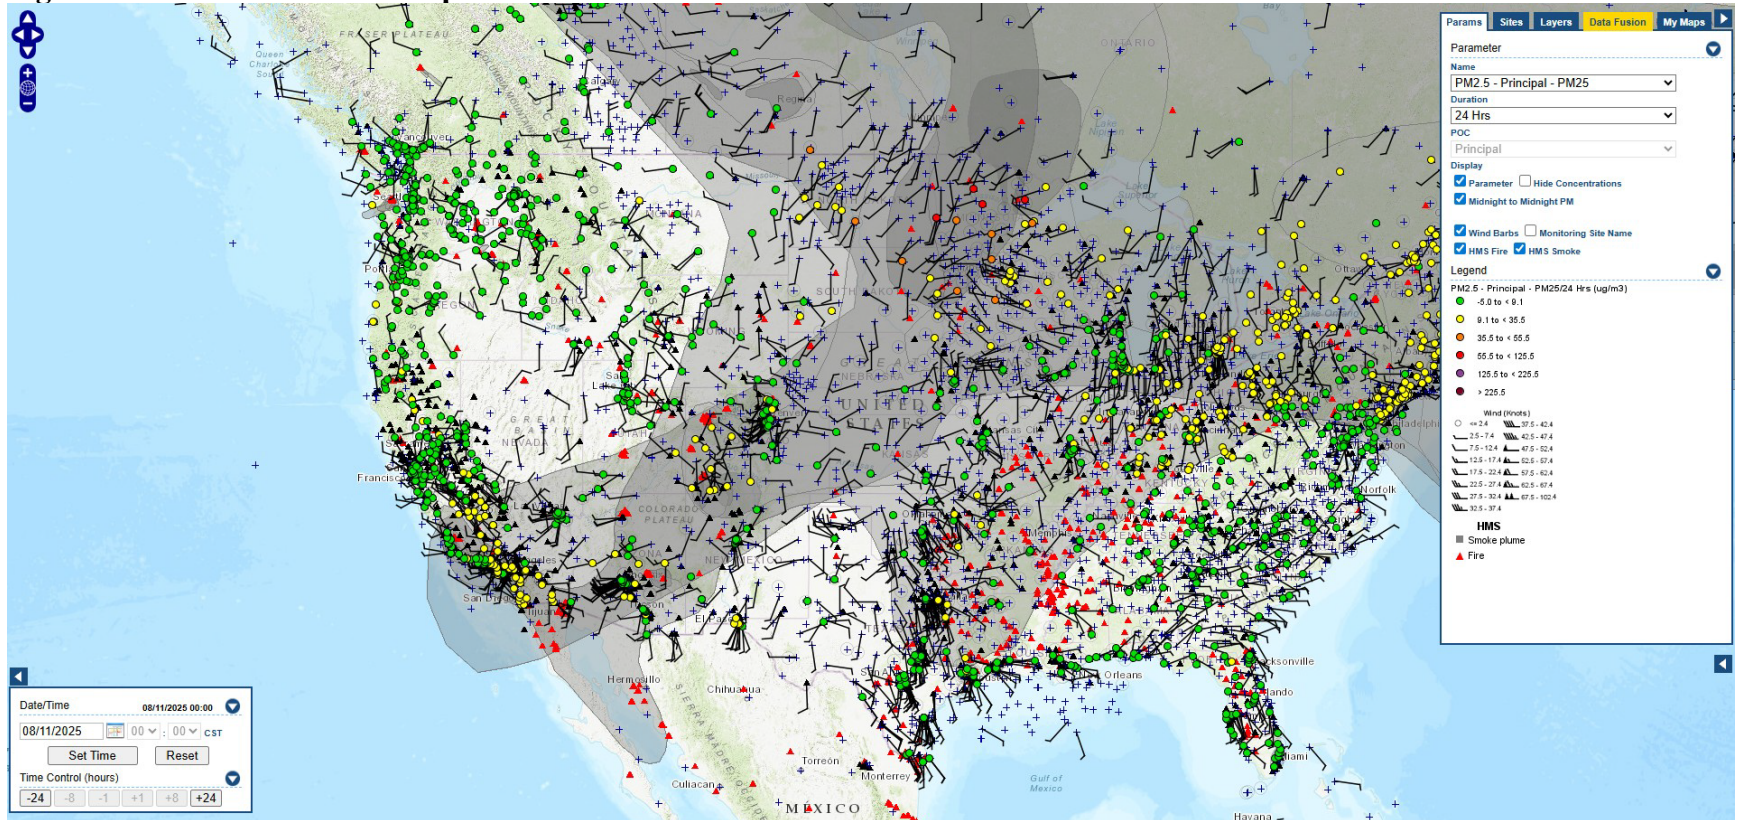

# Appendix B

## AirNow Maps for 24-hour PM<sub>10</sub> High Concentration Day


Figure B-1 - AirNow Map for 01/17/25

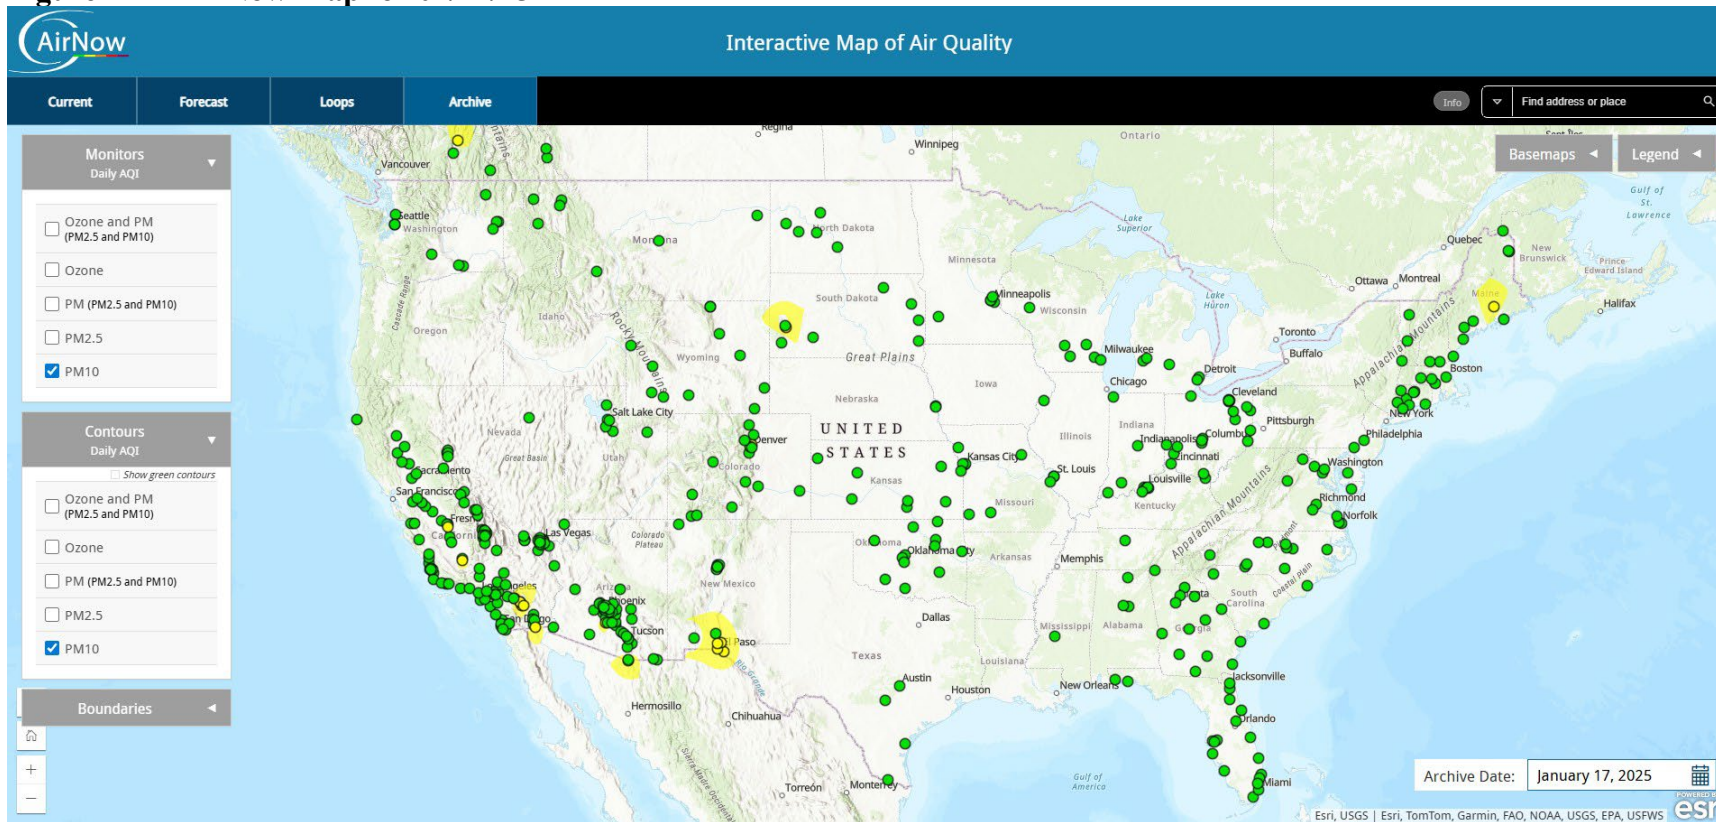

# Appendix B

## AirNow Maps for 24-hour PM<sub>10</sub> High Concentration Day


Figure B-2 - AirNow Tech Map for 01/17/25

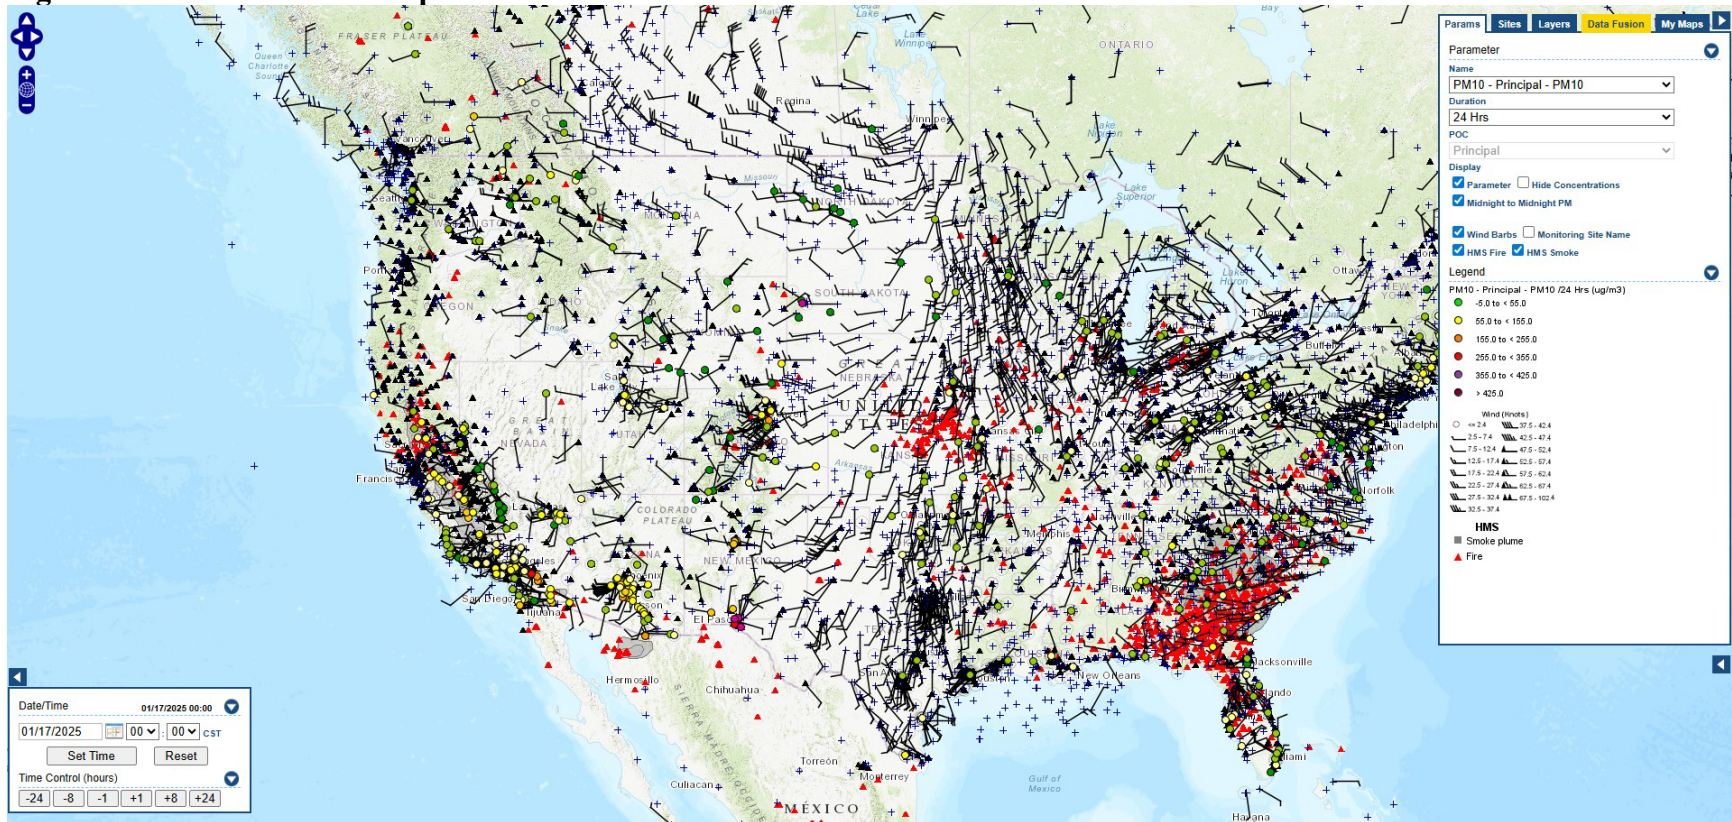

# Appendix B

## AirNow Maps for 24-hour PM<sub>10</sub> High Concentration Day


Figure B-3 – AirNow Map for 01/18/25

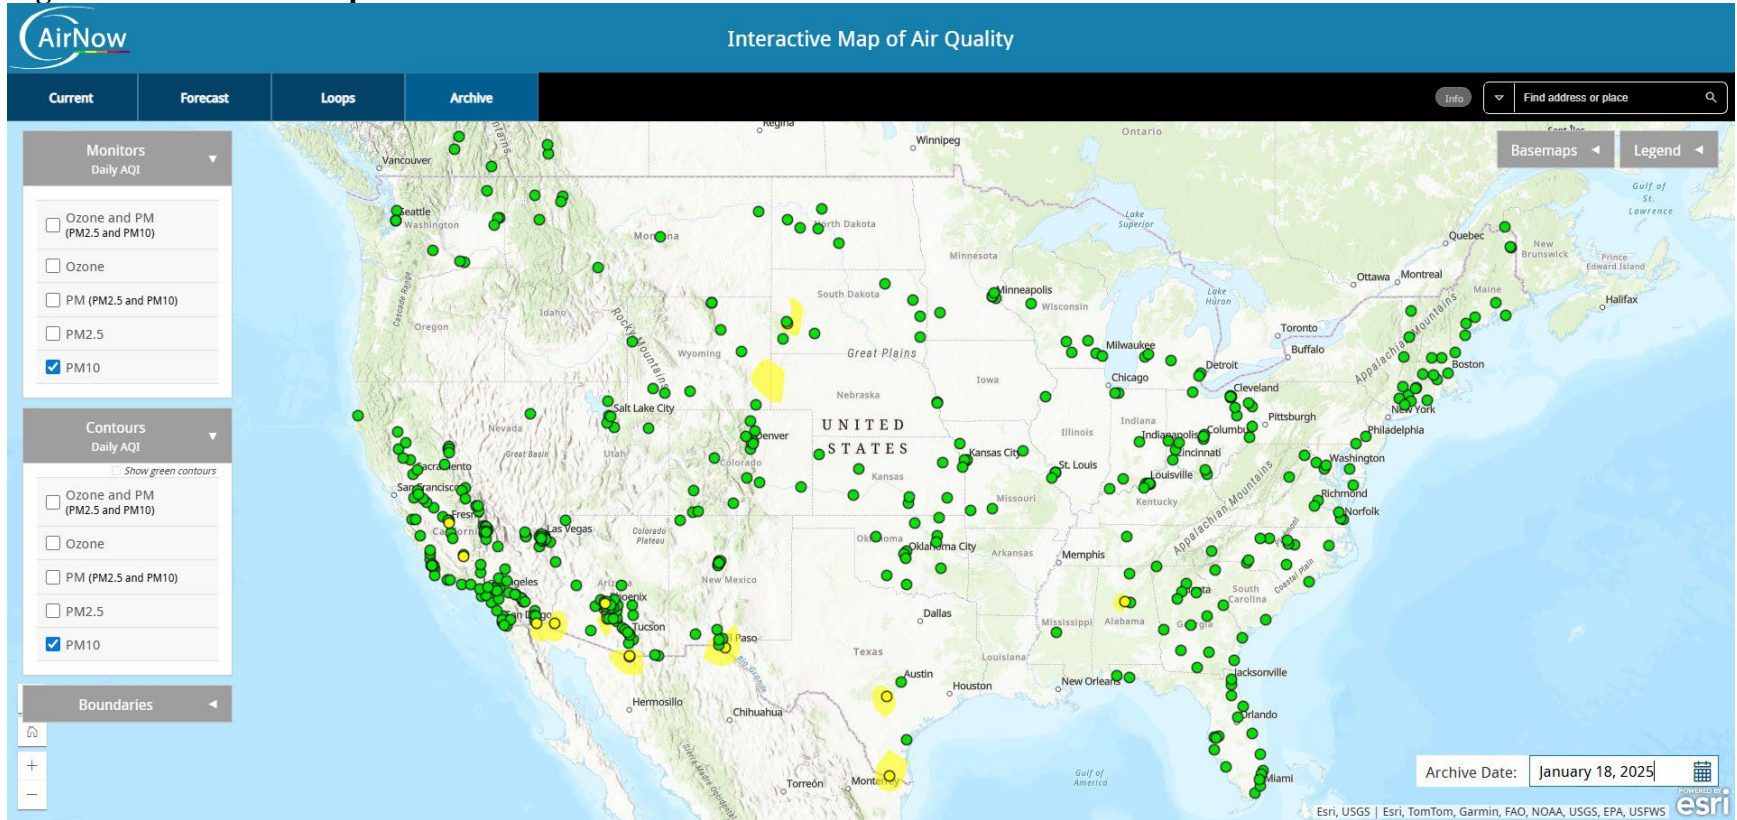

# Appendix B

## AirNow Maps for 24-hour PM<sub>10</sub> High Concentration Day


Figure B-4 – AirNow Tech Map for 01/18/25

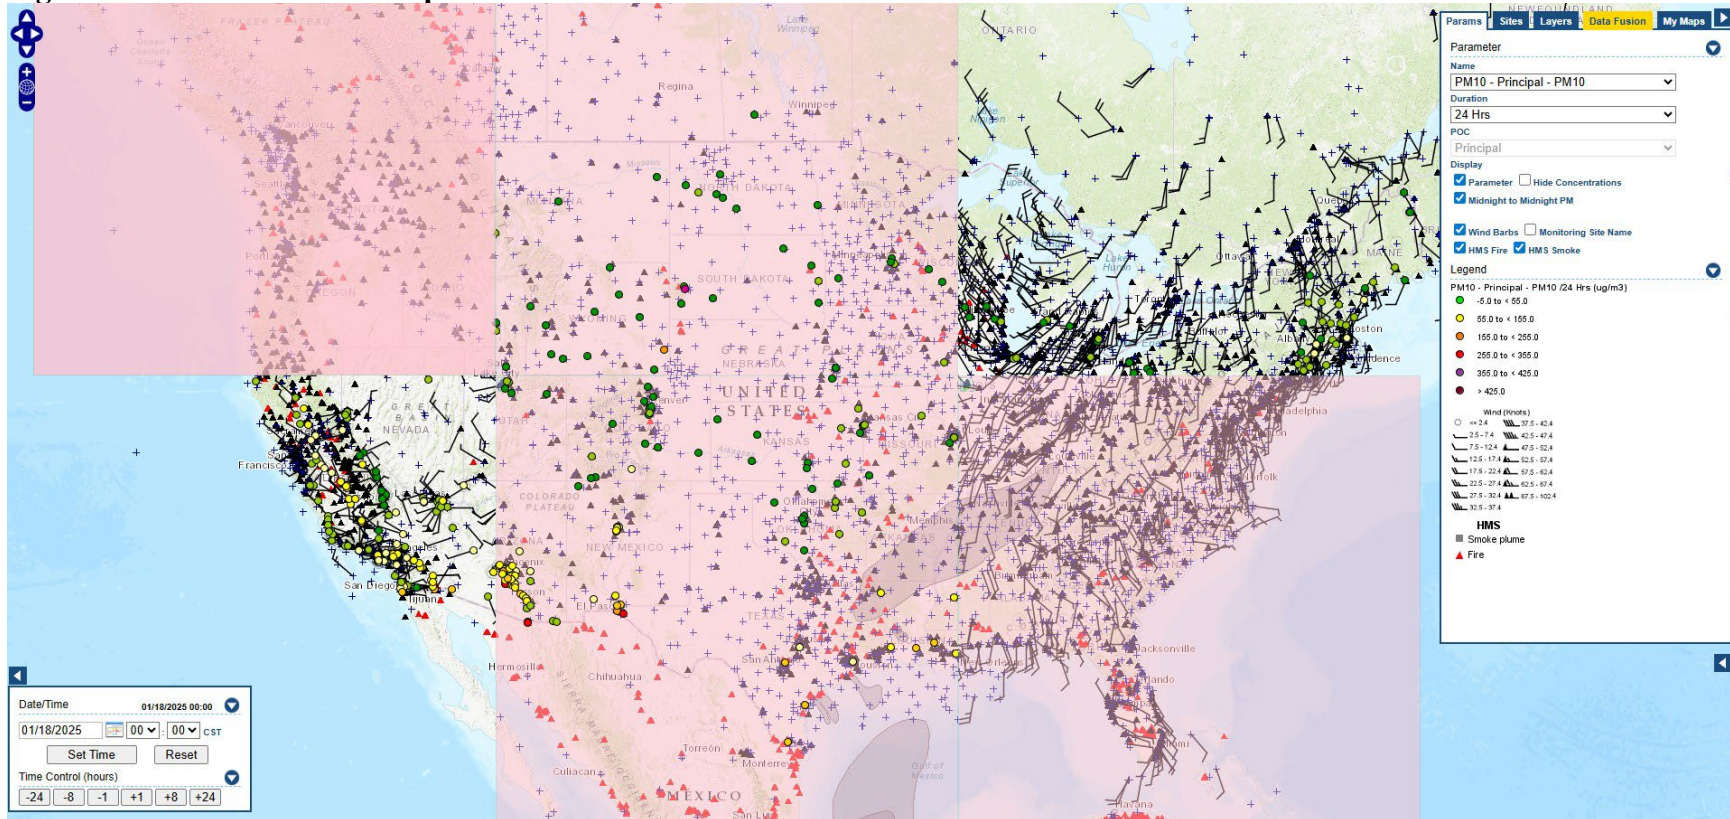

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-1 - AirNow Map for 05/06/25

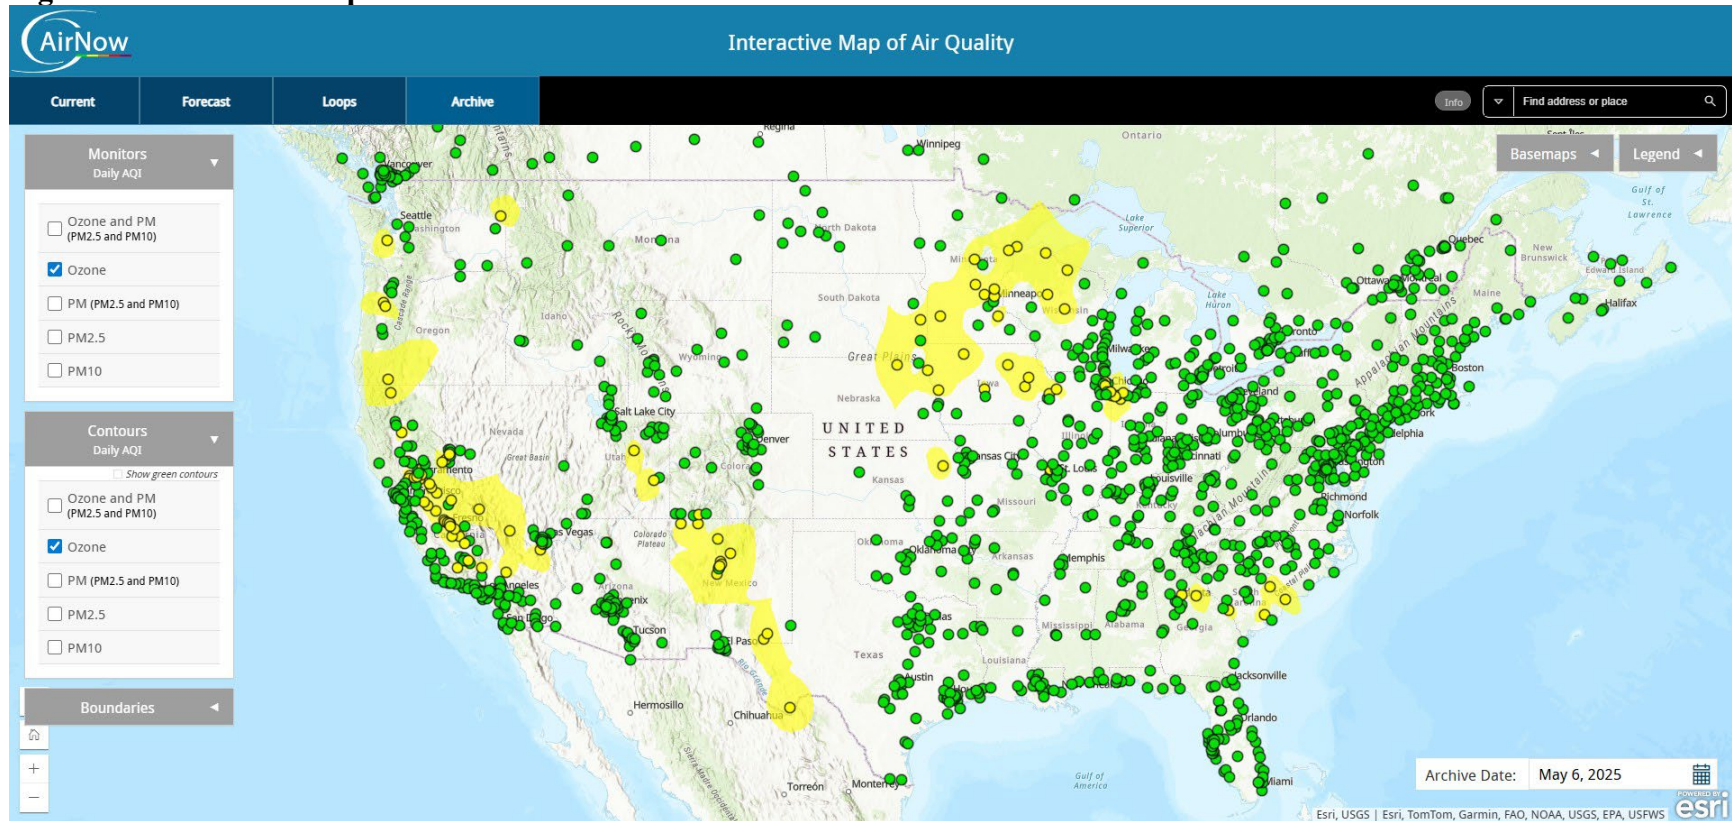

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-2 - AirNow Tech Map for 05/06/25

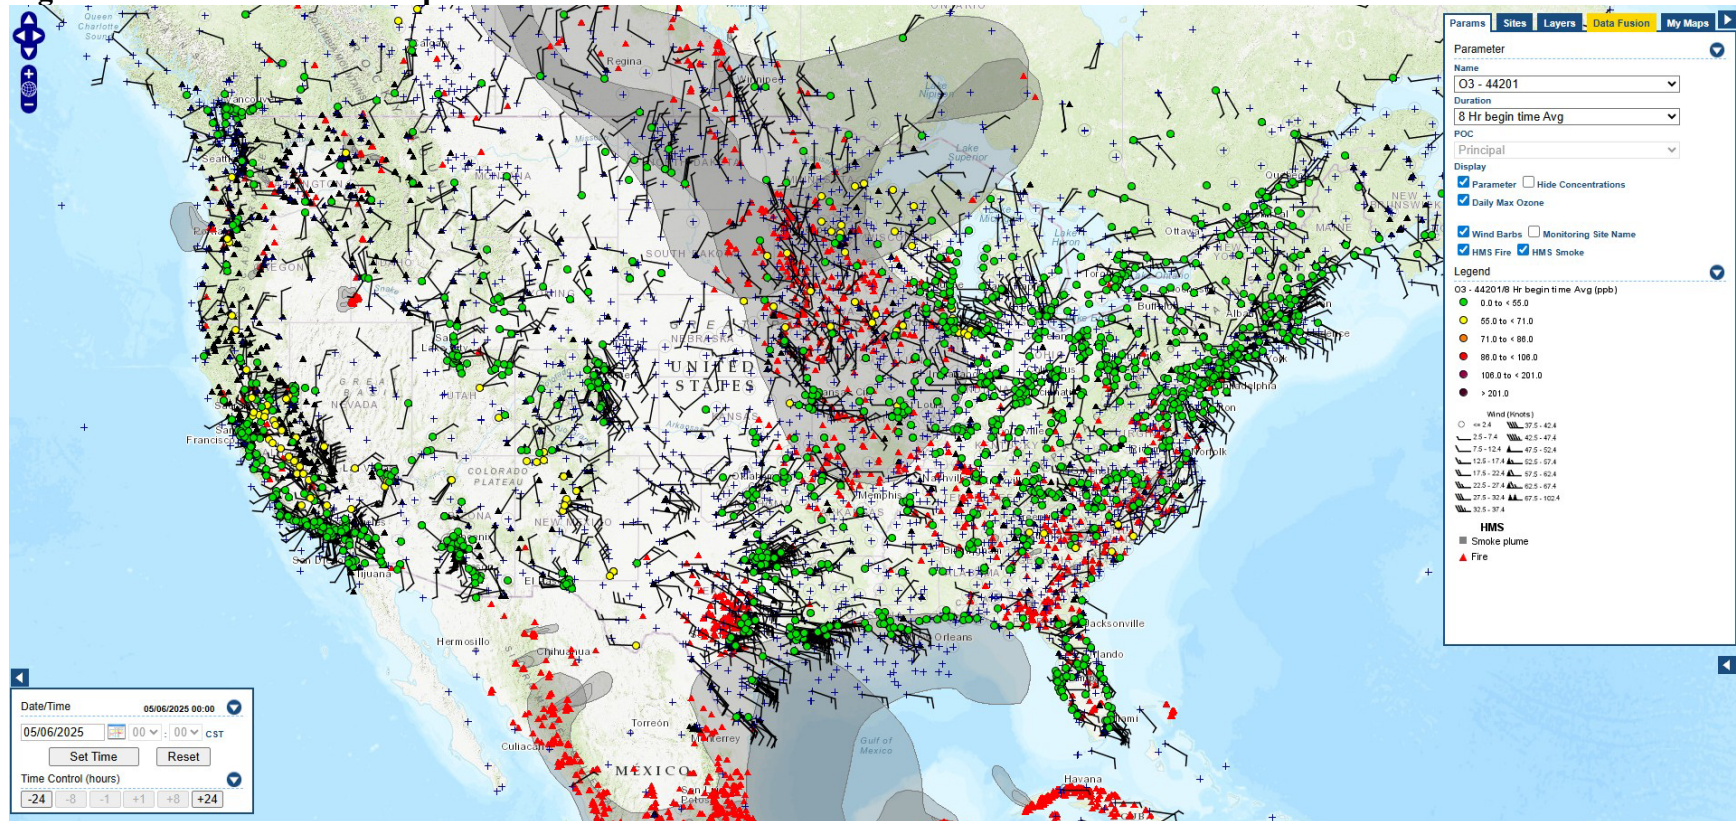

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-3 - AirNow Map for 05/10/25

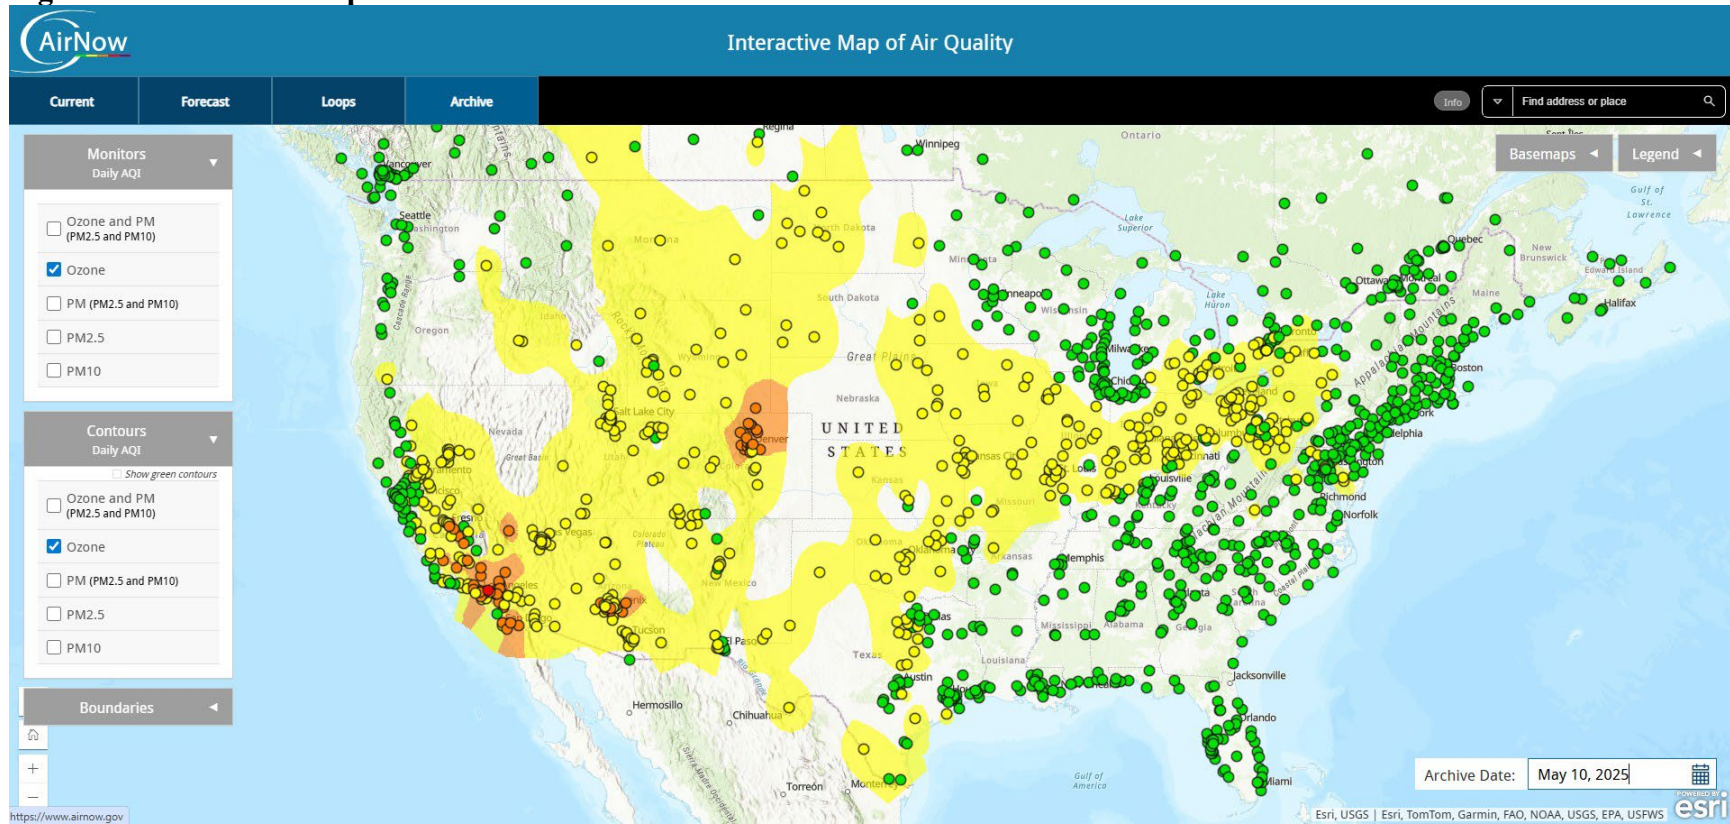

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-4 - AirNow Tech Map for 05/10/25

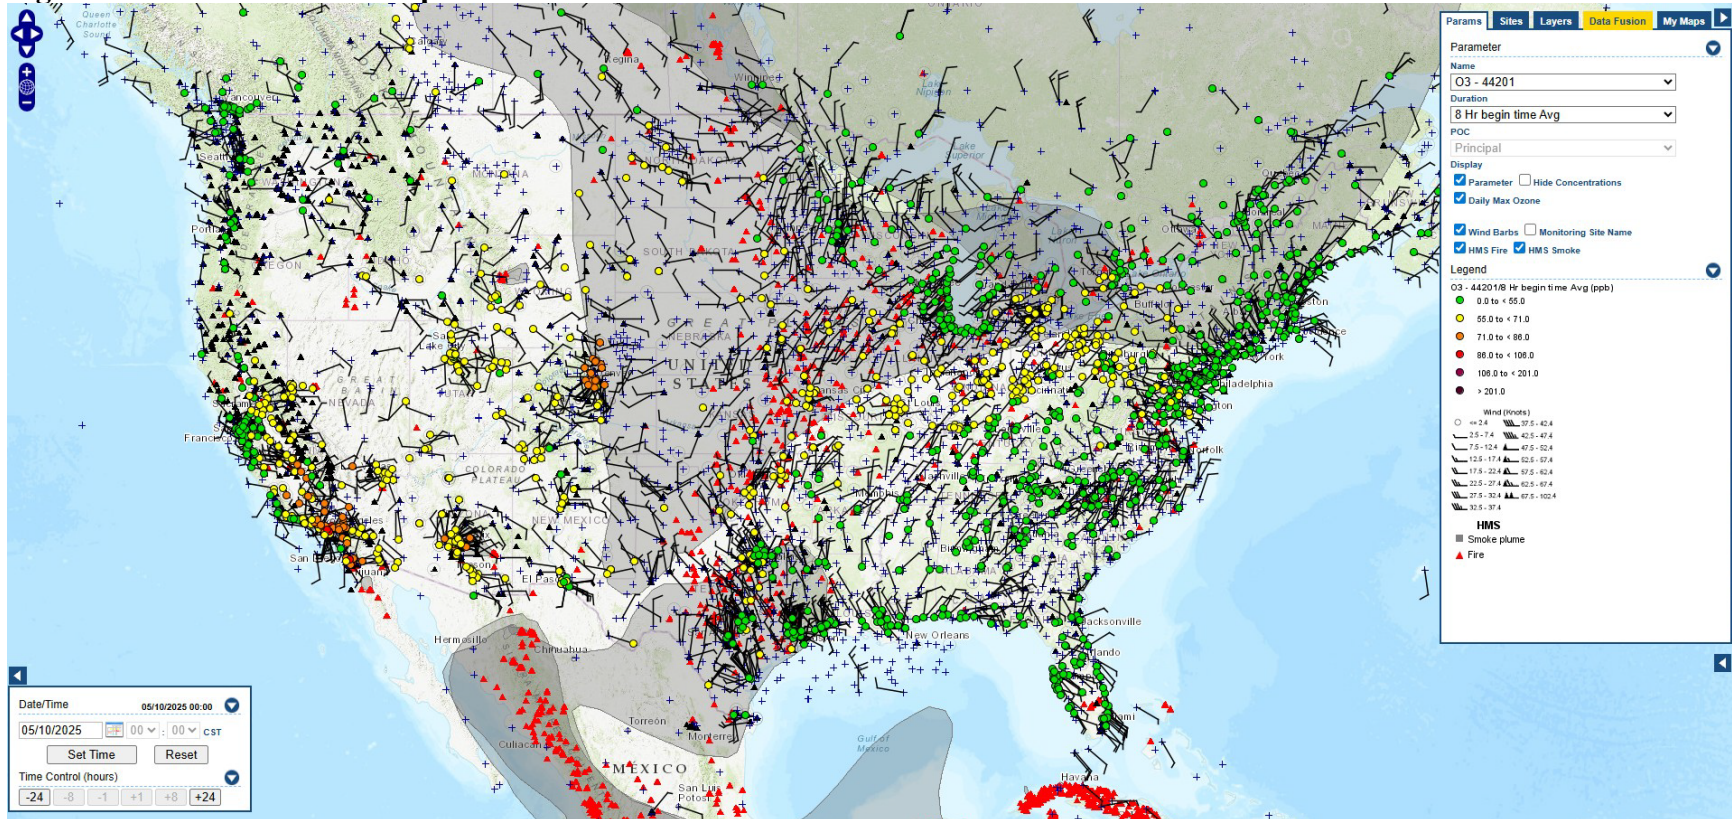

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-5 - AirNow Map for 05/11/25

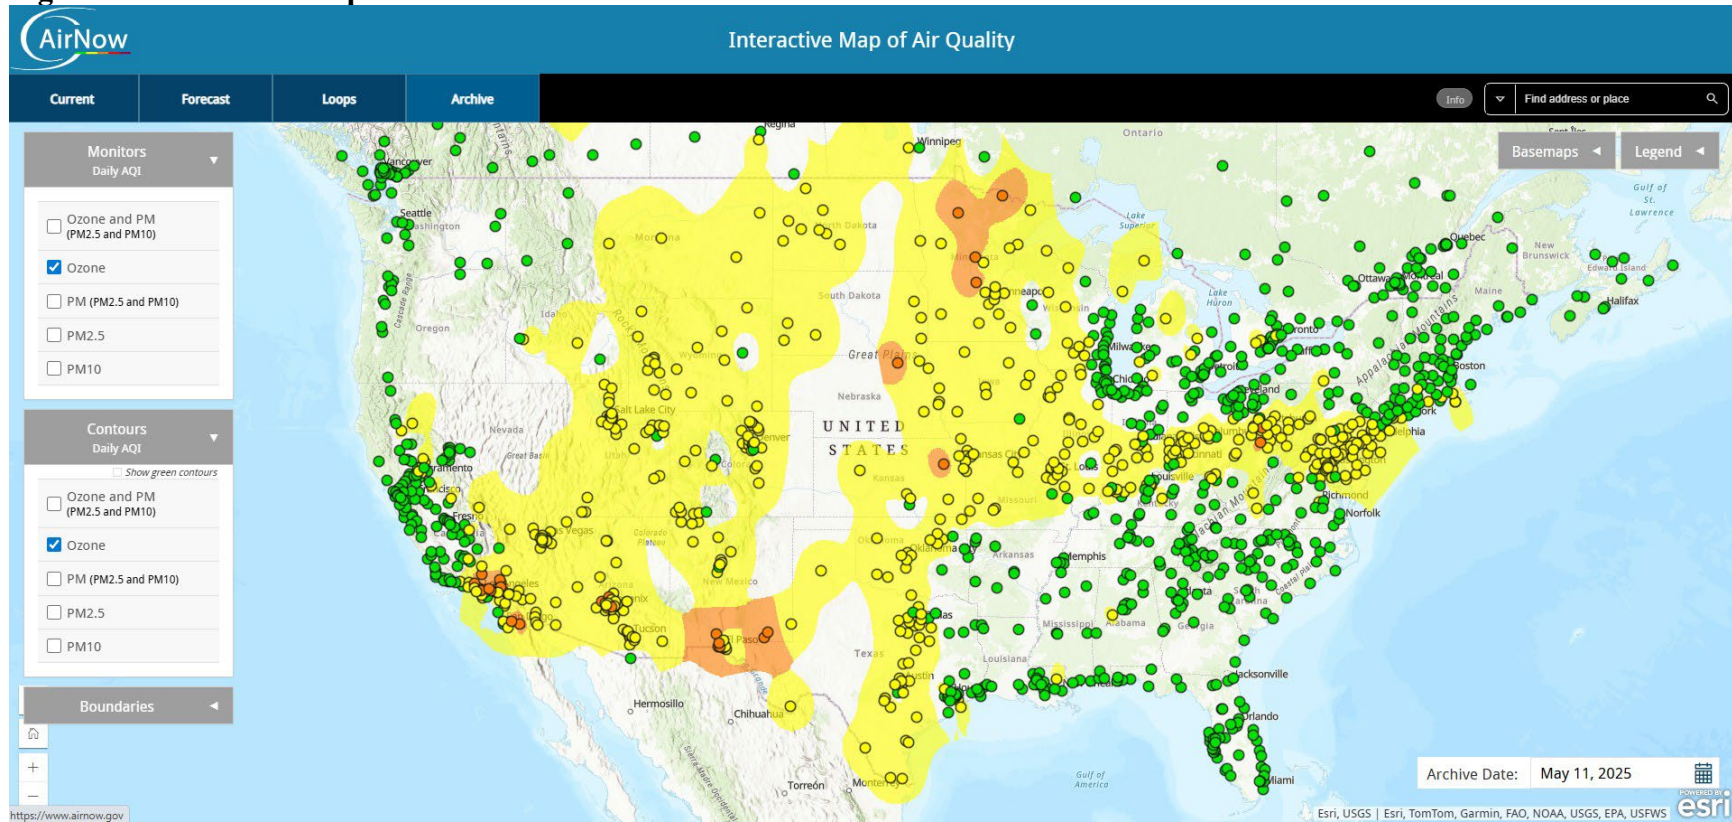

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-6 - AirNow Tech Map for 05/11/25

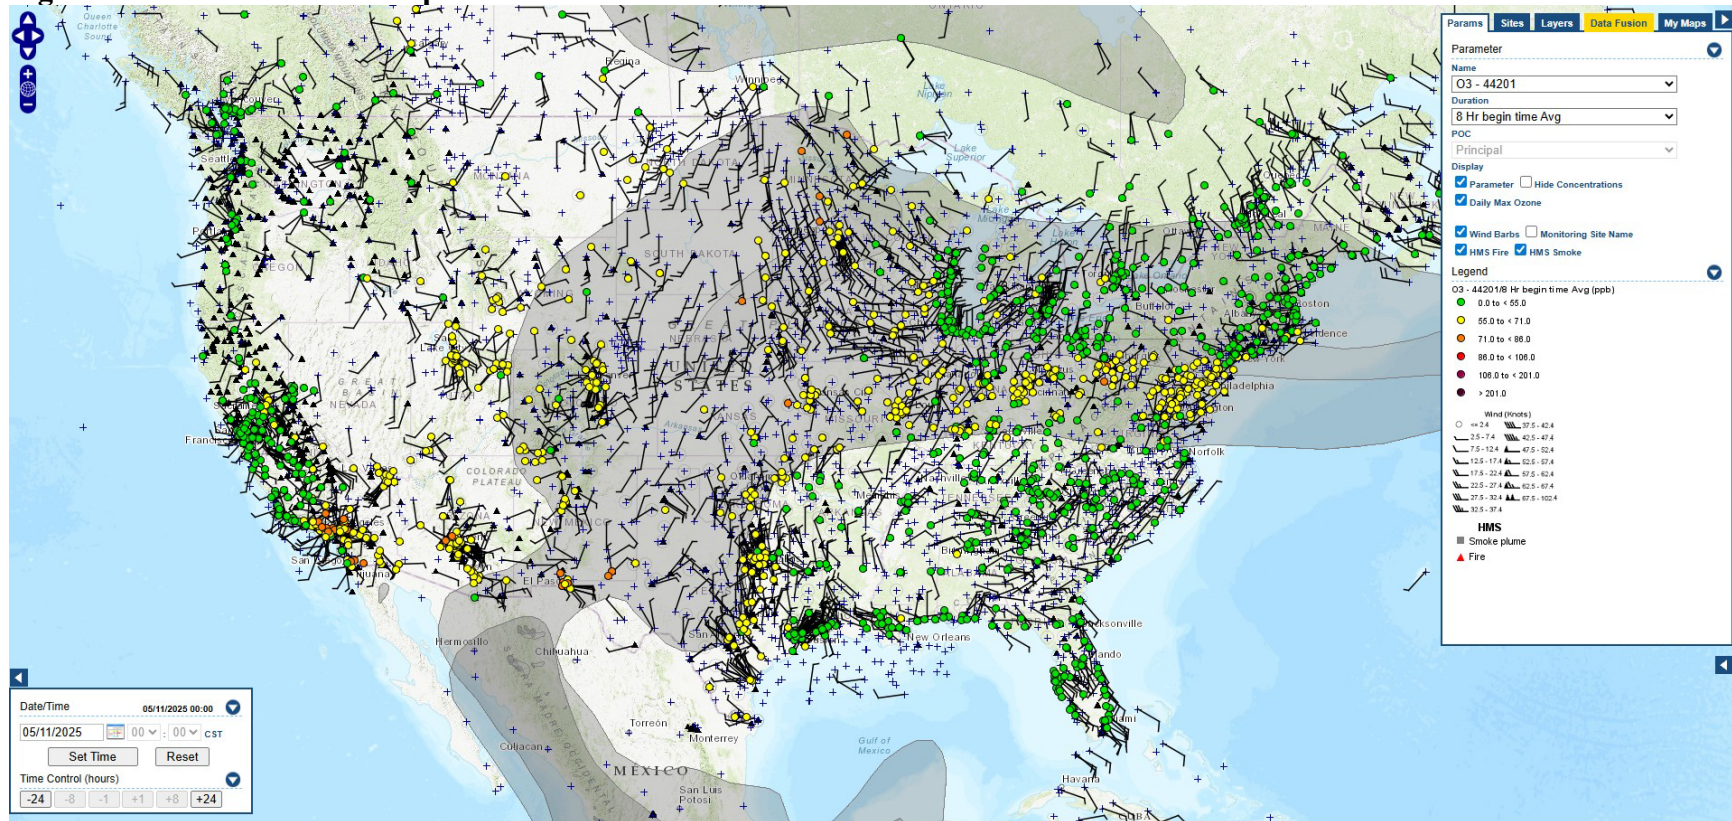

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-7 - AirNow Map for 05/12/25

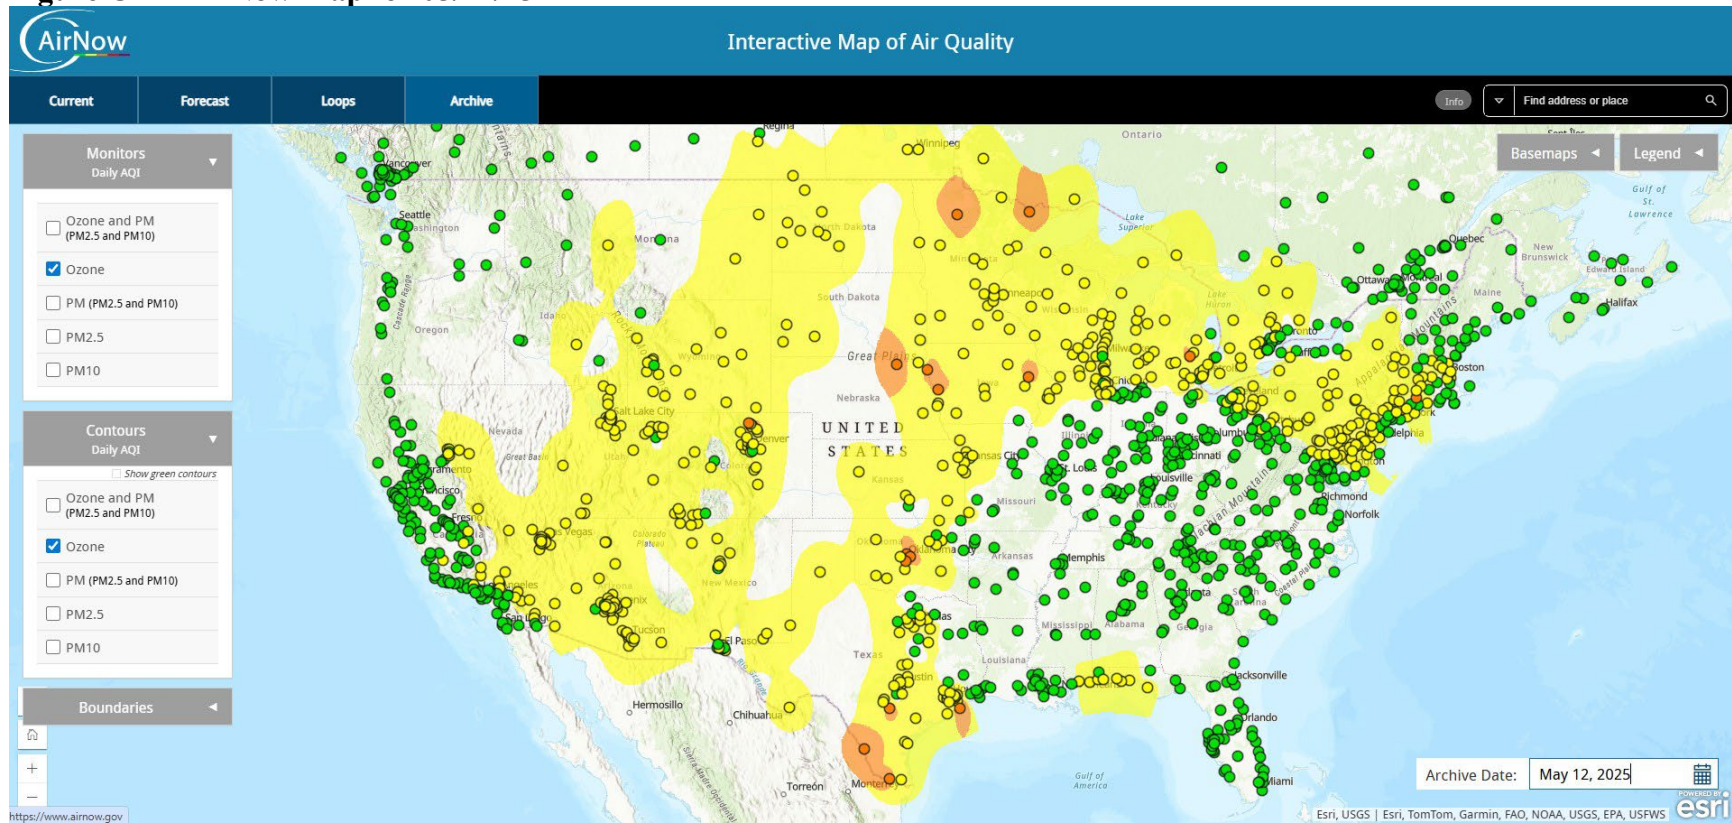

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-8 - AirNow Tech Map for 05/12/25

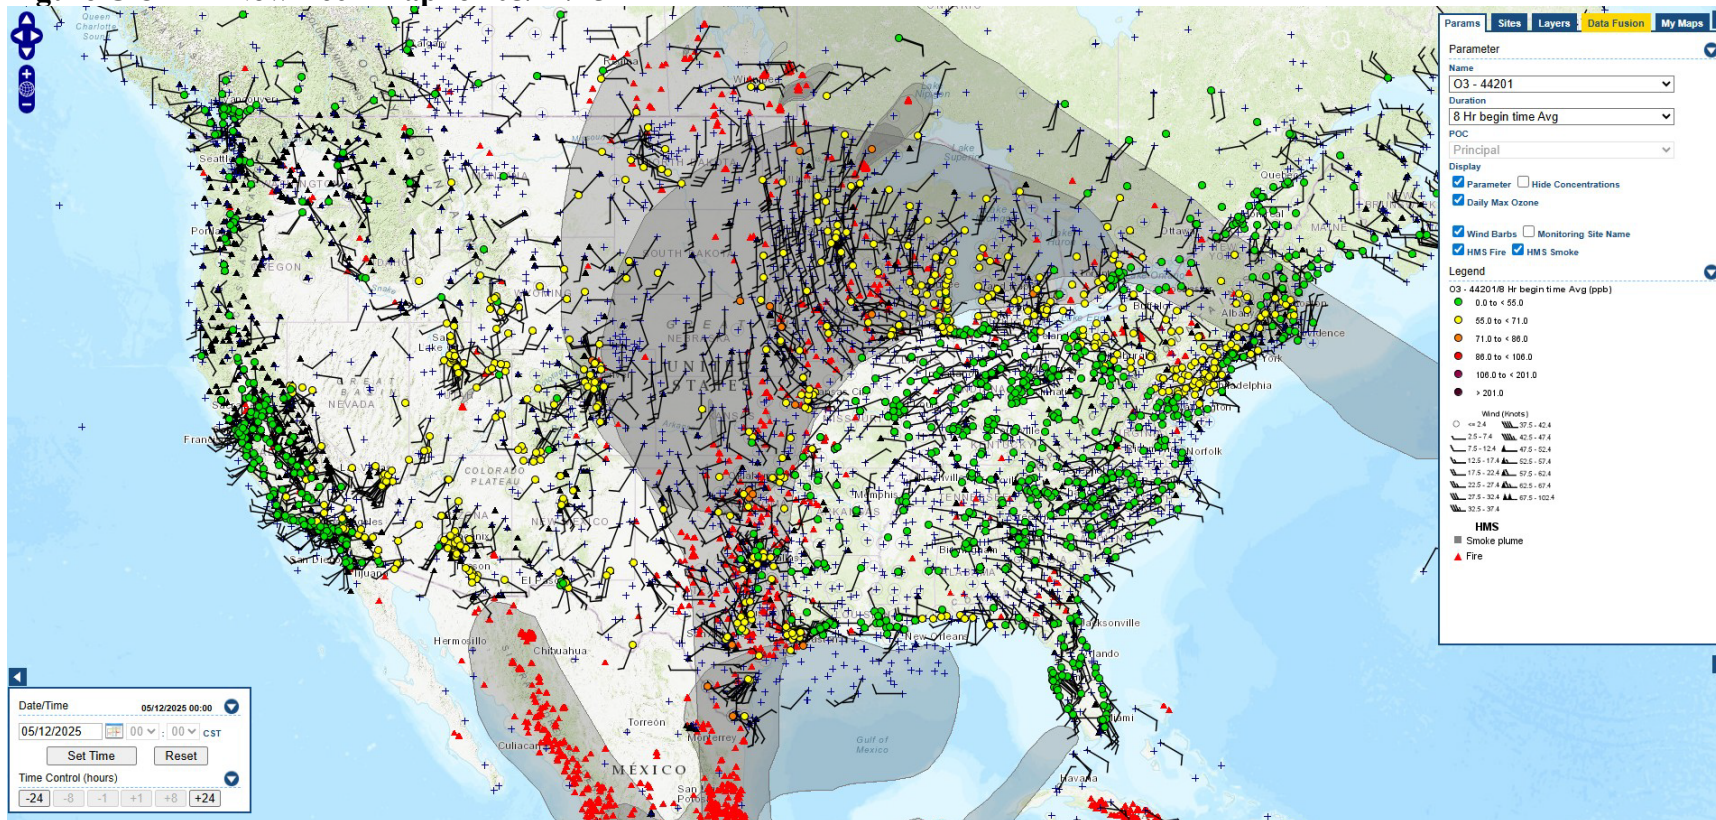

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-9 - AirNow Map for 05/13/25

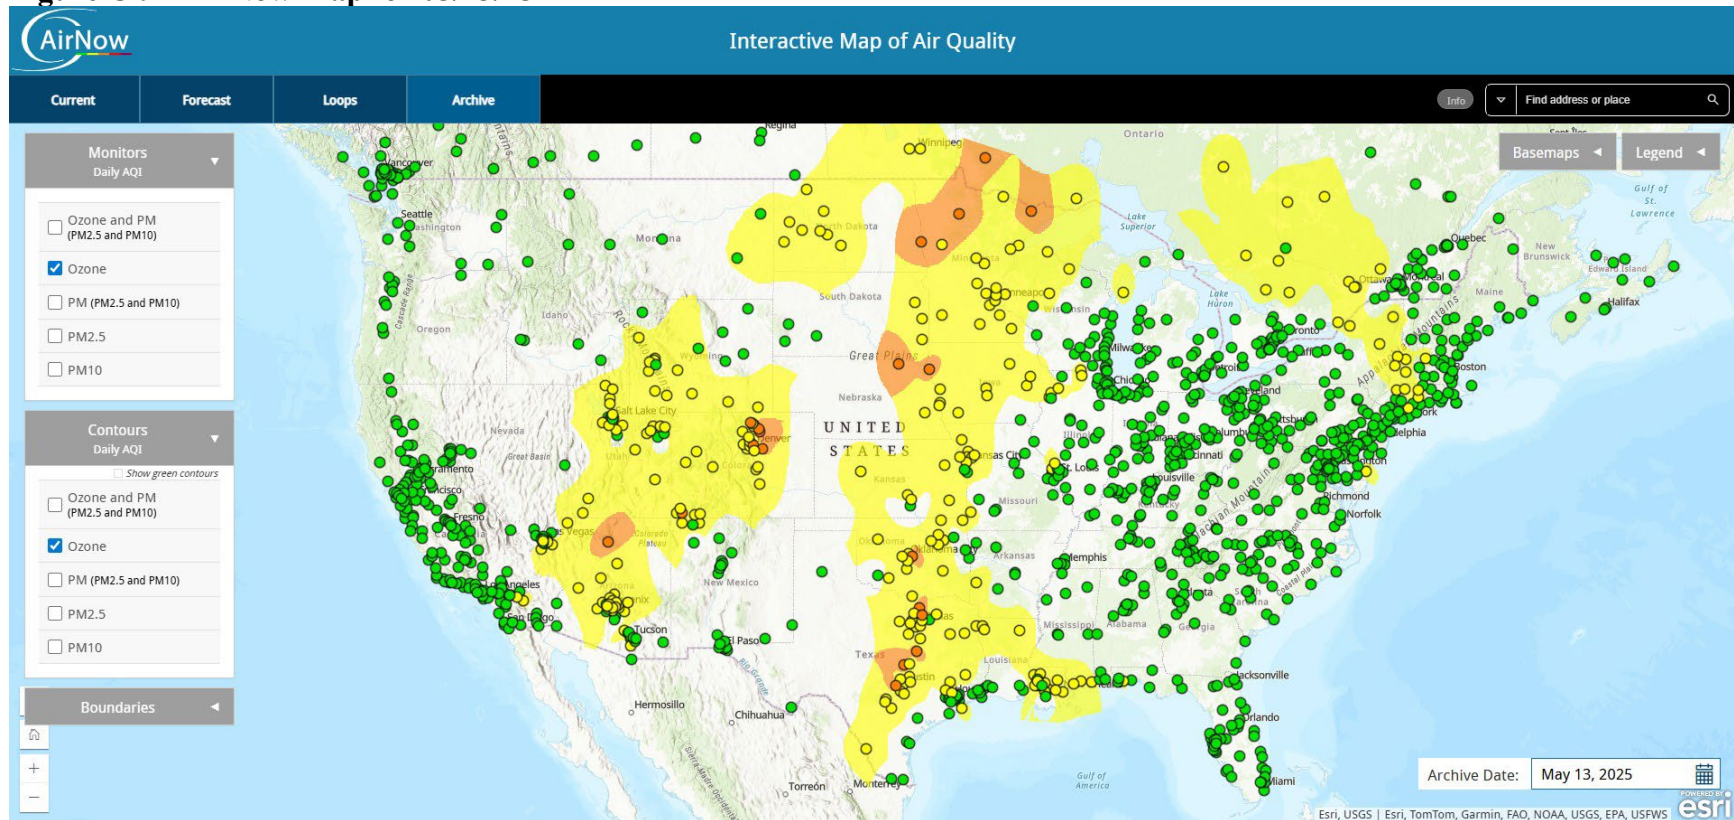

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-10 - AirNow Tech Map for 05/13/25

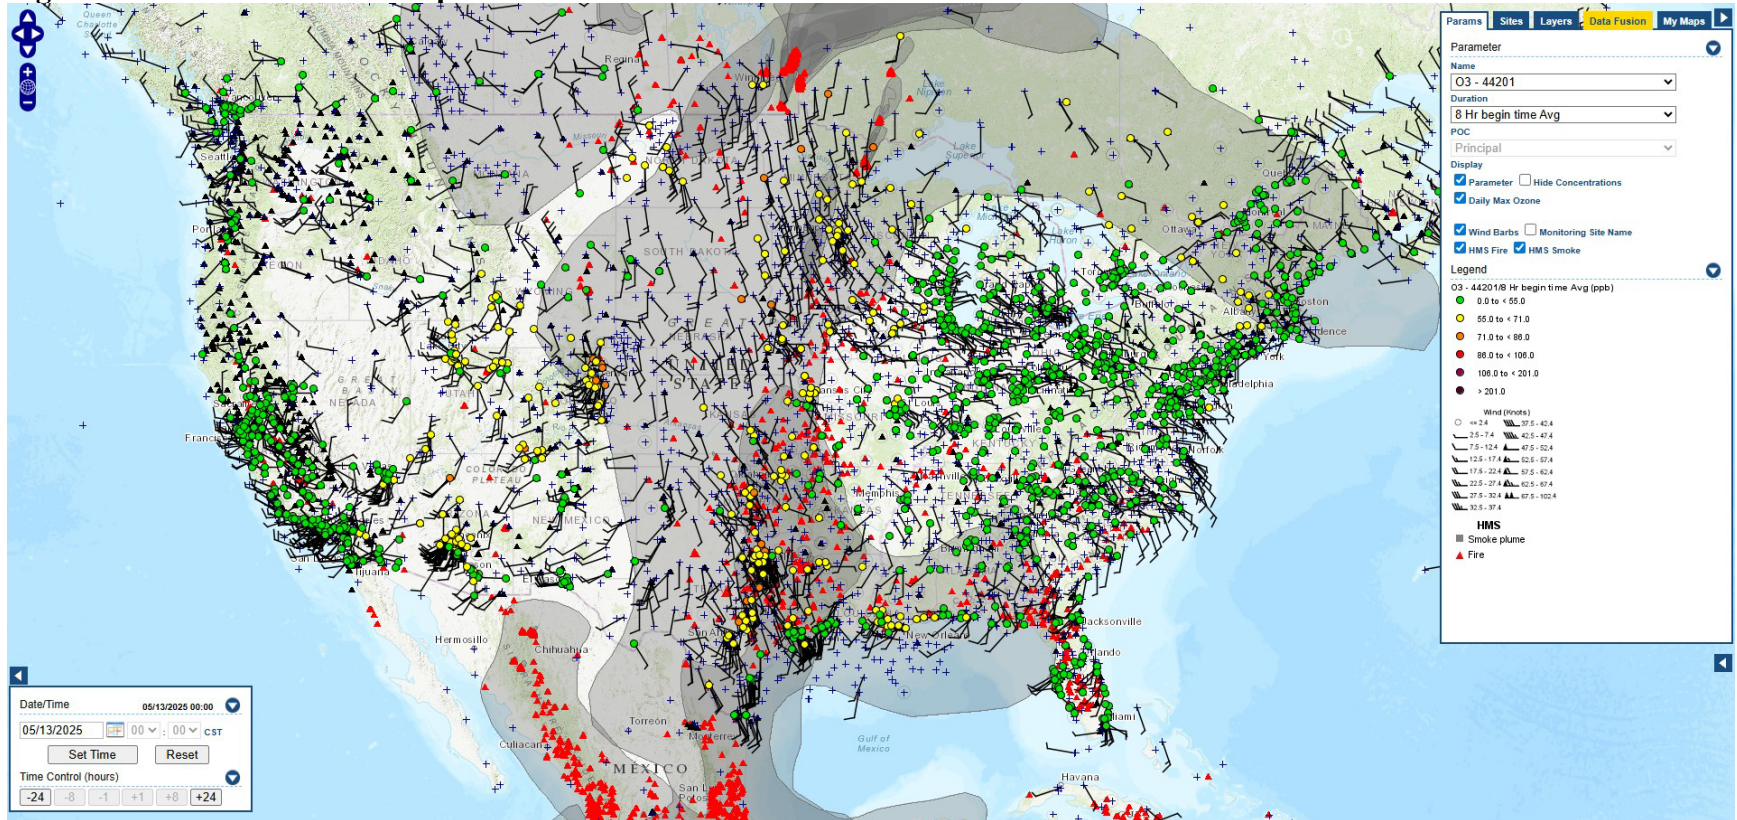

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-11 - AirNow Map for 05/31/25

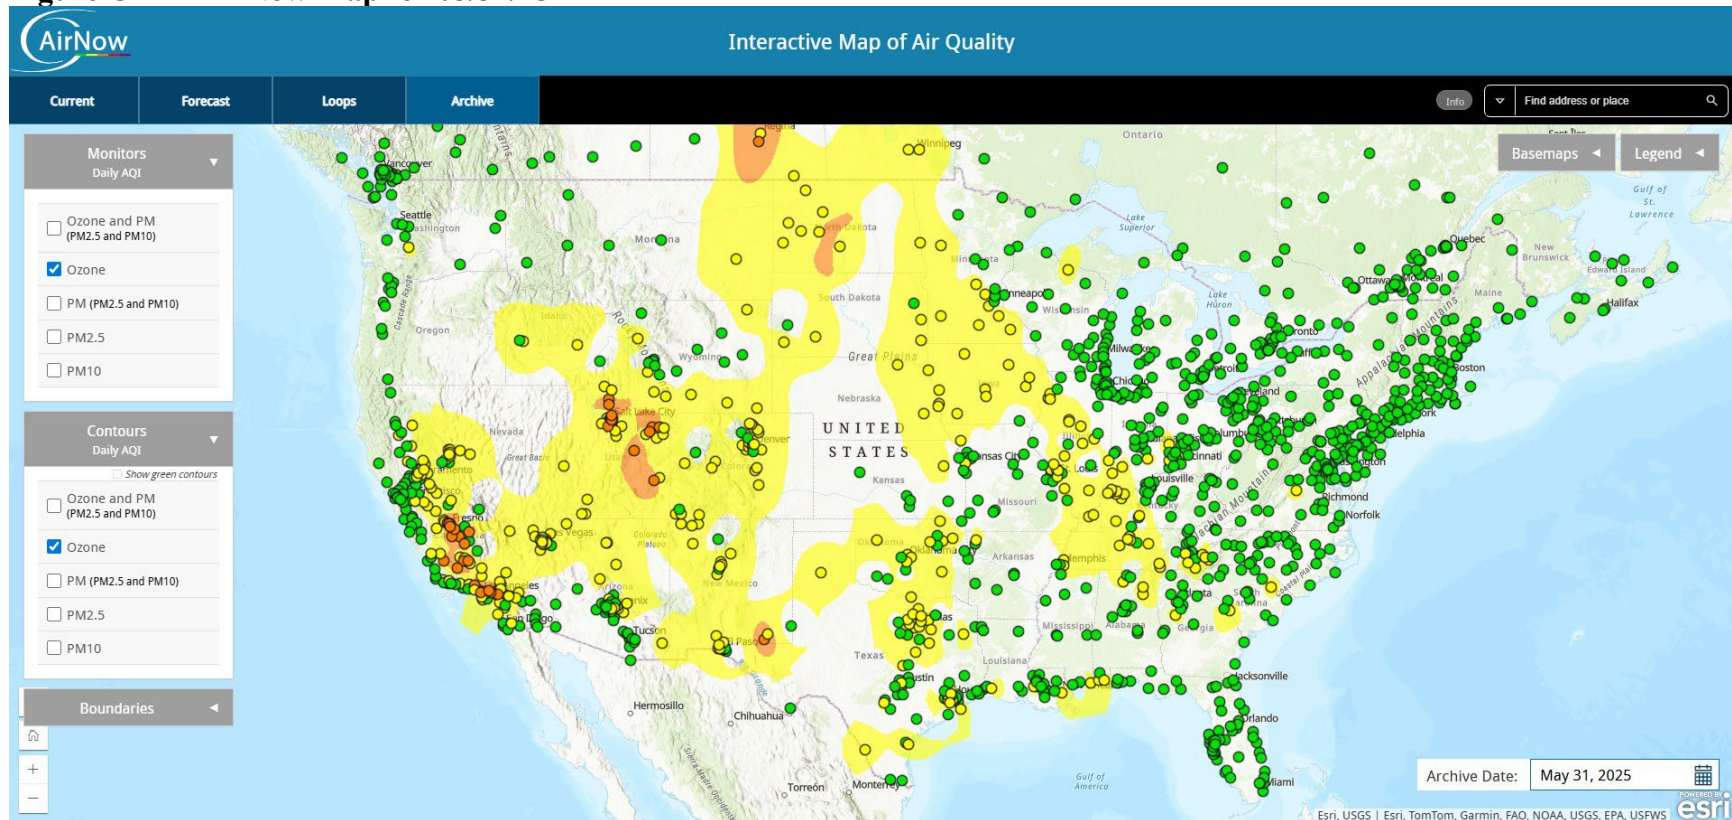

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-12 - AirNow Tech Map for 05/31/25

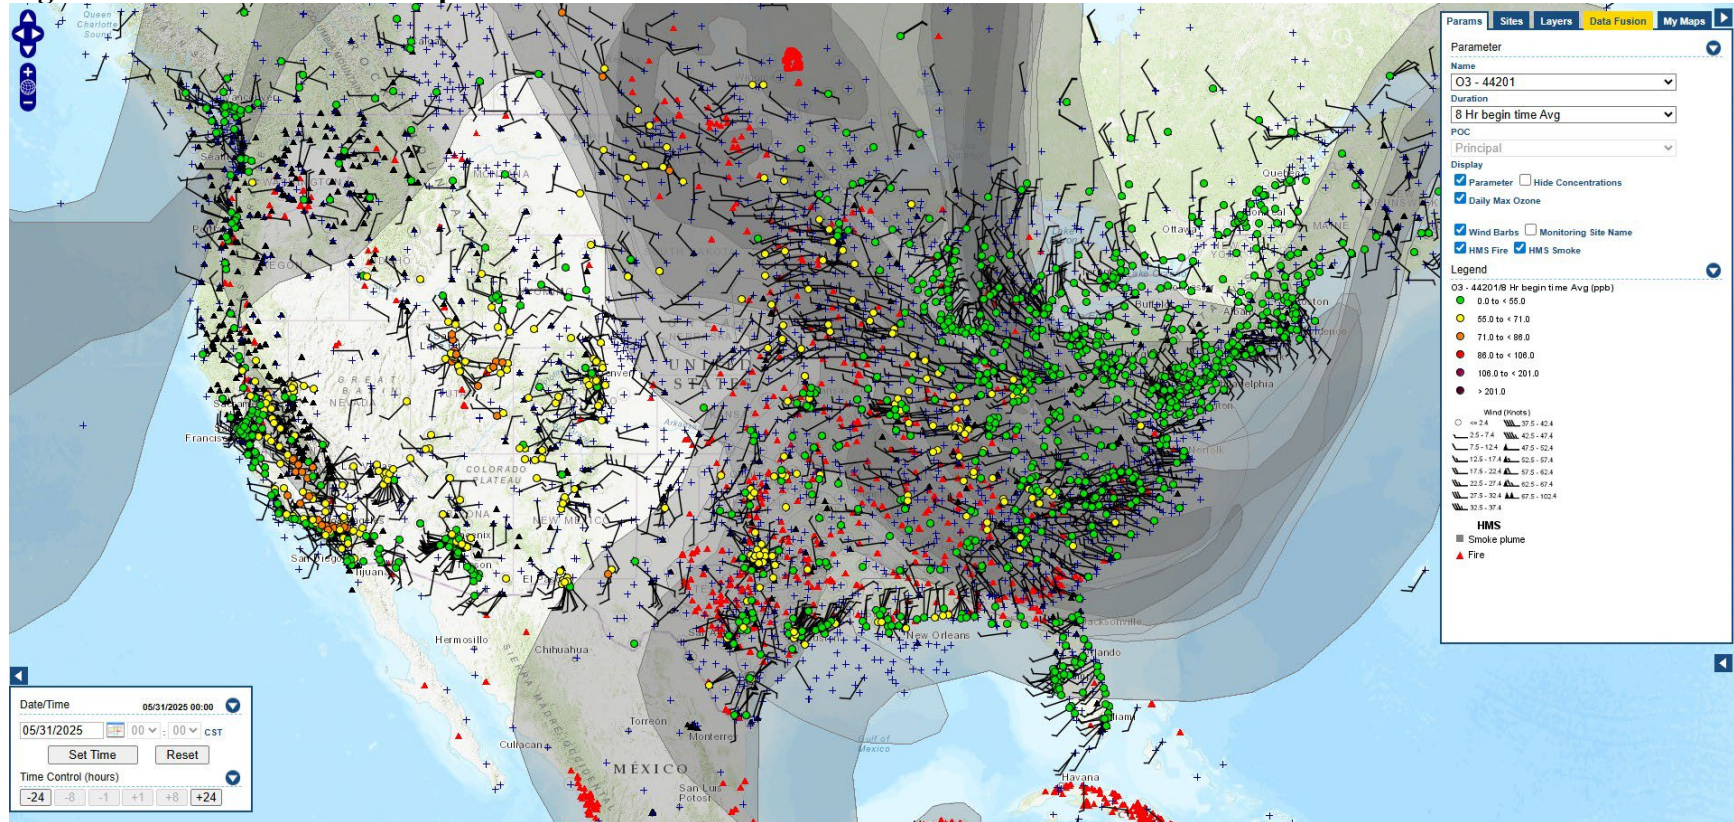

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-13 - AirNow Map for 06/01/25

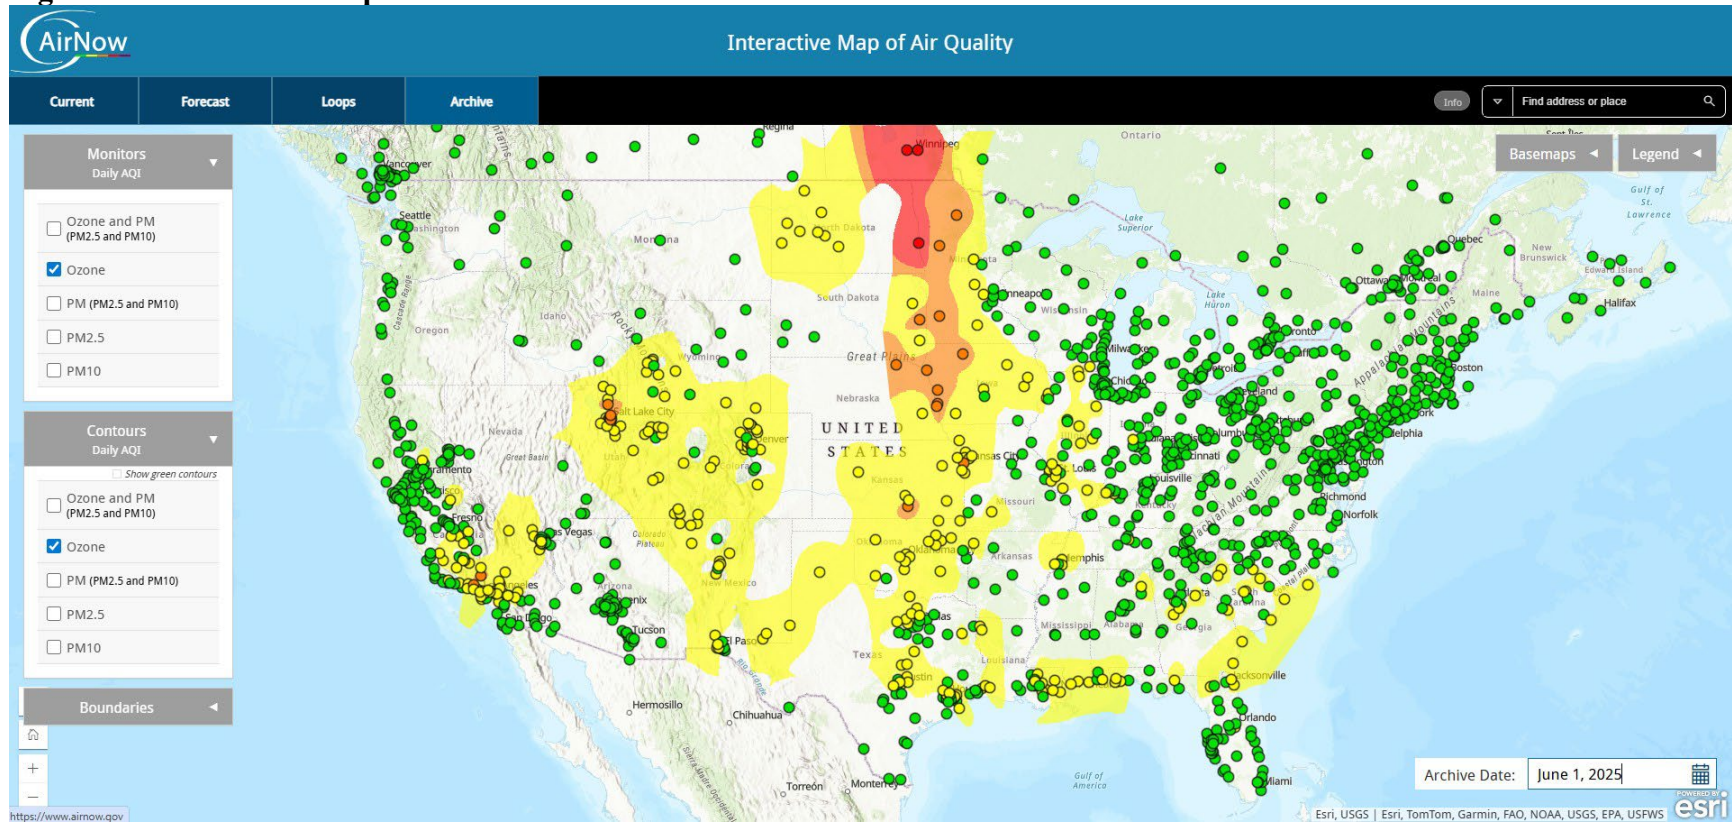

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-14 - AirNow Tech Map for 06/01/25

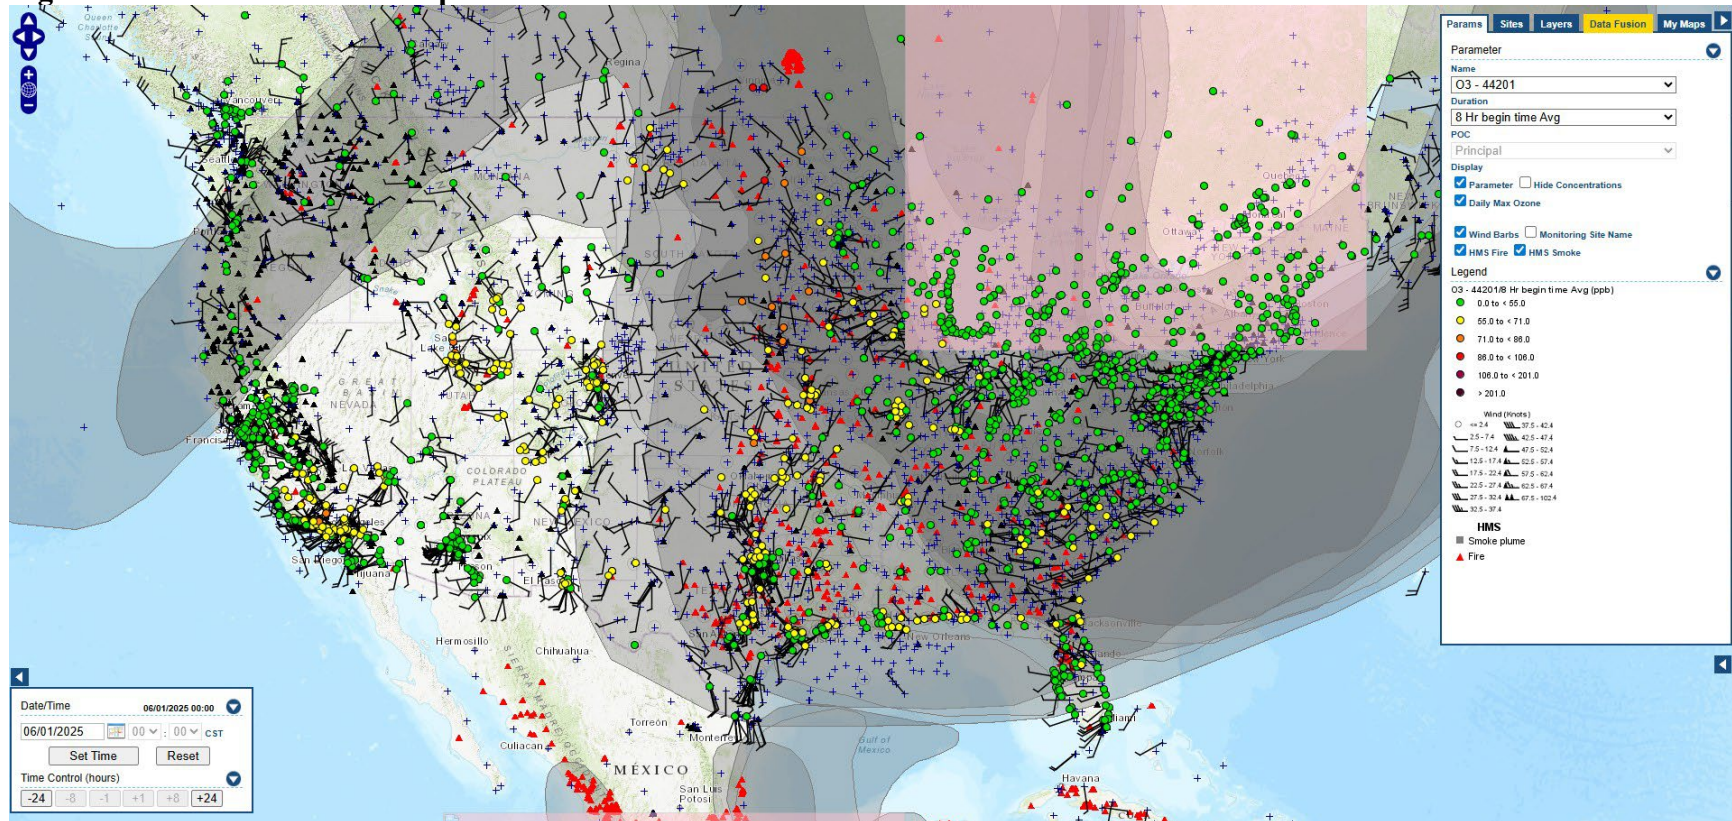

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-15 - AirNow Map for 06/02/25

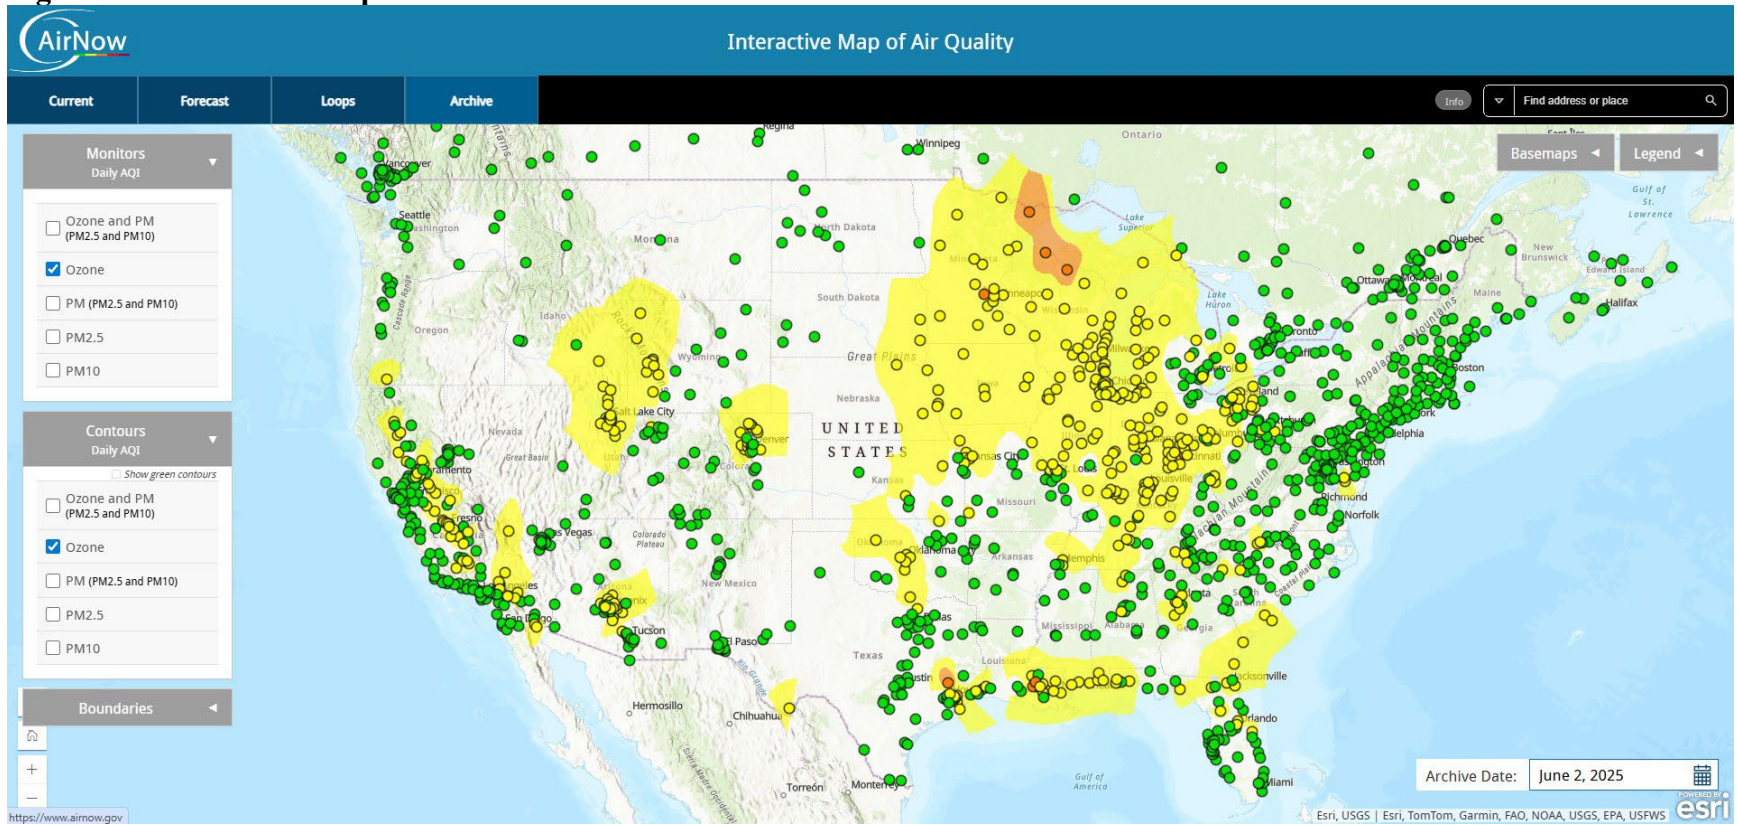

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-16 - AirNow Tech Map for 06/02/25

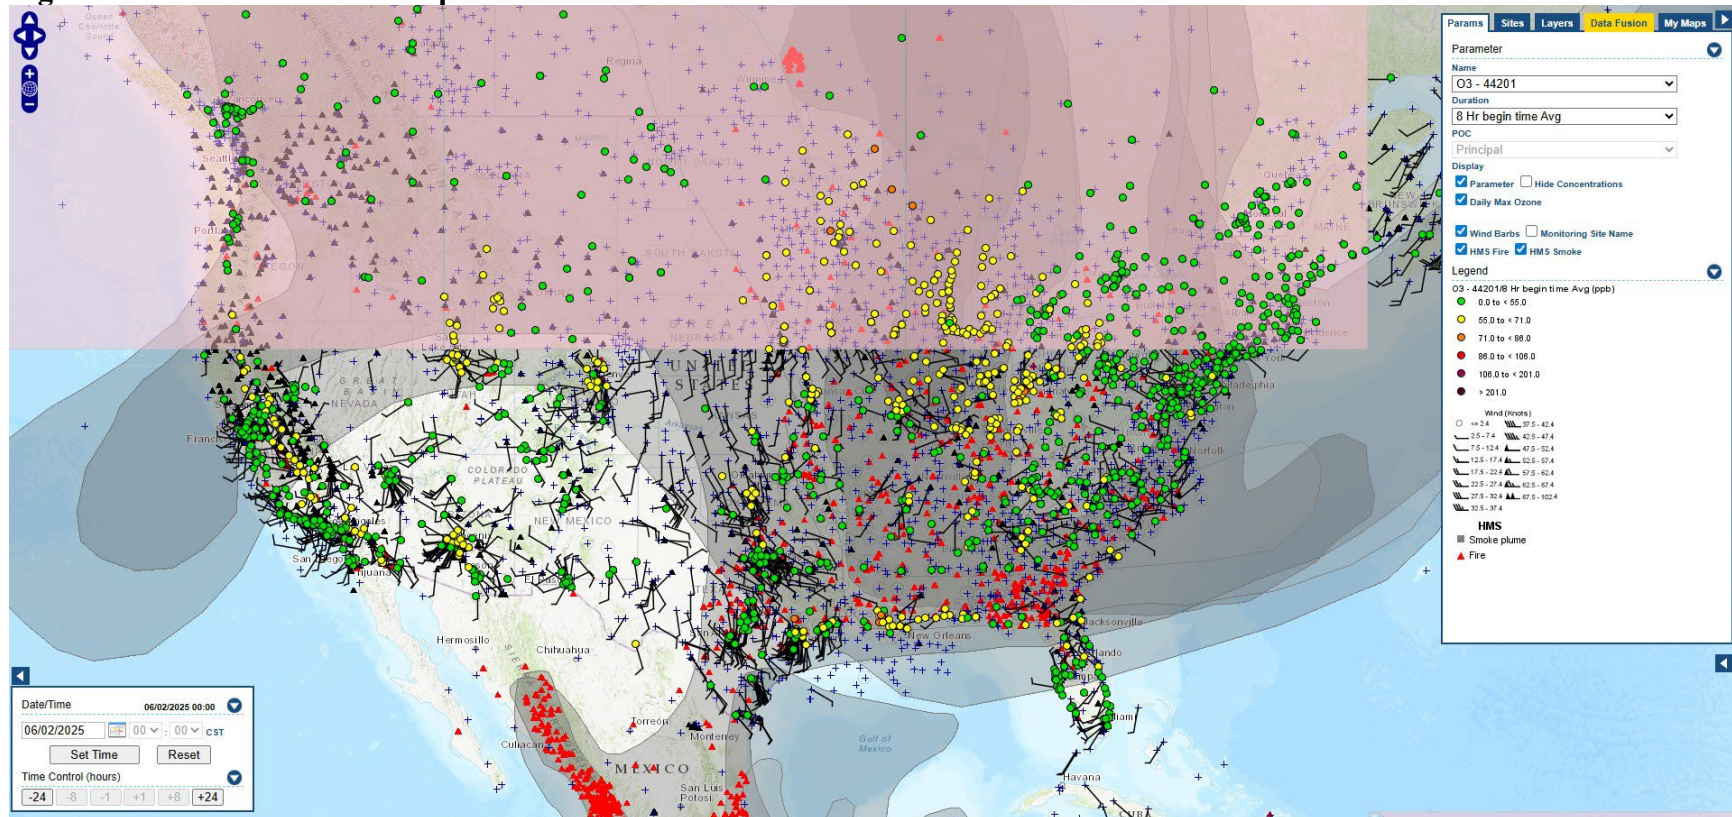

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-17 - AirNow Map for 06/11/25

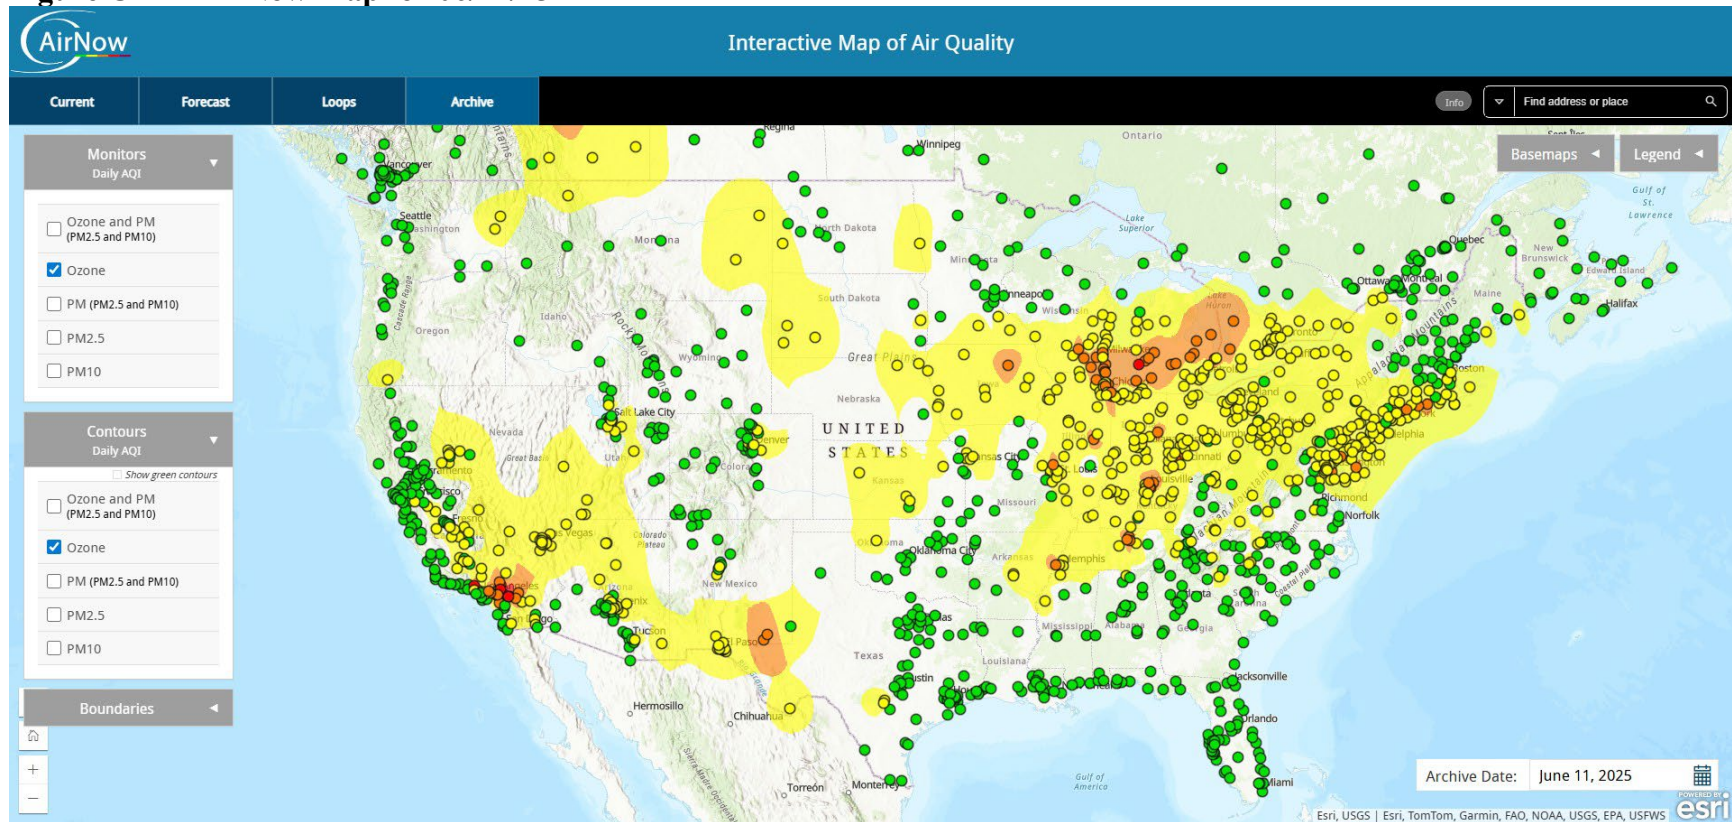

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-18 - AirNow Tech Map for 06/11/25

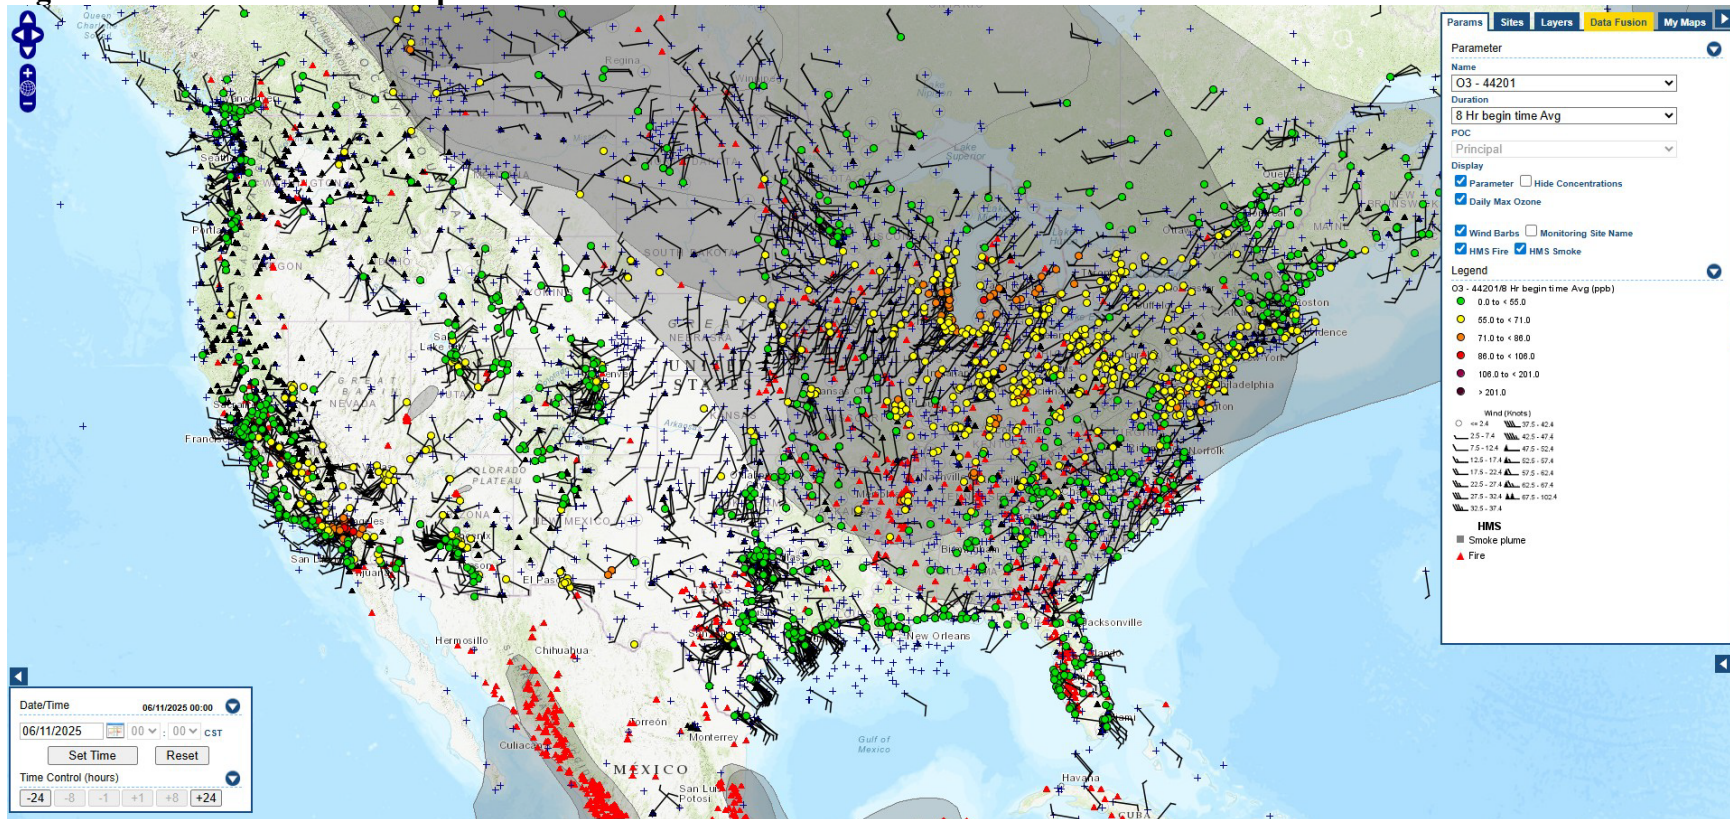

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-19 - AirNow Map for 06/18/25

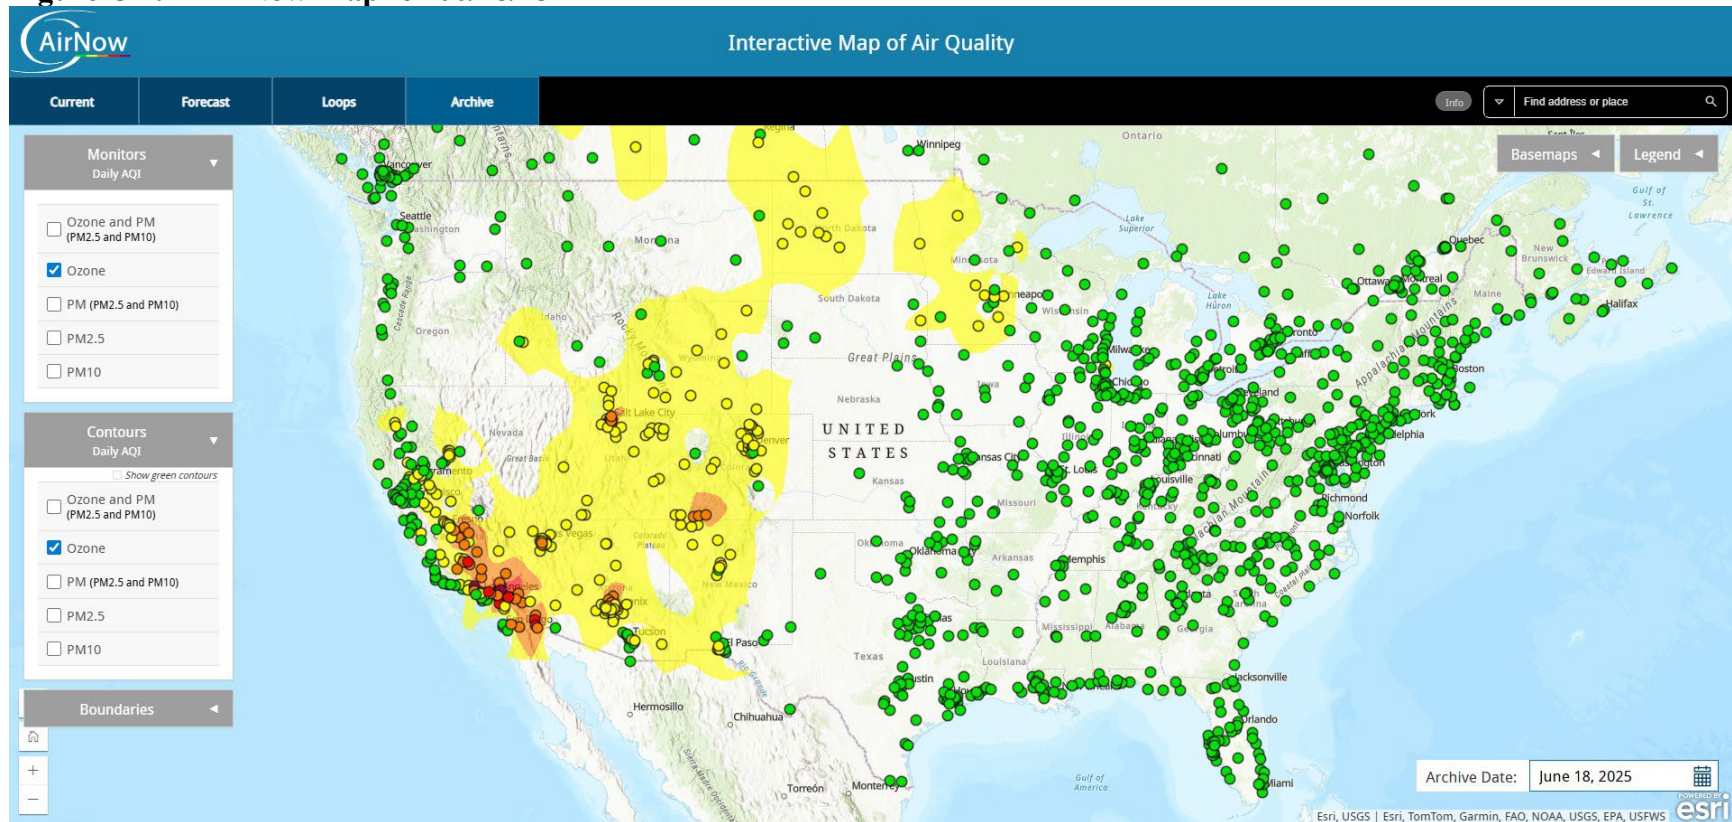

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-20 - AirNow Tech Map for 06/18/25

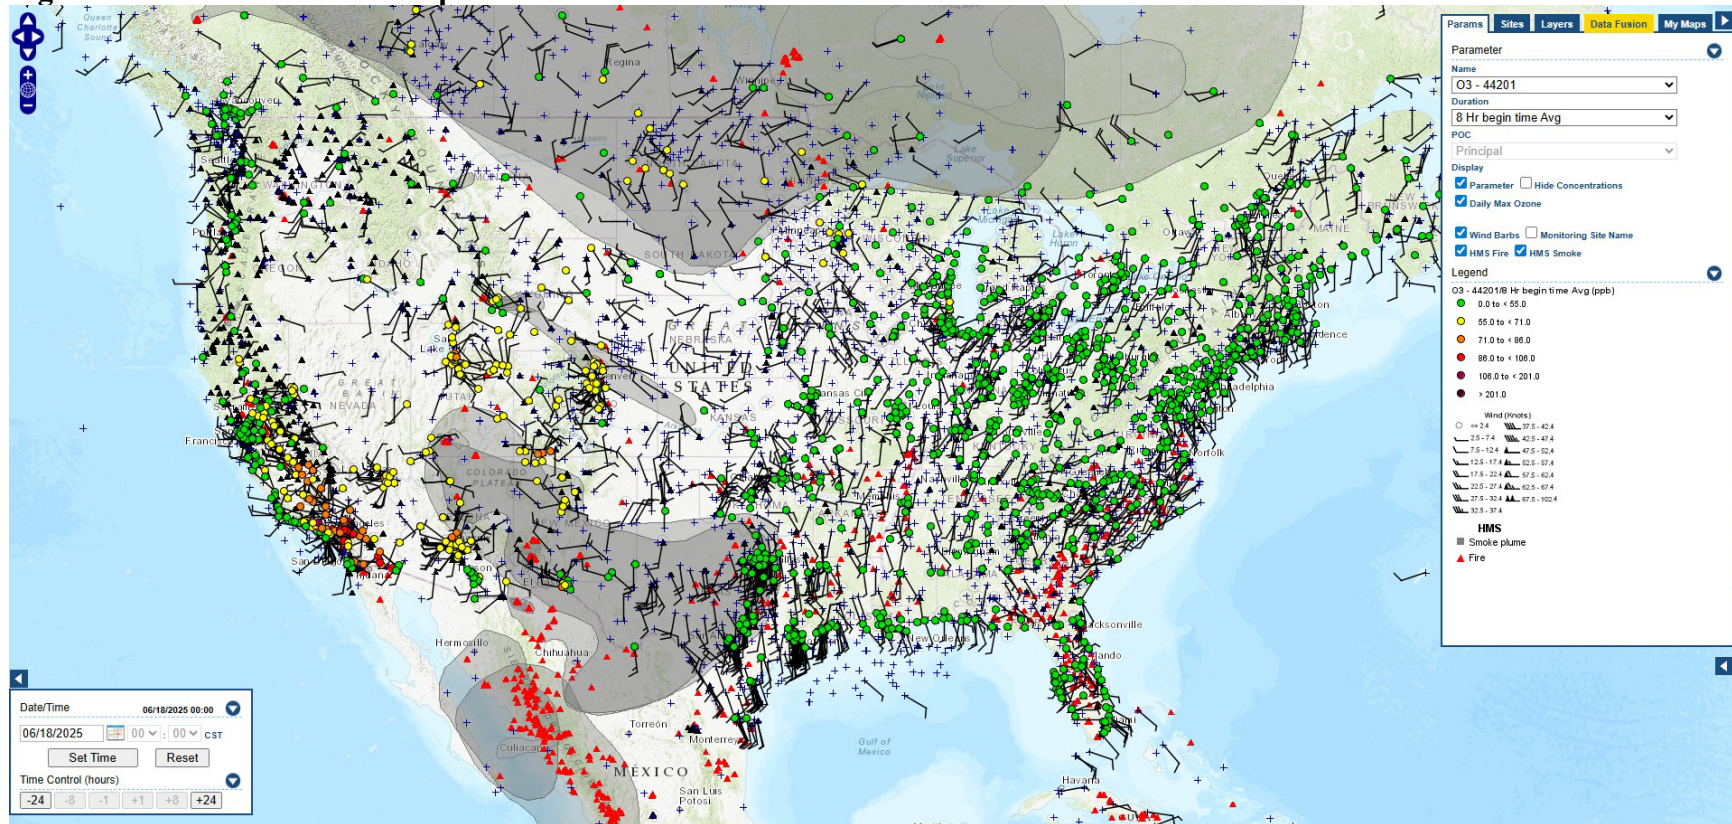

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-21 - AirNow Map for 06/19/25

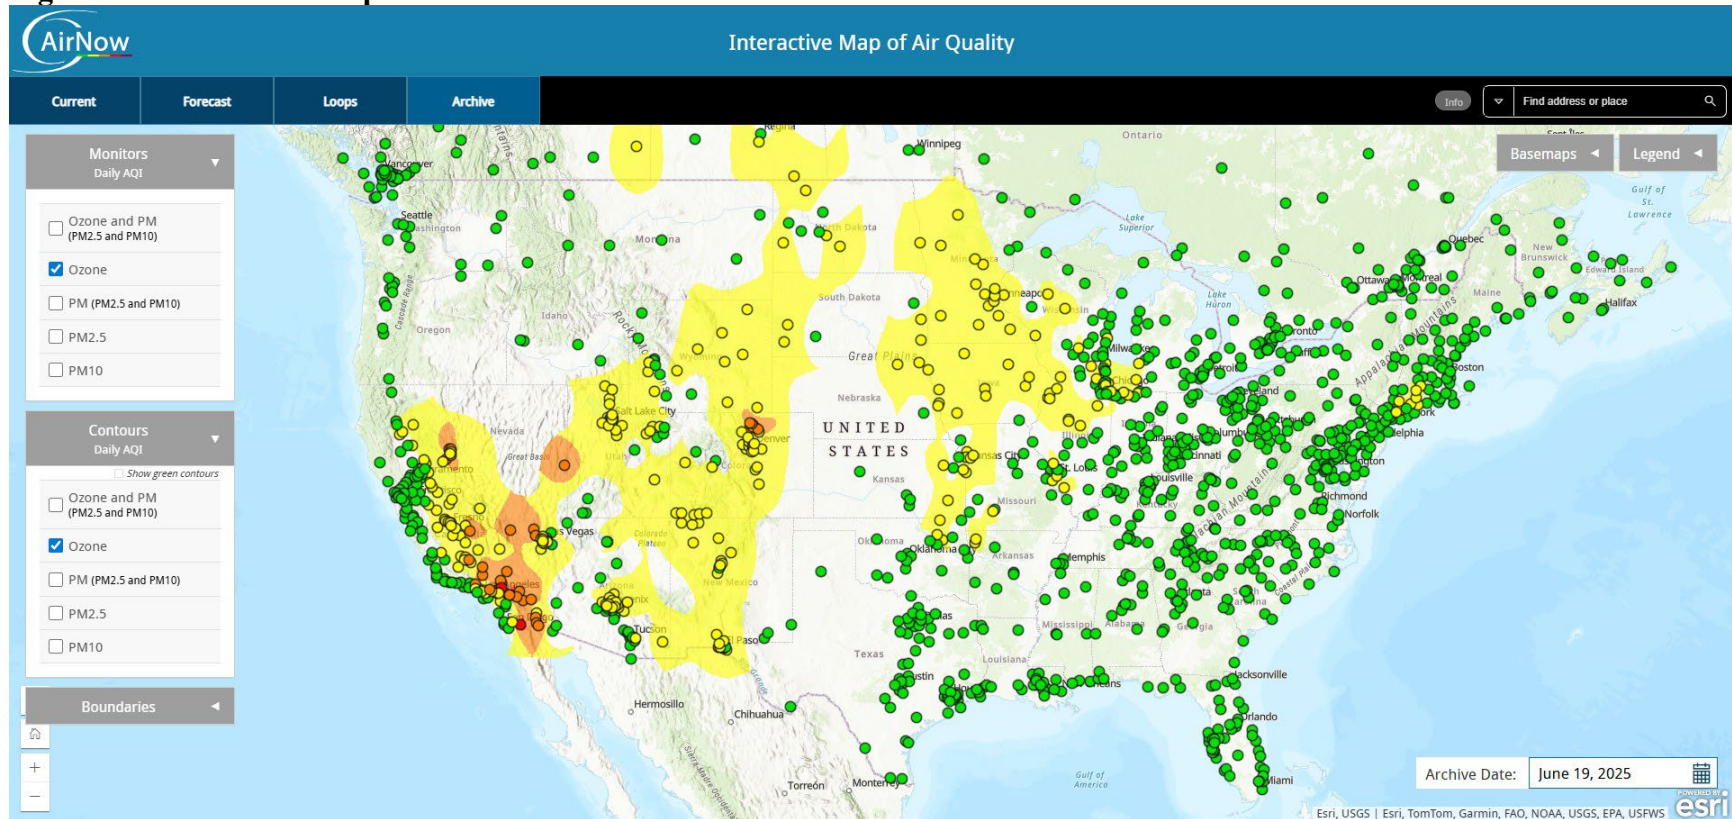

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-22 - AirNow Tech Map for 06/19/25

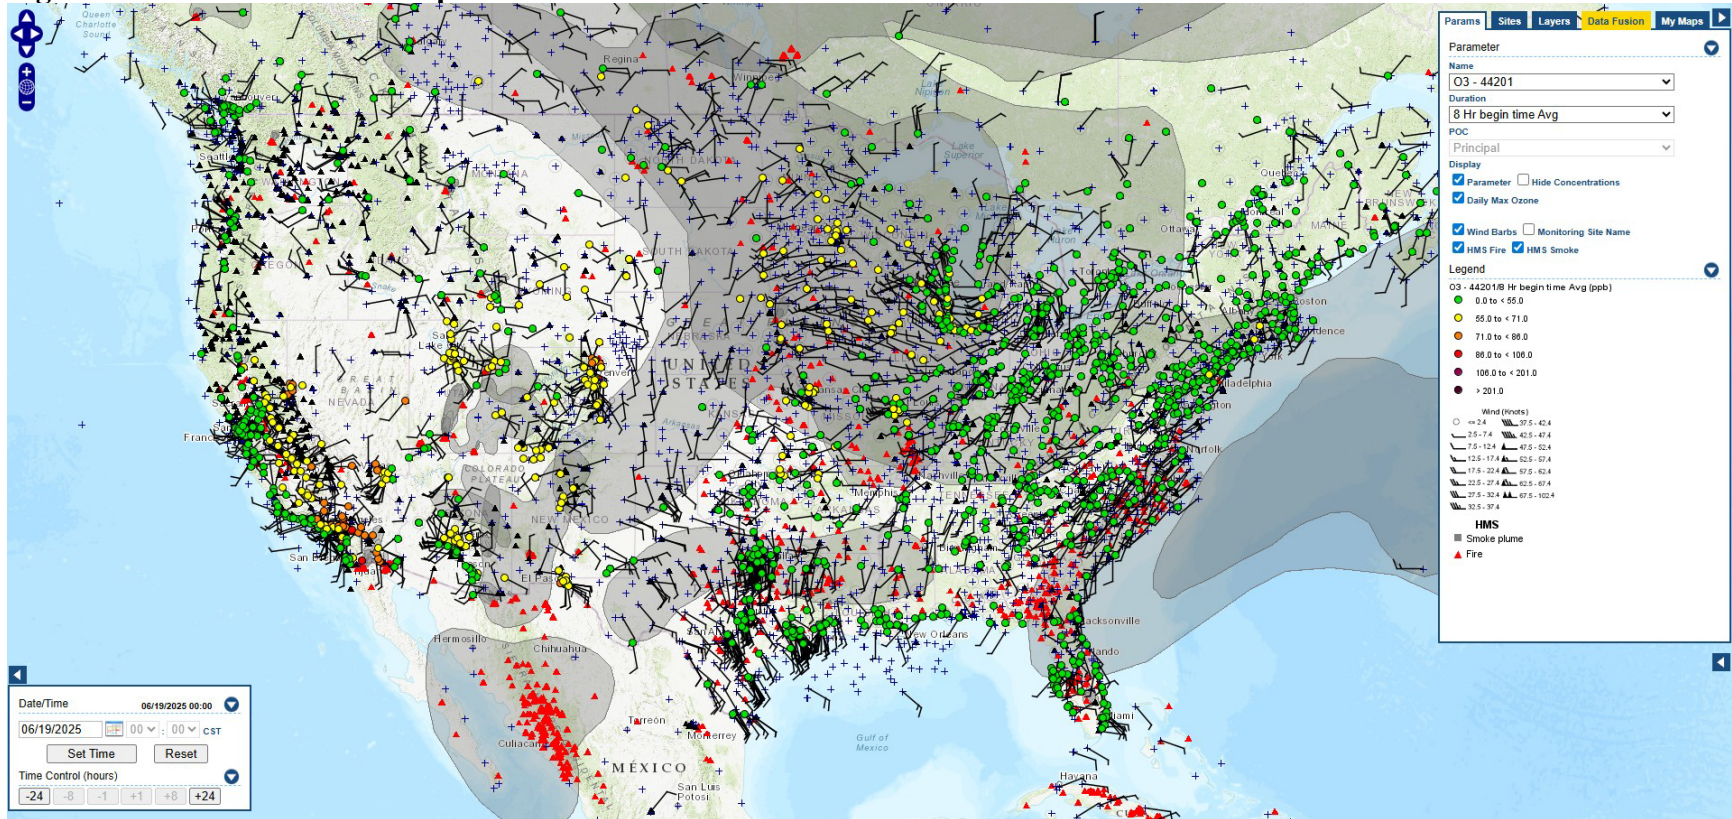

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-23 - AirNow Map for 06/20/25

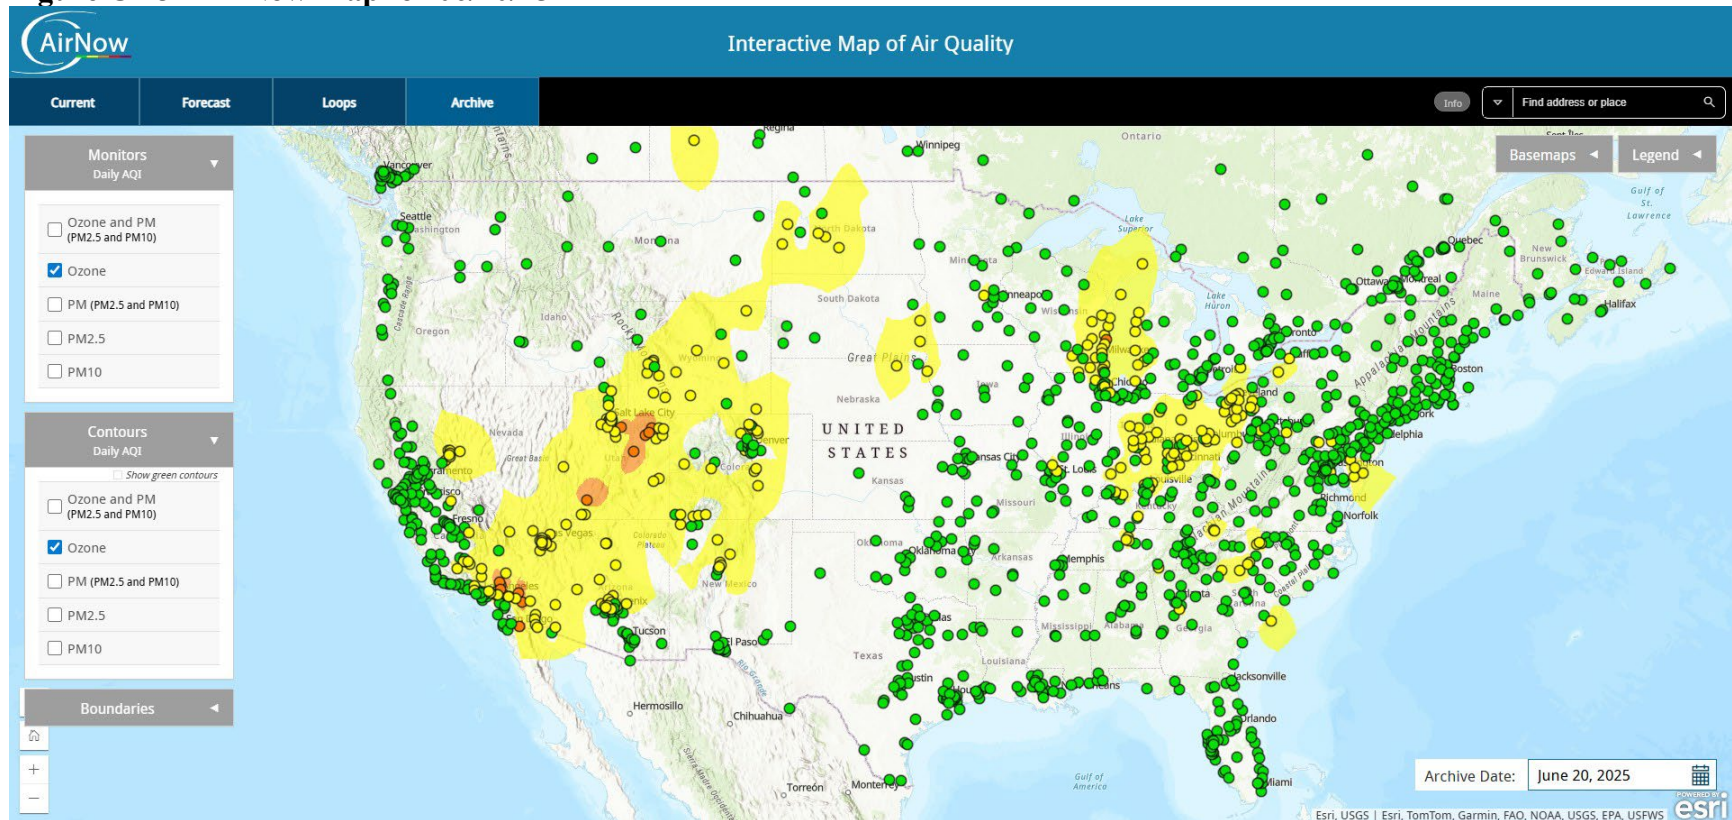

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-24 - AirNow Tech Map for 06/20/25

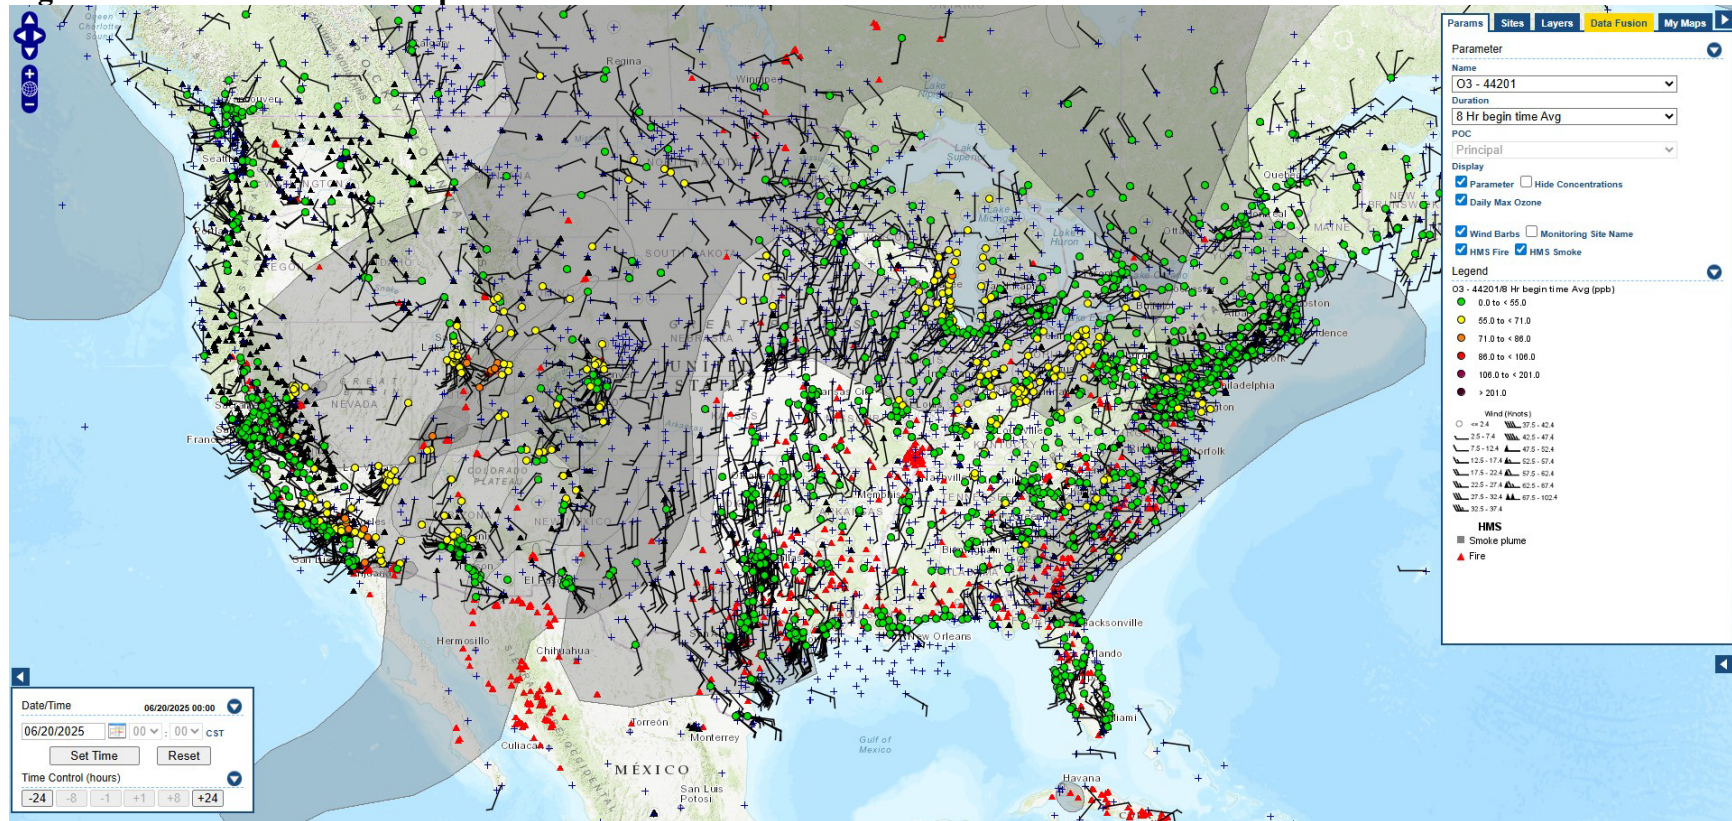

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-25 - AirNow Map for 06/21/25

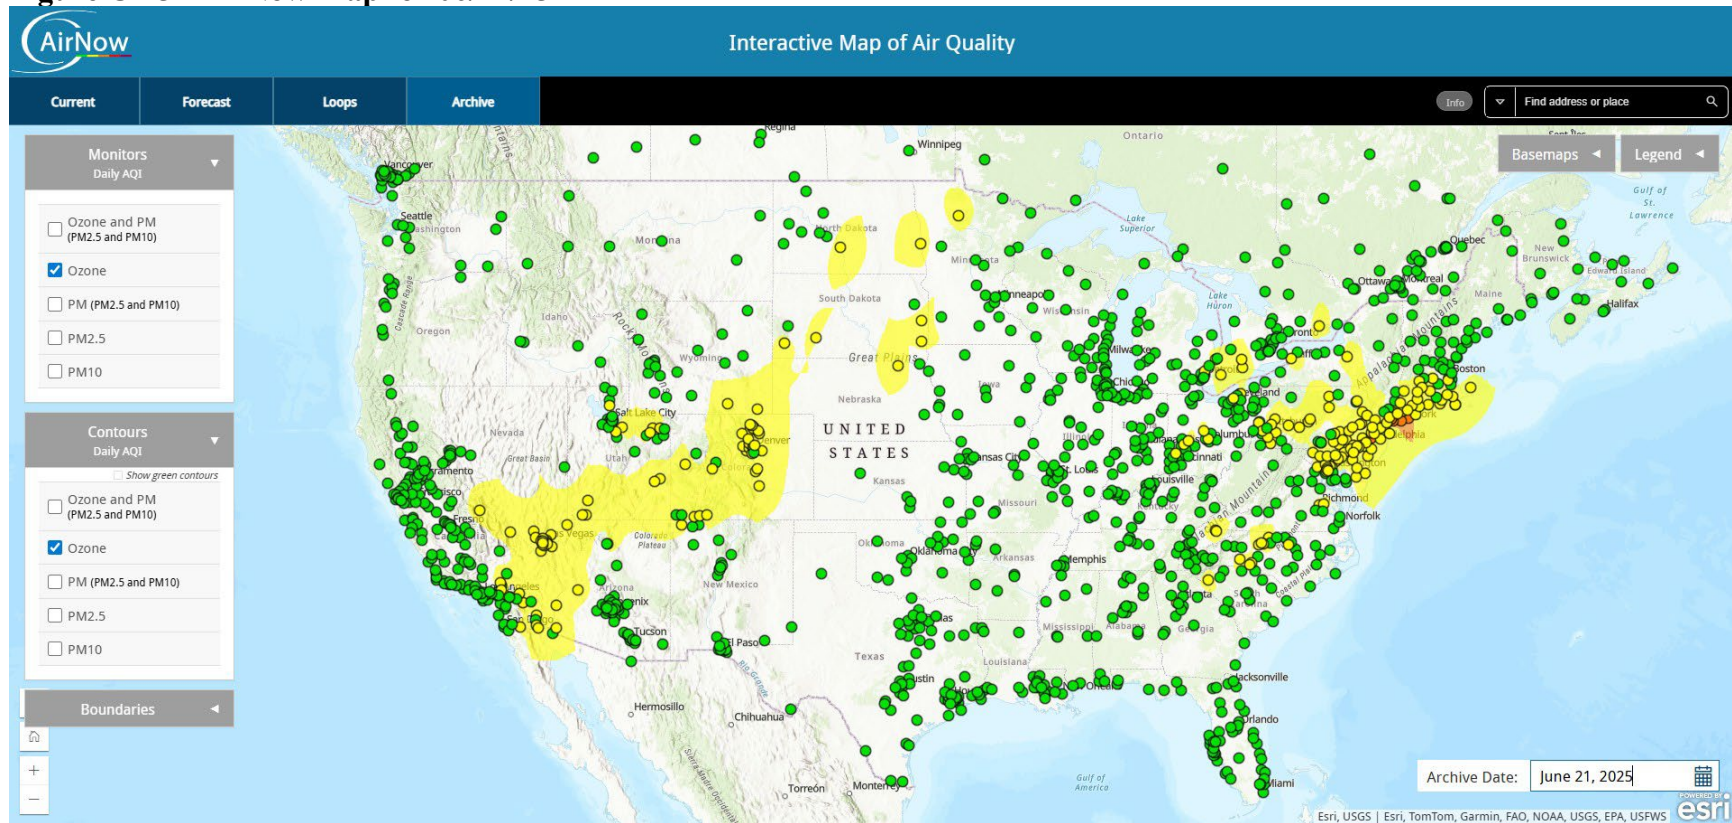

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-26 - AirNow Tech Map for 06/21/25

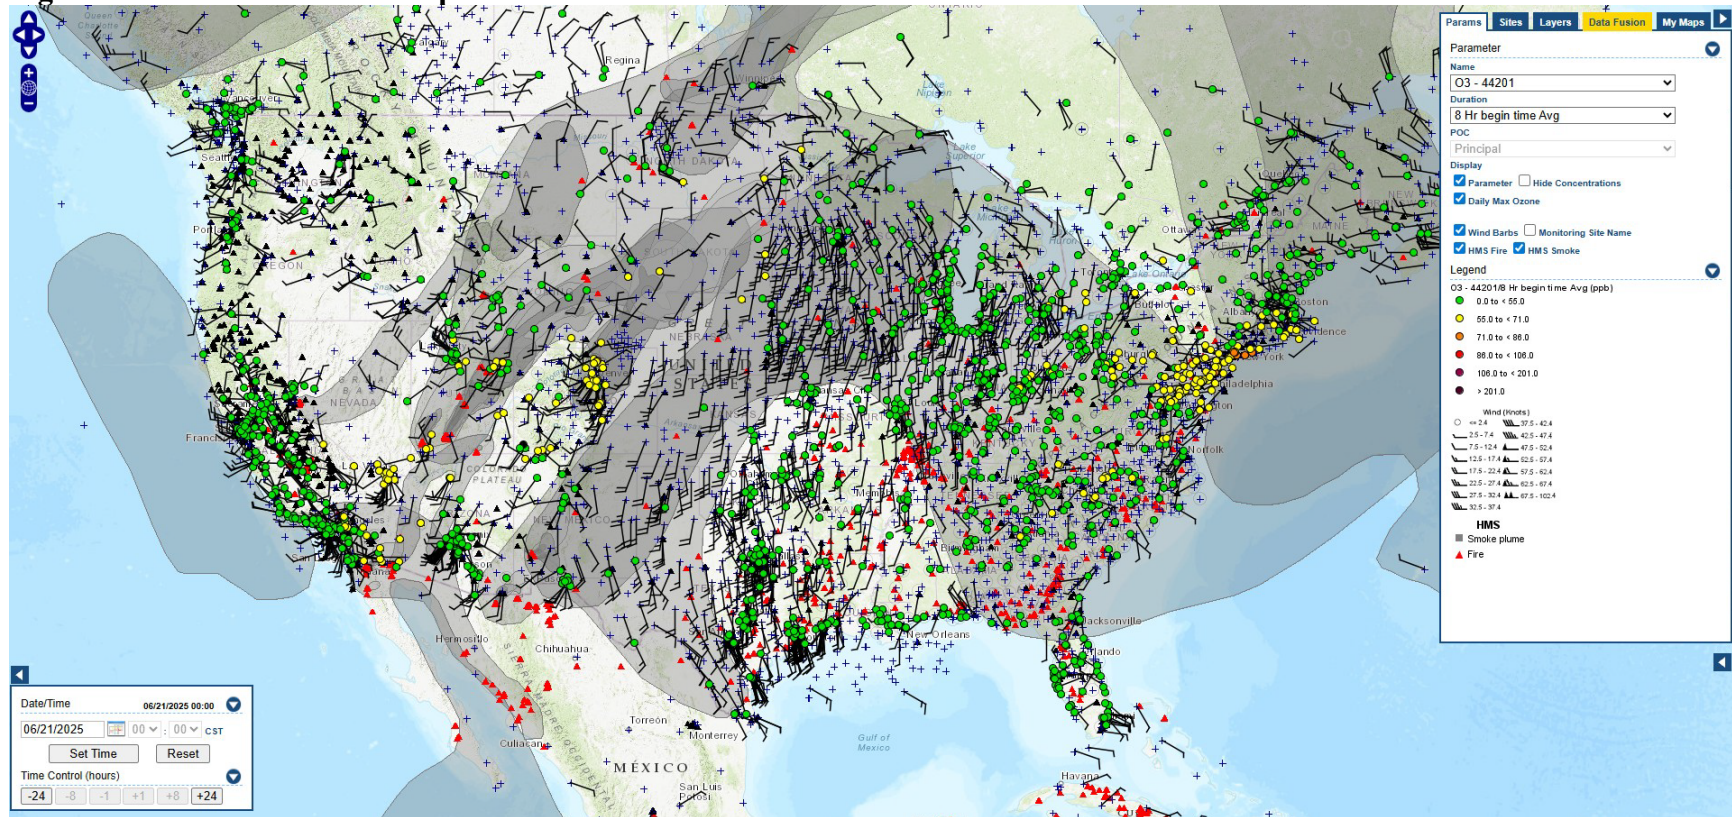

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days


Figure C-27 - AirNow Map for 09/25/25

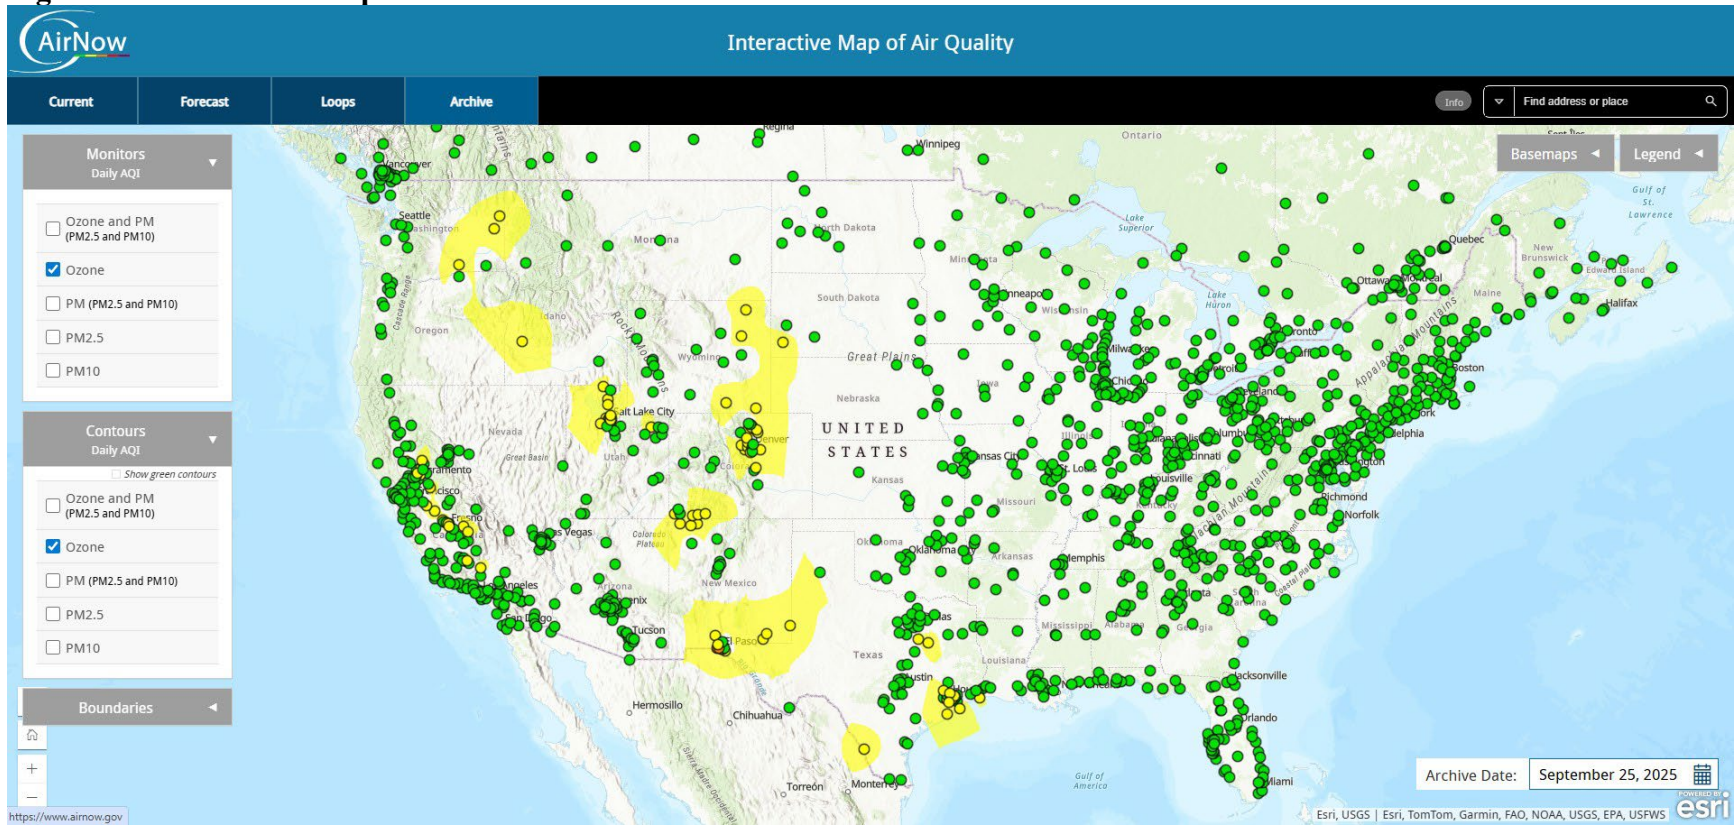

# Appendix C

## AirNow Maps for 8-hour Average Ozone High Concentration Days

Figure C-28 - AirNow Tech Map for 09/25/25

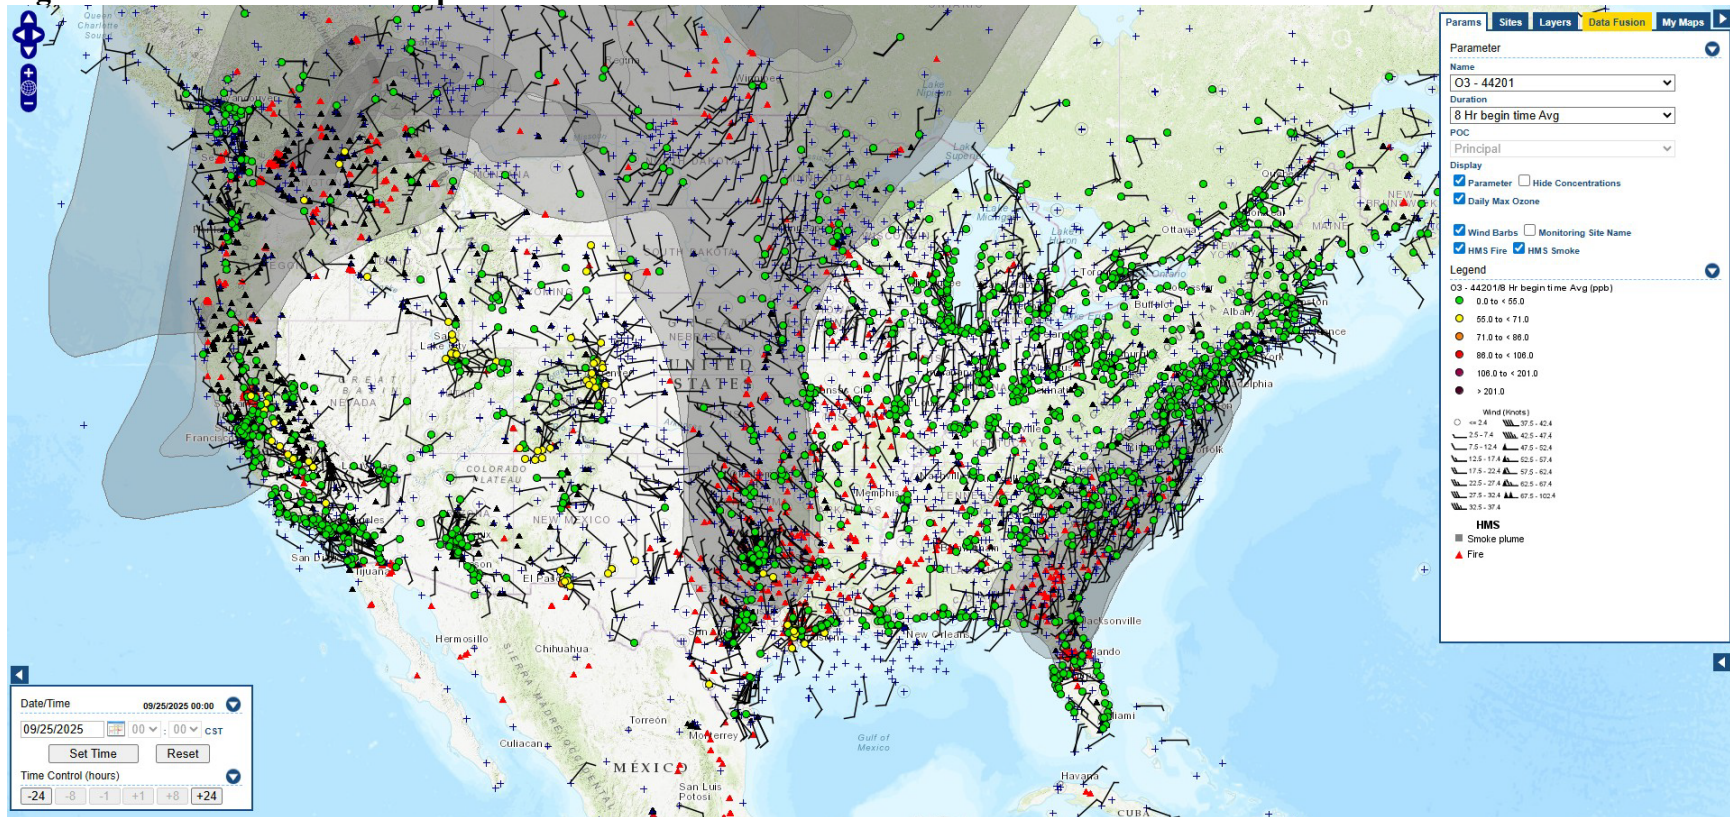

**Appendix D**  
**Public Comments and Response**

No public comments that were received during the 30-day comment period.