


SOUTH DAKOTA WATER WELL COMPLETION REPORT

07-92

Location NW 15N 29E
County Dewey Co.

North

Please mark well location with an "X"

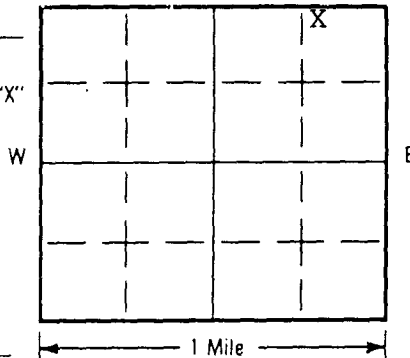

Well Completion Date

12-15-03

LOCATION:

Distance from nearest potential pollution source (septic tank, abandoned well, feed lot, etc.)? 2500 ft. from septic (identify source).

PROPOSED USE:

☒ Domestic/Stock ☐ Municipal ☐ Business ☐ Test Holes
☐ Irrigation ☐ Industrial ☐ Institutional ☐ Monitoring well

METHOD OF DRILLING:

Rotary

CASING DATA: ☐ Steel ☒ Plastic ☒ OtherIf other describe Copper

PIPEWEIGHT	DIAMETER	FROM	TO	HOLE DIAMETER
<u>80</u> LB/FT	<u>6</u> IN	<u>0</u> FT	<u>310</u> FT	<u>8</u> IN
<u>#K</u> LB/FT	<u>2</u> IN	<u>300</u> FT	<u>2280</u> FT	<u>4 1/2</u> IN
_____ LB/FT	_____ IN	_____ FT	_____ FT	_____ IN

GROUTING DATA

Grout Type	No. of Sacks	Grout Weight	From	To
<u>Portland</u>	<u>30</u>	_____ lb./gal	<u>0</u> ft	<u>300</u> ft
_____	_____	_____ lb./gal	_____ ft	_____ ft

Describe grouting procedure Pressure plugSCREEN: ☒ Perforated pipe ☐ ManufacturedDiameter 2 IN Length 105 FEETMaterial CopperSlot Size 3/8 Set From 2175 Feet to 2280 Feet

Other information _____

WAS A PACKER OR SEAL USED? ☒ YES ☐ NOIf so, what material? RubberDescribe packer(s) and location? Above perf

DISINFECTION: Was well disinfected upon completion?

_____ YES, How: _____

☒ NO, Why Not? flowing well

Laboratory sent to for water quality analysis

Pierre, SDWell Owner: Todd Ducheneaux

Business Name: _____

Address: Box 25Mobridge, SD 57601

WELL LOG:

FORMATION	DEPTH	
	FROM	TO
Shale	0	1470
Greenhorn	1470	1510
Shale	1510	1860
Dakota sand	1860	2030
Morrison	2030	2175
Sundance	2175	2280

STATIC WATER LEVEL _____ Feet

If flowing: closed in pressure 120 PS:GPM flow 75 through 2 inch pipeControlled by ☒ Valve ☐ Reducers ☐ Other _____Reduced Flowrate 15 GPMCan well be completely shut in? Yes

WELL TEST DATA:

☐ Pumped

Describe: _____

☐ Bailed☐ Other

Pumping Level Below Land Surface

_____ ft. After _____ Hrs. pumped _____ GPM

_____ ft. After _____ Hrs. pumped _____ GPM

If pump installed, pump rate _____ GPM

REMARKS

RECEIVED
DEC 29 2003This well was drilled under license # 94WATER RIGHTS
PROGRAM

And this report is true and accurate.

Drilling firm Huron Drilling Inc.

Signature of License Representative

Signature of Well Owner or Equitable Property Holder.

12-15-03

Date:

12-31-03