

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

RECEIVED
11-02

AUG 20 2007

WATER RIGHTS
PROGRAMLocation SE $\frac{1}{4}$ NE $\frac{1}{4}$ Sec 21 Twp 103N Rg 60W

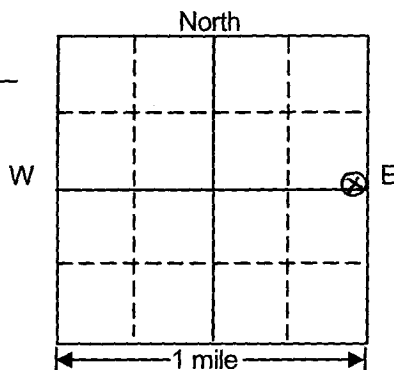
Well Owner:

Name: Coastal Mart, Inc.Address: 1001 Louisana StreetCity, State, Zip: Houston TX 77002

Comments:

Site is former Coastal Mart No. 1827
200 West 1st Avenue, Mitchell, SD
SDDENR File No. 93.242

Plugged Well is monitoring well MW-1

County
DavidsonPlease mark well
location with
an "X"Plugging Completion Date 7/11/2007

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐

Well depth 14 feet
Casing material PVC
Casing size(s) 2-inch diameter
Casing condition good

Hole depth _____
Hole size _____

Describe plugging procedure:

Pressure-grout well casing and screen using down-hole stinger, remove upper portion of casing and surface completion, and cap with concrete.

Describe grout or plugging material:

Enviroplug bentonite grout (30% solids)

Type of non-slip plug: concreteThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: *D. J. Aul*Signature of Well Owner: *Todd J. Muehlbauer*Date: 8-7-07

LOCATION MAP:



EnecoTech

ENVIRONMENTAL CONSULTANTS

3050 METRO DRIVE
SUITE 115
BLOOMINGTON, MN 55425

SEE SITE MAP

TEST HOLE/WELL LOG

PAGE 1 OF 1

TEST/WELL NUMBER:

MW-01

PROJECT:

COASTAL - MITCHELL, SD

DATE:

5/25/95

PROJECT NUMBER:

725-012

LOGGED BY:

JED

DRILLED BY:

BERGERSON CASWELL

ELEVATION:

1032.16(GR)

DETECTOR:

PID

CALIBRATED TO:

ISOBUTYLENE

BACKGROUND (PPM):

0.0

DRILLING METHOD:

HSA

SAMPLING METHOD:

SS

GRAVEL PACK:

RED FLINT #30

SEAL:

BENTONITE

GROUT:

CEMENT

CASING TYPE:

PVC

DIAMETER:

2"

LENGTH:

3'

HOLE DIA:

8"

DEPTH TO
LIQUID: N/A

SCREEN TYPE:

PVC

SLOT:

0.01"

DIAMETER:

2"

LENGTH:

10'

TOTAL DEPTH:

14'

DEPTH TO
WATER: N/A

SOIL/ROCK TYPE	COLOR	MOISTURE	PID READING		ODOR	SAMPLE TYPE	DEPTH	% RECOVERED	BLOW COUNTS	LITHOLOGY / REMARKS	WATER LEVEL: TIME:		WELL COMPLETION
			FIELD	HEAD - SPACE									
GM	BRN TO GRAY	DRY		0.1	NONE	HAND AUG.	0			6" ASPHALT GRAVEL FILL			
ML	BRN TO GRN	M		1.0	NONE	SS	5		3/2	SANDY SILT, BROWN TO GRAY, TRACE OF CLAY, SOME GRAVEL, DRY			
				3.0	NONE	SS			3/4				
									7/4				
	GRN BRN	DRY		53.0	STG	SS			4/7				
				1228.0	STG	SS	10		5/9	CLAYEY SILT, BROWN TO GREEN, SOME SAND, ORGANICS, HARD, DRY			
				239.0	STG	SS			6/10				
				12.0	SLT	SS			11/9	SANDY SILT, BROWN TO GREEN, SOME CLAY, SAND SEAMS INTERBEDDED, MOIST			
									10/11				
									5/5	SANDY SILT, GREEN TO BROWN, SOME CLAY, HARD			
									8/13				
									5/6				
									9/11				
							15			END OF BORING AT 14' BGS			
							20						

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

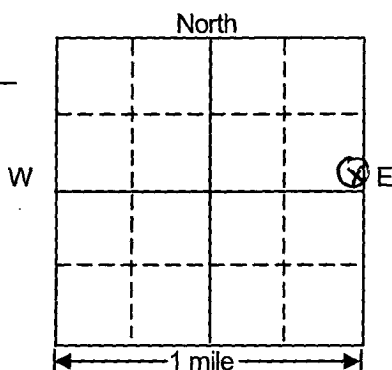
RECEIVED

Location SE $\frac{1}{4}$ NE $\frac{1}{4}$ Sec 21 Twp 103N Rg 60W

Well Owner:

AUG 20 2007

County

DavidsonPlease mark well
location with
an "X"

Name:

Coastal Mart, Inc.WATER RIGHTS
PROGRAM

Address:

1001 Louisana StreetCity, State, Zip: Houston

TX

77002

Comments:

Site is former Coastal Mart No. 1827
200 West 1st Avenue, Mitchell, SD
SDDENR File No. 93.242

Plugged Well is monitoring well MW-3

Plugging Completion Date 7/11/2007

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 14 feetCasing material PVCCasing size(s) 2-inch diameterCasing condition good

Hole depth _____

Hole size _____

Describe plugging procedure:

Pressure-grout well casing and screen using down-hole stinger, remove upper portion of casing and surface completion, and cap with concrete.

Describe grout or plugging material:

Enviroplug bentonite grout (30% solids)

Type of non-slip plug: concrete/top soilThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: D. J. AlSignature of Well Owner: Todd J. MunkhofDate: 8-7-07

LOCATION MAP:


EnecoTech
 ENVIRONMENTAL CONSULTANTS

 3050 METRO DRIVE
 SUITE 115
 BLOOMINGTON, MN 55425

SEE SITE MAP

TEST HOLE/WELL LOG

PAGE 1 OF 1

TEST/WELL NUMBER:

MW-03

PROJECT:

COASTAL - MITCHELL, SD

DATE:

5/23/95

PROJECT NUMBER:

725-012

LOGGED BY:

JED

DRILLED BY:

BERGERSON CASWELL

ELEVATION:

1301.53(GR)

DETECTOR:

PID

CALIBRATED TO:

ISOBUTYLENE

BACKGROUND (PPM):

0.0

DRILLING METHOD:

HSA

SAMPLING METHOD:

SS

GRAVEL PACK:

RED FLINT #30

SEAL:

BENTONITE

GROUT:

CEMENT

CASING TYPE:

PVC

DIAMETER:

2"

LENGTH:

3'

HOLE DIA:

8"

DEPTH TO LIQUID:

7'

SCREEN TYPE:

PVC

SLOT:

0.01"

DIAMETER:

2"

LENGTH:

10'

TOTAL DEPTH:

14'

DEPTH TO WATER:

7'

SOIL/ROCK TYPE	COLOR	MOISTURE	PID READING		ODOR	SAMPLE TYPE	DEPTH	% RECOVERED	BLOW COUNTS	LITHOLOGY / REMARKS	WATER LEVEL: TIME:		WELL COMPLETION
			FIELD	HEAD - SPACE									
ML	BRN	M		0.0	NONE	SS	0		4/4	SANDY SILT, BROWN, GRAVEL, FILL, MOIST			
	DRK BRN			0.0	NONE	SS			4/4	SANDY SILT, DARK BROWN, SOME CLAY, SOFT, MOIST			
SP	BRN	S		0.0	NONE	SS	5		2/2	SAND, FINE TO MED., BROWN, TRACE SILT, MOIST			
	GRY TO BRN			0.0	NONE	SS			3/4	SAND, FINE TO MED., BROWN, TRACE SILT, MOIST			
	BRN			0.0	NONE	SS			5/4	SAND, FINE TO MED., BROWN, TRACE SILT, MOIST			
ML	GRAY	D		0.0	NONE	SS	10		6/5	SAA, GREEN-BROWN, SATURATED AT 7'			
				0.0	NONE	SS			5/4	SAA, GREEN-BROWN, SATURATED AT 7'			
				0.0	NONE	SS			4/6	SAA, GRAVEL			
				3.0	NONE	SS			4/3	SANDY SILT, BROWN, SOME CLAY, HARD, MOIST			
				0.0	NONE	SS			4/6	SANDY SILT, BROWN, SOME CLAY, HARD, MOIST			
				3.0	NONE	SS			3/4	SANDY SILT, GRAY, SOME CLAY, HARD, DRY			
				0.0	NONE	SS			4/5				
									4/3				
									4/5				
							15			END OF BORING AT 14' BGS			

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT **RECEIVED**

AUG 20 2007

WATER RIGHTS
PROGRAMLocation SE 1/4 NE 1/4 Sec 21 Twp 103N Rg 60W

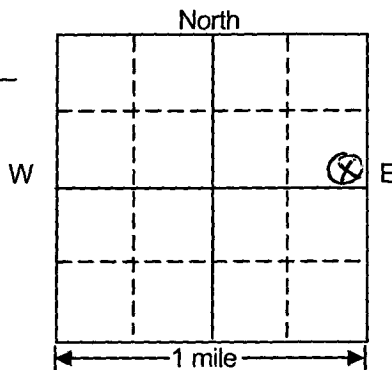
Well Owner:

Name: Coastal Mart, Inc.Address: 1001 Louisana StreetCity, State, Zip: Houston TX 77002

Comments:

Site is former Coastal Mart No. 1827
200 West 1st Avenue, Mitchell, SD
SDDENR File No. 93.242

Plugged Well is monitoring well MW-4

County
DavidsonPlease mark well
location with
an "X"Plugging Completion Date 7/11/2007

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐

Well depth 14 feet
Casing material PVC
Casing size(s) 2-inch diameter
Casing condition good

Hole depth _____
Hole size _____

Describe plugging procedure:

Pressure-grout well casing and screen using down-hole stinger, remove upper portion of casing and surface completion, and cap with concrete.

Describe grout or plugging material:

Enviroplug bentonite grout (30% solids)

Type of non-slip plug: concrete/gravelThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: D. J. AulSignature of Well Owner: Todd J. MunkhofDate: 8-7-07

8-27-07

LOCATION MAP:


EnecoTech
 ENVIRONMENTAL CONSULTANTS

 3050 METRO DRIVE
 SUITE 115
 BLOOMINGTON, MN 5542

SEE SITE MAP

TEST HOLE/WELL LOG

PAGE 1 OF 1

TEST/WELL NUMBER:	MW-04	PROJECT:	COASTAL - MITCHELL, SD
DATE:	5/24/95	PROJECT NUMBER:	725-012
LOGGED BY:	JED	DRILLED BY:	BERGERSON CASWELL

ELEVATION: 1301.19(GR)	DETECTOR: PID	CALIBRATED TO: ISOBUTYLENE	BACKGROUND (PPM): 0.0	DRILLING METHOD: HSA	SAMPLING METHOD: SS
GRAVEL PACK: RED FLINT #30	SEAL: BENTONITE			GROUT: CEMENT	
CASING TYPE: PVC	DIAMETER: 2"		LENGTH: 3'	HOLE DIA: 8"	DEPTH TO LIQUID: 8'
SCREEN TYPE: PVC	SLOT: 0.01"		DIAMETER: 2"	LENGTH: 10'	TOTAL DEPTH: 14'
					DEPTH TO WATER: 8'

SOIL/ROCK TYPE	COLOR	MOISTURE	PID READING		ODOR	SAMPLE TYPE	DEPTH	% RECOVERED	BLOW COUNTS	LITHOLOGY / REMARKS	WATER LEVEL: TIME:		WELL COMPLETION
			FIELD	HEAD - SPACE									
SP	BR						0		16/10	6" SAND AND GRAVEL MIX			
ML	BLK	D		0.0	NONE	SS			8/8	SANDY SILT, BLACK, SOME CLAY, HARD, DRY			
				0.0	NONE	SS			2/3				
	DRK BRN	M		0.0	NONE	SS	5		3/8	SAA, MOIST			
SM	GRN TO BRN	W		0.0	NONE	SS			4/7				
				0.0	NONE	SS			10/10	SILTY SAND, GREEN-BROWN, SOFT, WET			
				0.7	NONE	SS			6/7	SAA, SOME GRAVEL			
ML	GRAY	M		14.0	SLT	SS	10		8/8	SAA, GRAY, MOIST			
				0.0	NONE	SS			4/4	SANDY SILT, SOME CLAY, FIRM, MOIST			
		D		0.0	NONE	SS			20/25	SAA, HARD, DRY			
							15		6/9				
							20		11/10				
										END OF BORING AT 14' BGS			

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

RECEIVED
11-02

AUG 20 2007

WATER RIGHTS
PROGRAMLocation SE 1/4 NE 1/4 Sec 21 Twp 103N Rg 60W

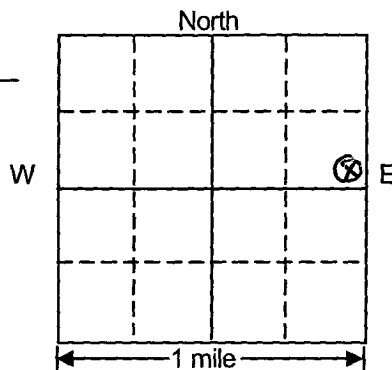
Well Owner:

County
DavidsonName: Coastal Mart, Inc.Address: 1001 Louisiana StreetCity, State, Zip: Houston TX 77002

Comments:

Site is former Coastal Mart No. 1827
200 West 1st Avenue, Mitchell, SD
SDDENR File No. 93.242

Plugged Well is monitoring well MW-5

Please mark well
location with
an "X"Plugging Completion Date 7/11/2007

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐

Well depth 14 feet
Casing material PVC
Casing size(s) 2-inch diameter
Casing condition good

Hole depth _____
Hole size _____

Describe plugging procedure:

Pressure-grout well casing and screen using down-hole stinger, remove upper portion of casing and surface completion, and cap with concrete.

Describe grout or plugging material:

Enviroplug bentonite grout (30% solids)

Type of non-slip plug: concrete/gravelThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: D. J. [Signature]Signature of Well Owner: Todd / [Signature]Date: 8-7-07

LOCATION MAP:



EnecoTech

ENVIRONMENTAL CONSULTANTS

3050 METRO DRIVE
SUITE 115
BLOOMINGTON, MN 55425

SEE SITE MAP

TEST HOLE/WELL LOG

PAGE 1 OF 1

TEST/WELL NUMBER:

MW-05

PROJECT:

COASTAL - MITCHELL, SD

DATE:

5/24/95

PROJECT NUMBER:

725-012

LOGGED BY:

JED

DRILLED BY:

BERGERSON CASWELL

ELEVATION:

1301.19(GR)

DETECTOR:

PID

CALIBRATED TO:

ISOBUTYLENE

BACKGROUND (PPM):

0.0

DRILLING METHOD:

HSA

SAMPLING METHOD:

SS

GRAVEL PACK:

RED FLINT #30

SEAL:

BENTONITE

GROUT:

CEMENT

CASING TYPE:

PVC

DIAMETER:

2"

LENGTH:

3'

HOLE DIA:

8"

DEPTH TO LIQUID:

8'

SCREEN TYPE:

PVC

SLOT:

0.01"

DIAMETER:

2"

LENGTH:

10'

TOTAL DEPTH:

14'

DEPTH TO WATER:

8'

SOIL/ROCK TYPE	COLOR	MOISTURE	PID READING		ODOR	SAMPLE TYPE	DEPTH	% RECOVERED	BLOW COUNTS	LITHOLOGY / REMARKS	WATER LEVEL: TIME:		WELL COMPLETION
			FIELD	HEAD - SPACE									
SM	BRN	M		0.0	NONE	SS	0		5/8 7/8	SILTY SAND, BROWN, GRAVEL, FILL, MOIST			
ML	BRN TO GRAY	M		0.0	NONE	SS	5		3/4 5/5	SANDY SILT, BROWN, LARGE SAND SEAMS, GRAVEL, MOIST			
SM	BRN	VM		0.0	NONE	SS			4/4 8/4	SILTY SAND, BROWN, LARGE SAND SEAMS, GRAVEL, VERY MOIST			
		W		0.0	NONE	SS			4/4				
ML	GRAY BRN	M		0.0	NONE	SS	10		5/5 3/8	SAA, GRAY-BROWN, WET SANDY SILT, GRAY-BROWN, SOME CLAY, MOIST			
		D		0.0	NONE	SS			8/8 8/10 13/15	SAA, HARD, DRY			
							15			END OF BORING AT 14' BGS			
							20						

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

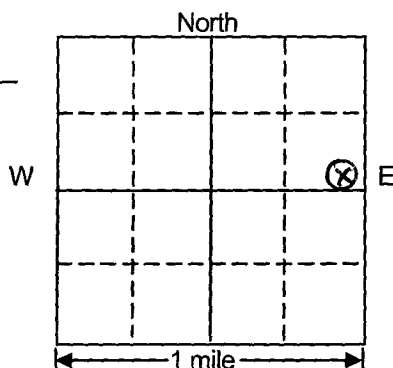
RECEIVED 11-02

Location SE 1/4 NE 1/4 Sec 21 Twp 103N Rg 60W

Well Owner:

AUG 20 2007

County

DavidsonPlease mark well
location with
an "X"Name: Coastal Mart, Inc.WATER RIGHTS
PROGRAMAddress: 1001 Louisiana StreetCity, State, Zip: Houston TX 77002

Comments:

Site is former Coastal Mart No. 1827
200 West 1st Avenue, Mitchell, SD
SDDENR File No. 93.242

Plugged Well is monitoring well MW-7

Plugging Completion Date 7/11/2007

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 14 feetCasing material PVCCasing size(s) 2-inch diameterCasing condition good

Hole depth _____

Hole size _____

Describe plugging procedure:

Pressure-grout well casing and screen using down-hole stinger, remove upper portion of casing and surface completion, and cap with concrete.

Describe grout or plugging material:

Enviroplug bentonite grout (30% solids)

Type of non-slip plug: concrete/gravelThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: D. J. AulSignature of Well Owner: Todd J. MunkhofDate: 8-7-07

LOCATION MAP:


EnecoTech
 ENVIRONMENTAL CONSULTANTS

 3050 METRO DRIVE
 SUITE 115
 BLOOMINGTON, MN 55423

SEE SITE MAP

TEST HOLE/WELL LOG

PAGE 1 OF 1

TEST/WELL NUMBER:

MW-07

PROJECT:

COASTAL - MITCHELL, SD

DATE:

12/13/95

PROJECT NUMBER:

03-00725-012

LOGGED BY:

JED

DRILLED BY:

THEIN WELL CO.

ELEVATION:

1302.71(GR)

DETECTOR:

PID

CALIBRATED TO:

ISOBUTYLENE

BACKGROUND (PPM):

0.0

DRILLING METHOD:

HSA

SAMPLING METHOD:

SS

GRAVEL PACK:

RED FLINT #30

SEAL:

BENTONITE

GROUT:

CEMENT

CASING TYPE:

PVC

DIAMETER:

2"

LENGTH:

4'

HOLE DIA:

8"

DEPTH TO LIQUID:

8.60'

SCREEN TYPE:

PVC

SLOT:

0.01"

DIAMETER:

2"

LENGTH:

10'

TOTAL DEPTH:

14'

DEPTH TO WATER:

8.60'

SOIL/ROCK TYPE	COLOR	MOISTURE	PID READING		ODOR	SAMPLE TYPE	DEPTH	% RECOVERED	BLOW COUNTS	LITHOLOGY / REMARKS	WATER LEVEL	TIME	WELL COMPLETION
			FIELD	HEAD-SPACE									
GM	BRN TO GRAY	DRY		0.0	NONE	AF	0			GRAVEL FILL, FROZEN, DRY			
ML				0.0	NONE	SS	5		1/2	SANDY SILT, BRN TO GRAY, TRACE CLAY, DRY			
									2/2				
				1.6	NONE	SS			3/3				
									4/4				
SP	GRN TO BRN	VM		72.0	SLT	SS	10		5/10	CLAYEY SILT, BROWN TO GRAY, GRAVEL SEAM AT 8', VERY MOIST AT 7'			
		SAT		322.0	STR	SS			12/12				
		DRY							4/4				
									5/8				
ML				142.0	STR	SS	15		6/12	SAA, DRY			
									15/18				
									6/8				
				1.6	NONE	SS			18/18				
										END OF BORING AT 14' BGS			

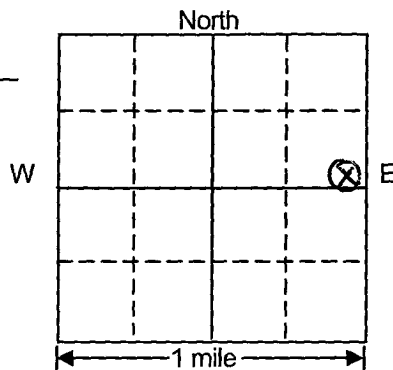
SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

RECEIVED ¹¹⁻⁰³Location SE 1/4 NE 1/4 Sec 21 Twp 103N Rg 60W

Well Owner:

AUG 20 2007

County

DavidsonPlease mark well
location with
an "X"Name: Coastal Mart, Inc.WATER RIGHTS
PROGRAMAddress: 1001 Louisana StreetCity, State, Zip: Houston TX 77002

Comments:

Site is former Coastal Mart No. 1827
200 West 1st Avenue, Mitchell, SD
SDDENR File No. 93.242

Plugged Well is monitoring well MW-10

Plugging Completion Date 7/11/2007

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 14 feetCasing material PVCCasing size(s) 2-inch diameterCasing condition good

Hole depth _____

Hole size _____

Describe plugging procedure:

Pressure-grout well casing and screen using down-hole stinger, remove upper portion of casing and surface completion, and cap with concrete.

Describe grout or plugging material:

Enviroplug bentonite grout (30% solids)

Type of non-slip plug: concrete/gravelThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: D. J. AlSignature of Well Owner: Tom J. MunkhofDate: 8-7-07

LOCATION MAP:


EnecoTech
 ENVIRONMENTAL CONSULTANTS

 2915 WATERS ROAD
 SUITE 110
 EAGAN, MN 55121

SEE SITE MAP

TEST HOLE/WELL LOG

PAGE 1 OF 1

TEST/WELL NUMBER: MW-10	PROJECT: COASTAL-MITCHELL SD.
DATE: 4/1/98	PROJECT NUMBER: 03-00725-012
LOGGED BY: JED	DRILLED BY: THEIN WELL CO.

ELEVATION: 1301.77(GR)	DETECTOR: PID	CALIBRATED TO: ISOBUTYLENE	BACKGROUND (PPM): 0.0	DRILLING METHOD: HSA	SAMPLING METHOD: SS
GRAVEL PACK: RED FLINT #30			SEAL: BENTONITE	GROUT: CEMENT	
CASING TYPE: PVC			DIAMETER: 2"	LENGTH: 4'	HOLE DIA: 8"
SCREEN TYPE: PVC			SLOT: 0.01"	DIAMETER: 2"	LENGTH: 10'
			TOTAL DEPTH: 14'	DEPTH TO LIQUID: 8.4'	
				DEPTH TO WATER: 8.4'	

SOIL/ROCK TYPE	COLOR	MOISTURE	PID READING		ODOR	SAMPLE TYPE	DEPTH	% RECOVERED	BLOW COUNTS	LITHOLOGY / REMARKS	WATER LEVEL: TIME:		WELL COMPLETION
			FIELD	HEAD-SPACE									
GM	BRN	D		0.0	NONE	AF	0			GRAVEL, FILL, BROWN			
ML	BRN TO GRY	D		0.2	NONE	SS			4/5	SANDY SILT, BROWN TO GRAY, TRACE CLAY, DRY			
				0.0	NONE	SS	5		10/11				
									6/9				
SP	BRN	VM		0.6	NONE	SS			17/17	SAND, FINE, BROWN, VERY MOIST			
		SAT		4.5	NONE	SS	10		8/7				
				0.8	NONE	SS			8/7				
ML	BRN TO GRY	M		0.8	NONE	SS			4/5	SAA, SATURATED AT 9.0'			
		D		0.0	NONE	SS			4/6				
									5/3	SANDY SILT, BROWN TO GRAY, SOME CLAY, HARD			
									8/10				
									9/11	SAA, DRY			
									17/22				
							15			END OF BORING AT 14' BGS			

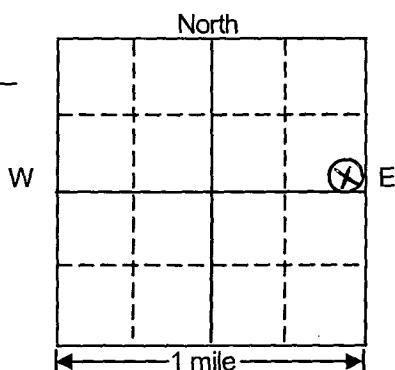
SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

RECEIVED ¹¹⁻⁰²Location SE 1/4 NE 1/4 Sec 21 Twp 103N Rg 60W

Well Owner:

AUG 20 2007

County

DavidsonPlease mark well
location with
an "X"

Name:

Coastal Mart, Inc.WATER RIGHTS
PROGRAM

Address:

1001 Louisana StreetCity, State, Zip: Houston

TX

77002

Comments:

Site is former Coastal Mart No. 1827
200 West 1st Avenue, Mitchell, SD
SDDENR File No. 93.242

Plugged Well is monitoring well MW-11

Plugging Completion Date 7/11/2007

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 14 feetCasing material PVCCasing size(s) 2-inch diameterCasing condition good

Hole depth _____

Hole size _____

Describe plugging procedure:

Pressure-grout well casing and screen using down-hole stinger, remove upper portion of casing and surface completion, and cap with concrete.

Describe grout or plugging material:

Enviroplug bentonite grout (30% solids)

Type of non-slip plug: concrete/gravelThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: D. J. [Signature]Signature of Well Owner: Todd J. [Signature]Date: 8-7-07

LOCATION MAP:


EnecoTech
 ENVIRONMENTAL CONSULTANTS

 2915 WATERS ROAD
 SUITE 110
 EAGAN, MN 55121

SEE SITE MAP

TEST HOLE/WELL LOG

PAGE 1 OF 1

TEST/WELL NUMBER: MW-11

PROJECT: COASTAL-MITCHELL SD.

DATE: 4/1/98

PROJECT NUMBER: 03-00725-012

LOGGED BY: JED

DRILLED BY: THEIN WELL CO.

ELEVATION:
1302.02(GR)DETECTOR:
PIDCALIBRATED TO:
ISOBUTYLENEBACKGROUND (PPM):
0.0DRILLING METHOD:
HSASAMPLING METHOD:
SS

GRAVEL PACK:

RED FLINT #30

SEAL:

BENTONITE

GROUT:

CEMENT

CASING TYPE:

PVC

DIAMETER: 2"

LENGTH: 4'

HOLE
DIA: 8"DEPTH TO
LIQUID: 8.10'

SCREEN TYPE:

PVC

SLOT:

0.01"

DIAMETER: 2"

LENGTH: 10'

TOTAL
DEPTH: 14'DEPTH TO
WATER: 8.10'

SOIL/ROCK TYPE	COLOR	MOISTURE	PID READING		ODOR	SAMPLE TYPE	DEPTH	% RECOVERED	BLOW COUNTS	LITHOLOGY / REMARKS	WATER LEVEL:	TIME:	WELL COMPLETION
			FIELD	HEAD - SPACE									
GM	BRN	D		0.0	NONE	AF	0			GRAVEL, FILL, BROWN			
ML	BRN TO GRY			0.6	NONE	SS			3/3	SANDY SILT, BROWN TO GRAY, SOME CLAY, DRY			
				0.8	NONE	SS	5		5/7				
				0.8	NONE	SS			3/5				
SP	BRN	M		0.6	NONE	SS			9/16				
				0.6	NONE	SS			7/10	SAND, FINE, BROWN, MOIST			
		S		1.4	NONE	SS			9/7				
				1.4	NONE	SS	10		4/5	SAA, SATURATED AT 9.0'			
	RED- BRN	VM		11.7	NONE	SS			5/6				
ML	GRY	D		0.8	NONE	SS			3/7	SAND, COARSE, REDDISH BROWN, VERY MOIST, OXIDE STAINED			
				0.8	NONE	SS			10/14				
				0.8	NONE	SS			9/13	SANDY SILT, GRAY, SOME CLAY, DRY			
				0.8	NONE	SS			12/12				
							15			END OF BORING AT 14' BGS			

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

RECEIVED

Location SE 1/4 NE 1/4 Sec 21 Twp 103N Rg 60W

Well Owner:

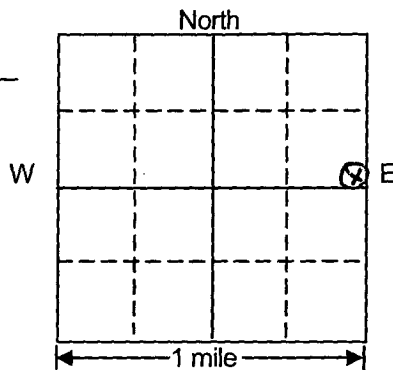
AUG 20 2007

County
DavidsonName: Coastal Mart, Inc.WATER RIGHTS
PROGRAMAddress: 1001 Louisiana StreetCity, State, Zip: Houston TX 77002

Comments:

Site is former Coastal Mart No. 1827
200 West 1st Avenue, Mitchell, SD
SDDENR File No. 93.242

Plugged Well is sump S-1

Please mark well
location with
an "X"Plugging Completion Date 7/11/2007

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 15 feetCasing material PVCCasing size(s) 4-inch diameterCasing condition good

Hole depth _____

Hole size _____

Describe plugging procedure:

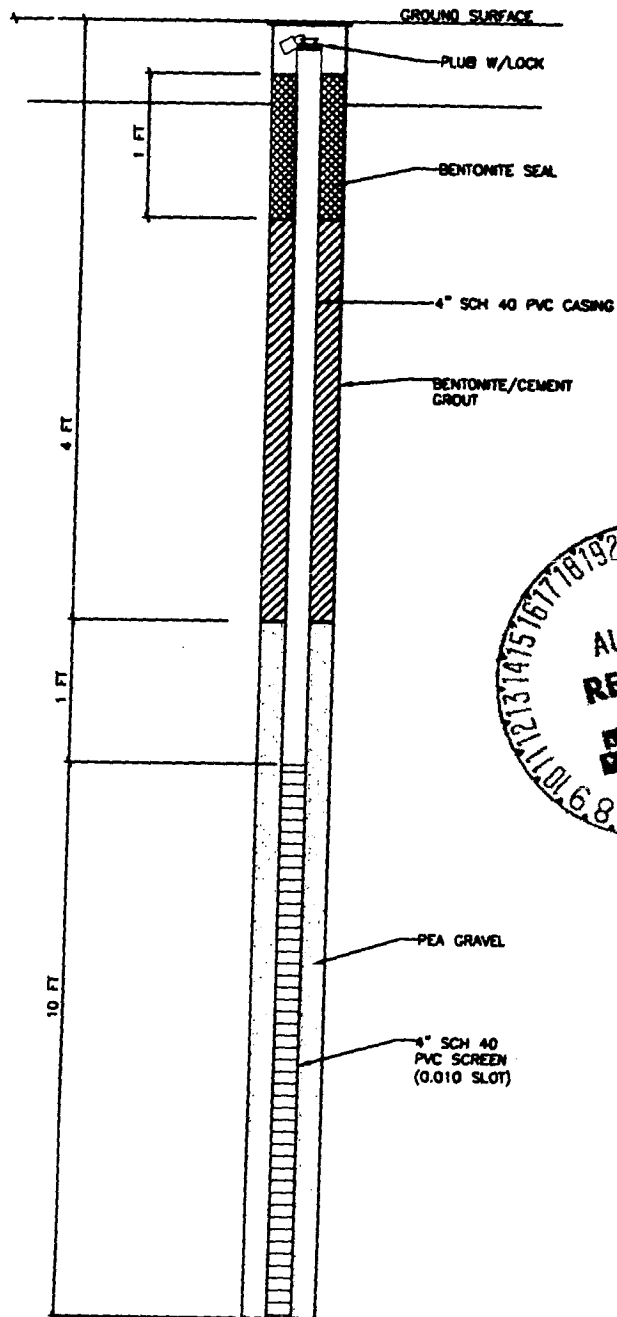
Pressure-grout well casing and screen using down-hole stinger, remove upper portion of casing and surface completion, and cap with concrete.

Describe grout or plugging material:

Enviroplug bentonite grout (30% solids)

Type of non-slip plug: concrete/gravelThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: D. J. J. J.Signature of Well Owner: Todd J. MunkhofDate: 8-7-07

8-23-07



P:\CAD\Coastalmart\1827-Mitchell\Sump.dwg Aug 30, 2006 - 1:56pm



DES MOINES
IOWA

COASTAL MART 1827
200 WEST 1ST AVENUE
MITCHELL, SOUTH DAKOTA


CONSTRUCTION DIAGRAM
OF SUMP S-1

APPENDIX

A

- MONITORING WELL
- ◆ MONITORING WELL
(MILT'S RADIATOR)
- ⊕ SOIL BORING/DIRECT PUSH
- ⊗ RECOVERY WELL
- ◻ ◻ ABANDONED MONITORING
OR RECOVERY WELL
- ◆ UST CLOSURE SAMPLE
- ⊕ EXCAVATION SOIL SAMPLE
- ⊕ SUMP
- ⊗ MANHOLE
- ◻ ◻ SEWER GRATE
- EXTENT OF SOIL EXCAVATION
(1998 & 2005)

 PROPERTY LINE
 E BURIED ELECTRIC LINE
 OE OVERHEAD ELECTRIC LINE
 GAS NATURAL GAS LINE
 SS SANITARY SEWER
 ST STORM SEWER
 SL SL STEAM LINE
 T BURIED TELEPHONE LINE
 W WATER LINE
 FORMER BUILDING





MWH

CERTIFIED MAIL No. 7005 1820 0005 1566 2622

August 16, 2007

Mr. Terry Florentz
South Dakota Department of Environment and Natural Resources
Joe Foss Building
523 East Capitol Avenue
Pierre, SD 57501-3181

RE: Well Closure Activities
Former Coastal Mart, Inc. Site No. 1827
200 West 1st Avenue, Mitchell, South Dakota
SDDENR File No. 93.242
SDPRCF File No. 2870

Dear Mr. Florentz:

In accordance with the South Dakota Department of Environment and Natural Resources (SDDENR) letter dated March 7, 2007, please find enclosed the well abandonment forms, soil boring logs, and a map for the above-referenced former Coastal Mart, Inc. (CMI) site. If you have any questions or require further information, please feel free to contact Mr. Todd Muelhoefer, representing CMI, at 719-520-4761 or me at 515-253-0830.

Sincerely,

Stephen R. Varsa
Project Manager
South Dakota Petroleum Release Remediator No. 7534

/srv:sjr

Enclosures

cc: John McVey, South Dakota Petroleum Release Compensation Fund
Larry Headrick, South Dakota Petroleum Release Compensation Fund
Todd Muelhoefer, Project Manager representing CMI, 2 North Nevada Avenue,
Colorado Springs, CO 80903
CMI Houston File
Laura Bonafede, Williams & Ross, Inc.



RECEIVED

AUG 20 2007

**WATER RIGHTS
PROGRAM**

P:\Word Processing\COASTAL MART\SOUTH DAKOTA\1827-Mitchell\Ltr-08-07-Florentz (SDDENR)-Well Closure Activities (1827).doc