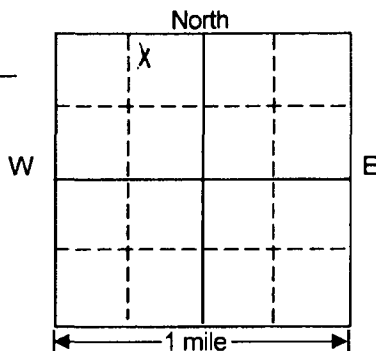


SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE $\frac{1}{4}$ NW $\frac{1}{4}$ Sec 24 Twp 123 Rg 64

County

BrownPlease mark well
location with
an "X"Plugging Completion Date 6/29/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-1
45 degrees, 27.534' N
98 degrees, 29.320' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 27 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED**SEP 14 2009****WATER RIGHTS
PROGRAM**

Describe plugging procedure:

Bentonite grout placed from 3 to 27 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

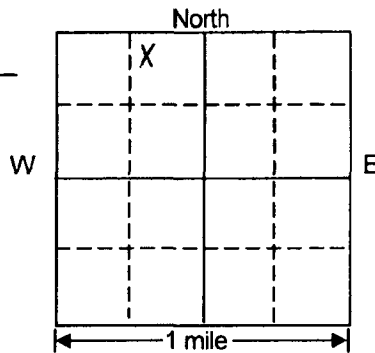
Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.

Signature of Licensed Representative: _____

Signature of Well Owner: Paul TaylorDate: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE 1/4 NW 1/4 Sec 24 Twp 123 Rg 64County
BrownPlease mark well
location with
an "X"Plugging Completion Date 6/29/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-2
45 degrees, 27.534' N
98 degrees, 29.299' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 18 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 18 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

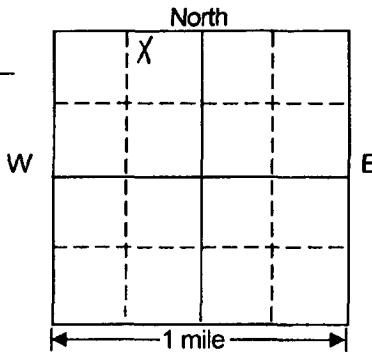
Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.

Signature of Licensed Representative: _____

Signature of Well Owner: Paul JayDate: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE 1/4 NW 1/4 Sec 24 Twp 123 Rg 64County
BrownPlease mark well
location with
an "X"Plugging Completion Date 6/29/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-3
45 degrees, 27.521' N
98 degrees, 29.295' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐

Well depth 18 feet
Casing material PVC
Casing size(s) 2" diameter
Casing condition good

Hole depth _____
Hole size _____

RECEIVED
SEP 14 2009
WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 18 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.

Signature of Licensed Representative: _____

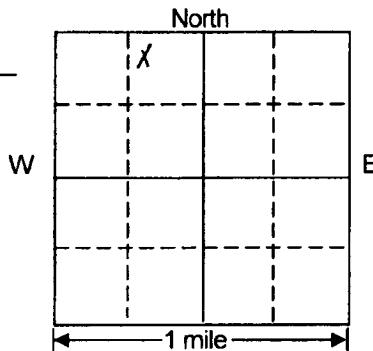
Signature of Well Owner: Paul JayDate: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE $\frac{1}{4}$ NW $\frac{1}{4}$ Sec 24 Twp 123 Rg 64

County

BrownPlease mark well
location with
an "X"Plugging Completion Date 6/29/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-4
45 degrees, 27.523' N
98 degrees, 29.296' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 18 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 18 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.

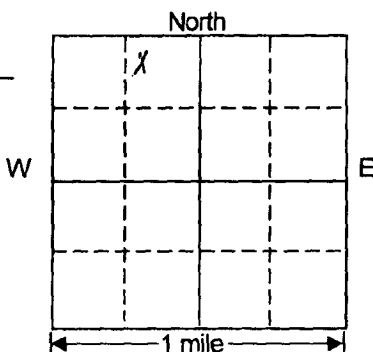
Signature of Licensed Representative: _____

Signature of Well Owner: _____

Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE 1/4 NW 1/4 Sec 24 Twp 123 Rg 64County
BrownPlease mark well
location with
an "X"Plugging Completion Date 6/29/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-5
45 degrees, 27.524' N
98 degrees, 29.317' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 19 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED
SEP 14 2009WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 19 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.

Signature of Licensed Representative: _____

Signature of Well Owner: _____

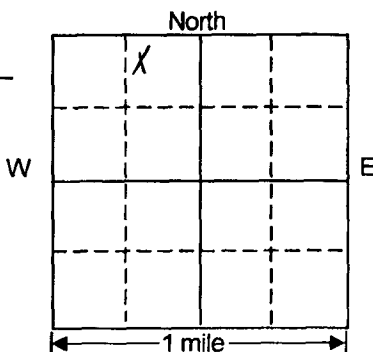
Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE 1/4 NW 1/4 Sec 24 Twp 123 Rg 64

County

BrownPlease mark well
location with
an "X"Plugging Completion Date 6/29/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-6
45 degrees, 27.528' N
98 degrees, 29.323' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 18 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 18 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

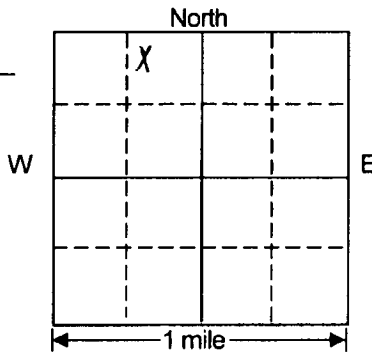
Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: *Daniel Ash*Signature of Well Owner: *Paul Taylor*Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE $\frac{1}{4}$ NW $\frac{1}{4}$ Sec 24 Twp 123 Rg 64

County

BrownPlease mark well
location with
an "X"Plugging Completion Date 6/29/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-8
45 degrees, 27.485' N
98 degrees, 29.302' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 14 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 14 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

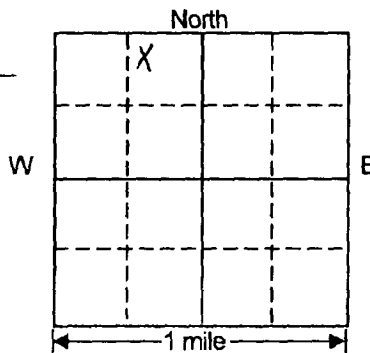
Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.

Signature of Licensed Representative: _____

Signature of Well Owner: Paul J. G. 67Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE ¼ NW ¼ Sec. 24 Twp 123 Rg 64County
BrownPlease mark well
location with
an "X"Plugging Completion Date 6/29/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-9
45 degrees, 27.508' N
98 degrees, 29.331' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 17 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED
SEP 14 2009
WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 17 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

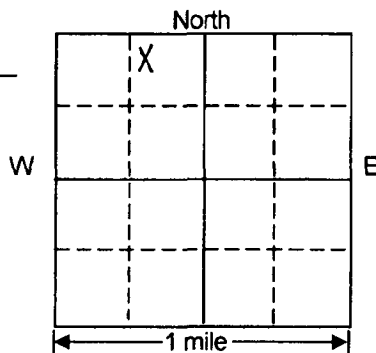
Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: *Daniel A. [Signature]*Signature of Well Owner: *Paul Taylor*Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE ¼ NW ¼ Sec 24 Twp 123 Rg 64

County

BrownPlease mark well
location with
an "X"Plugging Completion Date 6/29/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-10
45 degrees, 27.543' N
98 degrees, 29.307' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 18 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 18 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

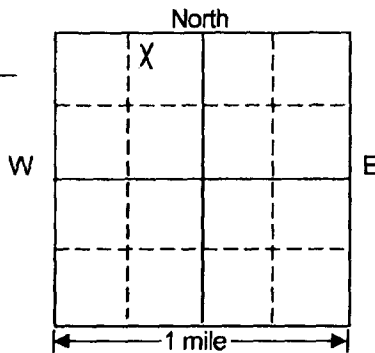
Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: *Daniel Ash*Signature of Well Owner: *Paul Igler*Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE 1/4 NW 1/4 Sec 24 Twp 123 Rg 64County
BrownPlease mark well
location with
an "X"Plugging Completion Date 6/30/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-11
45 degrees, 27.516' N
98 degrees, 29.350' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 17 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 17 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

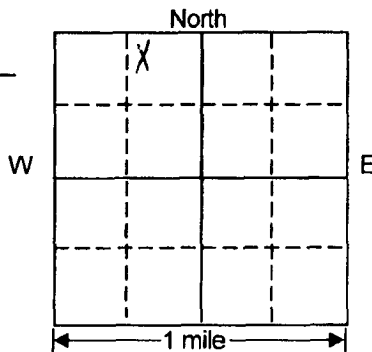
Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: *Daniel A. ...*Signature of Well Owner: *Paul J. ...*Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE 1/4 NW 1/4 Sec 24 Twp 123 Rg 64County
BrownPlease mark well
location with
an "X"Plugging Completion Date 6/30/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-13
45 degrees, 27.487' N
98 degrees, 29.343' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐

Well depth 18 feet
Casing material PVC
Casing size(s) 2" diameter
Casing condition good

Hole depth _____
Hole size _____

RECEIVED
SEP 14 2009
WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 18 feet below ground surface (bgs) via tremie pipe. Compacted silts/clays placed from ground surface to 3 feet bgs.

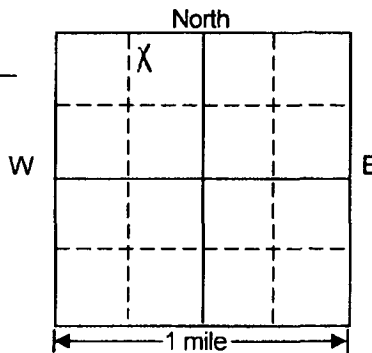
Describe grout or plugging material:

Bentonite grout is 30% solids Enviroplug bentonite grout.

Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: *Daniel Ash*Signature of Well Owner: *Paul Jg 67*Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE 1/4 NW 1/4 Sec 24 Twp 123 Rg 64County
BrownPlease mark well
location with
an "X"Plugging Completion Date 6/30/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-14
45 degrees, 27.540' N
98 degrees, 29.349' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐

Well depth 17 feet
Casing material PVC
Casing size(s) 2" diameter
Casing condition good

Hole depth _____
Hole size _____

RECEIVED
SEP 14 2009
WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 17 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Asphalt patch placed from ground surface to 0.5 feet bgs.

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

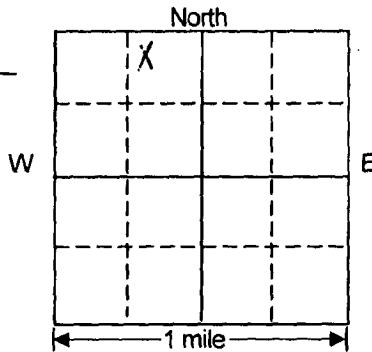
Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.

Signature of Licensed Representative: _____

Signature of Well Owner: Paul JagDate: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE $\frac{1}{4}$ NW $\frac{1}{4}$ Sec. 24 Twp 123 Rg 64County
BrownPlease mark well
location with
an "X"Plugging Completion Date 6/30/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-15
45 degrees, 27.500' N
98 degrees, 29.370' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 18 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 18 feet below ground surface (bgs) via tremie pipe. Silts/clays placed from ground surface to 3 feet bgs.

Describe grout or plugging material:

Bentonite grout is 30% solids Enviroplug bentonite grout.

Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.

Signature of Licensed Representative: _____

Signature of Well Owner: _____

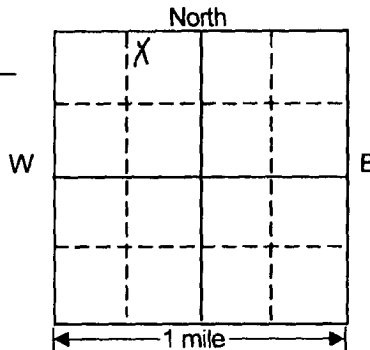
Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE $\frac{1}{4}$ NW $\frac{1}{4}$ Sec 24 Twp 123 Rg 64

County

BrownPlease mark well
location with
an "X"Plugging Completion Date 6/30/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-16
45 degrees, 27.477' N
98 degrees, 29.330' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 18 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 18 feet below ground surface (bgs) via tremie pipe. Silts/clays placed from ground surface to 3 feet bgs.

Describe grout or plugging material:

Bentonite grout is 30% solids Enviroplug bentonite grout.

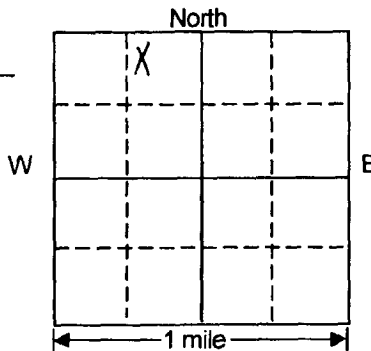
Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: *Daniel Ash*Signature of Well Owner: *Paul J. G.*Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE 1/4 NW 1/4 Sec 24 Twp 123 Rg 64

County

BrownPlease mark well
location with
an "X"Plugging Completion Date 6/30/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-17
45 degrees, 27.553' N
98 degrees, 29.304' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 18 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 18 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Asphalt patch placed from ground surface to 0.5 feet bgs.

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

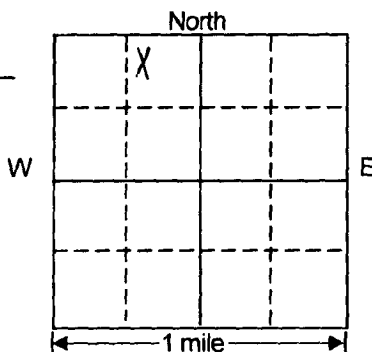
Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: *Daniel A. ...*Signature of Well Owner: *Paul J. ...*Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE 1/4 NW 1/4 Sec 24 Twp 123 Rg 64

County

BrownPlease mark well
location with
an "X"Plugging Completion Date 6/30/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-19
45 degrees, 27.518' N
98 degrees, 29.402' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 18 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 18 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Gravel placed from ground surface to 0.5 feet bgs.

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

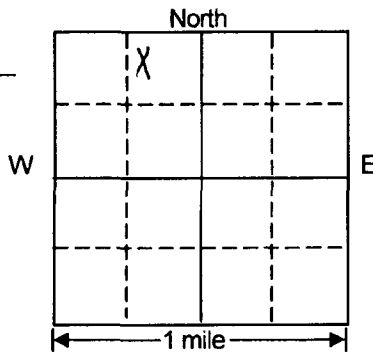
Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: *Daniel Ash*Signature of Well Owner: *Paul J. 1869*Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE $\frac{1}{4}$ NW $\frac{1}{4}$ Sec 24 Twp 123 Rg 64

County

BrownPlease mark well
location with
an "X"Plugging Completion Date 6/30/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-20
45 degrees, 27.486' N
98 degrees, 29.406' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐

Well depth 19 feet
Casing material PVC
Casing size(s) 2" diameter
Casing condition good

Hole depth _____
Hole size _____

RECEIVED**SEP 14 2009**WATER RIGHT
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 19 feet below ground surface (bgs) via tremie pipe. Silts/clays placed from ground surface to 3 feet bgs.

Describe grout or plugging material:

Bentonite grout is 30% solids Enviroplug bentonite grout.

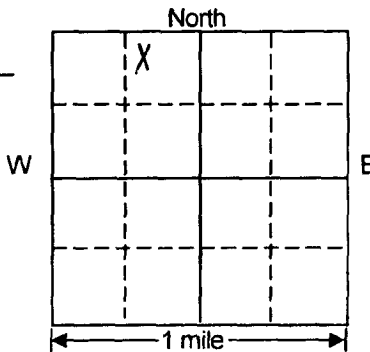
Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: *Daniel Ash*Signature of Well Owner: *Paul Taylor*Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE $\frac{1}{4}$ NW $\frac{1}{4}$ Sec 24 Twp 123 Rg 64

County

BrownPlease mark well
location with
an "X"Plugging Completion Date 6/30/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-21
45 degrees, 27.468' N
98 degrees, 29.372' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 19 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 19 feet below ground surface (bgs) via tremie pipe. Silts/clays placed from ground surface to 3 feet bgs.

Describe grout or plugging material:

Bentonite grout is 30% solids Enviroplug bentonite grout.

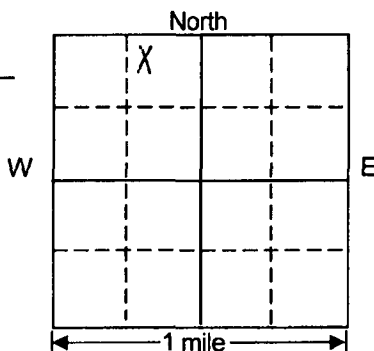
Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: *Daniel A. ...*Signature of Well Owner: *Paul Joy ...*Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE 1/4 NW 1/4 Sec. 24 Twp 123 Rg 64

County

BrownPlease mark well
location with
an "X"Plugging Completion Date 6/30/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-22
45 degrees, 27.526' N
98 degrees, 29.337' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 20 feetCasing material PVCCasing size(s) 3/4" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 20 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

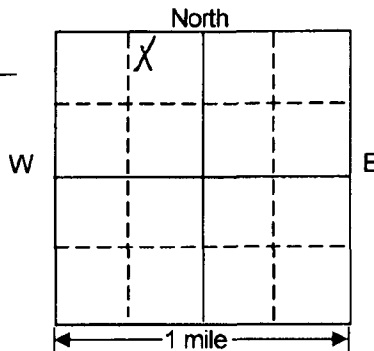
Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.

Signature of Licensed Representative: _____

Signature of Well Owner: Paul Ig67Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE $\frac{1}{4}$ NW $\frac{1}{4}$ Sec 24 Twp 123 Rg 64County
BrownPlease mark well
location with
an "X"Plugging Completion Date 7/1/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-24
45 degrees, 27.508' N
98 degrees, 29.367' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 18 feetCasing material PVCCasing size(s) $\frac{3}{4}$ " diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 18 feet below ground surface (bgs) via tremie pipe. Silts/clays placed from ground surface to 3 feet bgs.

Describe grout or plugging material:

Bentonite grout is 30% solids Enviroplug bentonite grout.

Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: *Daniel Paul*Signature of Well Owner: *Paul Taylor*Date: 9-9-2009

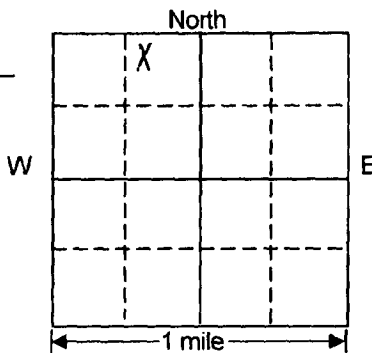
13-9-09

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE $\frac{1}{4}$ NW $\frac{1}{4}$ Sec 24 Twp 123 Rg 64

County

BrownPlease mark well
location with
an "X"Plugging Completion Date 7/1/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

MW-25
45 degrees, 27.484' N
98 degrees, 29.345' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 18 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

Describe plugging procedure:

WATER RIGHTS
PROGRAM

Bentonite grout placed from 3 to 18 feet below ground surface (bgs) via tremie pipe. Silts/clays placed from ground surface to 3 feet bgs.

Describe grout or plugging material:

Bentonite grout is 30% solids Enviroplug bentonite grout.

Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.

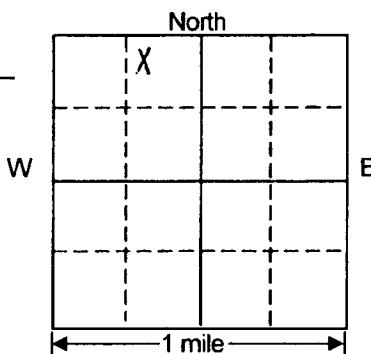
Signature of Licensed Representative: _____

Signature of Well Owner: _____

Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE $\frac{1}{4}$ NW $\frac{1}{4}$ Sec 24 Twp 123 Rg 64County
BrownPlease mark well
location with
an "X"Plugging Completion Date 7/1/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

RW-2
45 degrees, 27.519' N
98 degrees, 29.295' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 30 feetCasing material PVCCasing size(s) 6" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009



WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 30 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

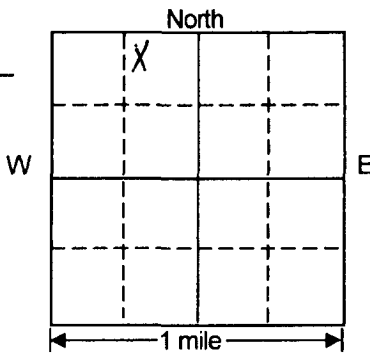
Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: Signature of Well Owner: Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE 1/4 NW 1/4 Sec 24 Twp 123 Rg 64

County

BrownPlease mark well
location with
an "X"Plugging Completion Date 7/1/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

SVE-1
45 degrees, 27.507' N
98 degrees, 29.338' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 15 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

Describe plugging procedure:

Bentonite grout placed from 3 to 15 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

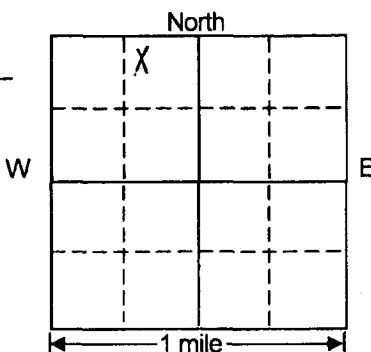
Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: *Daniel Ash*Signature of Well Owner: *Paul Jay*Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE $\frac{1}{4}$ NW $\frac{1}{4}$ Sec 24 Twp 123 Rg 64

County

BrownPlease mark well
location with
an "X"Plugging Completion Date 7/1/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

SVE-2
45 degrees, 27.515' N
98 degrees, 29.340' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒Well depth 15 feetCasing material PVCCasing size(s) 2" diameterCasing condition goodTEST HOLE ☐

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 15 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.

Signature of Licensed Representative: _____

Signature of Well Owner: _____

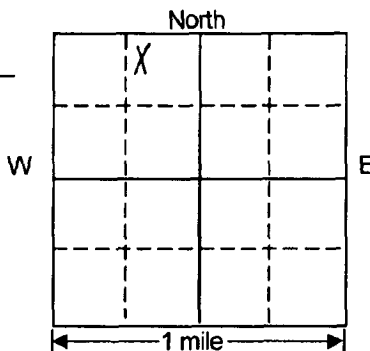
Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE 1/4 NW 1/4 Sec 24 Twp 123 Rg 64

County

BrownPlease mark well
location with
an "X"Plugging Completion Date 7/1/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

SVE-3
45 degrees, 27.534' N
98 degrees, 29.318' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 15 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 15 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

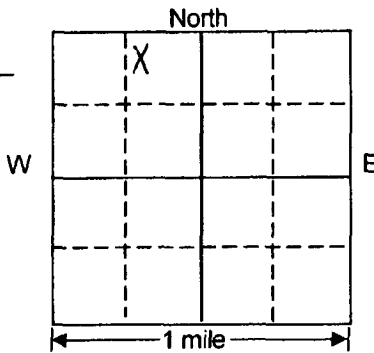
Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: *Daniel A. ...*Signature of Well Owner: *Jane Taylor*Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE 1/4 NW 1/4 Sec 24 Twp 123 Rg 64County
BrownPlease mark well
location with
an "X"Plugging Completion Date 7/1/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

SVE-4
45 degrees, 27.535' N
98 degrees, 29.319' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐

Well depth 13 feet
Casing material PVC
Casing size(s) 2" diameter
Casing condition good

Hole depth _____
Hole size _____

RECEIVED
SEP 14 2009
WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 13 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

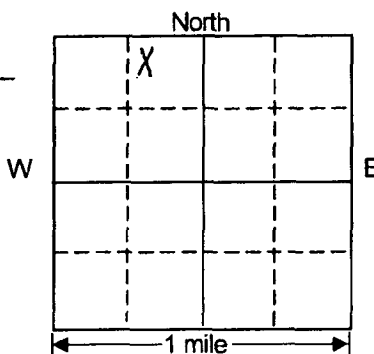
Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.

Signature of Licensed Representative: _____

Signature of Well Owner: Paul J. JorgensenDate: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE 1/4 NW 1/4 Sec 24 Twp 123 Rg 64County
BrownPlease mark well
location with
an "X"Plugging Completion Date 7/1/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

SVE-5
45 degrees, 27.514' N
98 degrees, 29.329' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 15 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009



WATER RIGHTS
PROGRAM

Describe plugging procedure:

Bentonite grout placed from 3 to 15 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

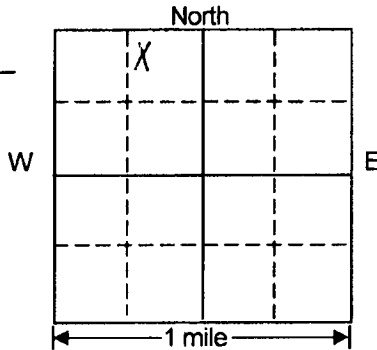
Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.Signature of Licensed Representative: Signature of Well Owner: Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE 1/4 NW 1/4 Sec 24 Twp 123 Rg 64

County

BrownPlease mark well
location with
an "X"Plugging Completion Date 7/1/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

SVE-6
45 degrees, 27.509' N
98 degrees, 29.337' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 13 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED

SEP 14 2009

Describe plugging procedure:

Bentonite grout placed from 3 to 13 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

WATER RIGHTS
PROGRAM

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.

Signature of Licensed Representative: _____

Signature of Well Owner: _____

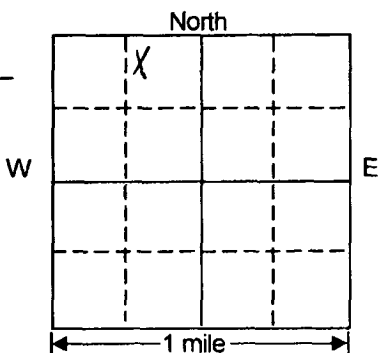
Date: 9-9-2009

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NE $\frac{1}{4}$ NW $\frac{1}{4}$ Sec 24 Twp 123 Rg 64

County

BrownPlease mark well
location with
an "X"Plugging Completion Date 7/1/2009

Well Owner:

Name: BP Products North AmericaAddress: 501 Westlake Park BlvdCity, State, Zip: Houston TX 77079

Comments:

SVE-7
45 degrees, 27.510' N
98 degrees, 29.314' W

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 15 feetCasing material PVCCasing size(s) 2" diameterCasing condition good

Hole depth _____

Hole size _____

RECEIVED
SEP 14 2009

Describe plugging procedure:

Bentonite grout placed from 3 to 15 feet below ground surface (bgs) via tremie pipe. Clean sand placed from 0.5 to 3 feet bgs. Concrete placed from ground surface to 0.5 feet bgs.

WATER RIGHTS
PROGRAM

Describe grout or plugging material:

Sand is 10/20 washed silica sand. Bentonite grout is 30% solids Enviroplug bentonite grout.

Type of non-slip plug: noneThis well or test hole was plugged under license # 661 and this report is true and accurate.Drilling firm: Thiele Geotech, Inc.

Signature of Licensed Representative: _____

Signature of Well Owner: _____

Date: 9-9-2009



RECEIVED

SEP 14 2009

WATER RIGHTS
PROGRAM

13478 Chandler Road
Omaha, Nebraska 68138-3716
402.556.2171 Fax 402.556.7831
www.thielegeotech.com

August 26, 2009

Water Rights Program
Joe Foss Building
523 East Capitol
Pierre, South Dakota 57501-9935

**RE: WELL ABANDONMENT FORMS
BP SITE, 604 SOUTH MAIN STREET, ABERDEEN, SOUTH DAKOTA
TG# 09270.00**

Dear State Representative:

Enclosed please find well abandonment forms for the 29 wells abandoned at the above-referenced site.

Please contact me if you have any questions or requests.

Respectfully,
Thiele Geotech, Inc.

Stephen E. Jacobson, G.I.
Project Geologist

Enclosures