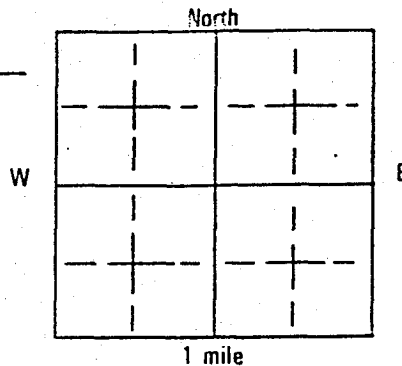


SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

10-85

Location 1/4 SW 1/4 Sec 13 Twp 123N Rg 64W

County

BrownPlease mark well
location with
an "X"See inclosed
Site Plan MW-1Well Owner: Mr. Clark WoldName Educational Assistance CorporationAddress 115 1st Avenue NWAberdeen, S.D. 57041Plugging completion Date 9/13/11

CHECK APPROPRIATE BOX

EXISTING WELL



Well depth

15'

Casing material

5/8 40 PVC

Casing size(s)

2"

Casing condition

Good

TEST HOLE



Hole depth

Hole size

RECEIVED

NOV 02 2011

WATER RIGHTS
PROGRAMDescribe plugging procedure: Clean sand placed from 15' to 4', hand placed. Bentonite placed from 4' to 2' hand placed. Cement placed from 2' to surface.Describe grout or plugging material: 5000 psi concrete placed from 2' to surface.Type of non-slip plug: Hydrated Bentonite placed from 4' to 2'.This well or test hole was plugged under license # 617 And this report is true and accurate.Drilling firm American Technical Services Inc.Signature of Licensed Representative Matt HudsonSignature of Well Owner Clark WoldDate 10/20/2011

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

10-85


Location 1/4 SW 1/4 Sec 13 Twp 123N Rg 64W

County

Brown

Please mark well location with an "X"

W

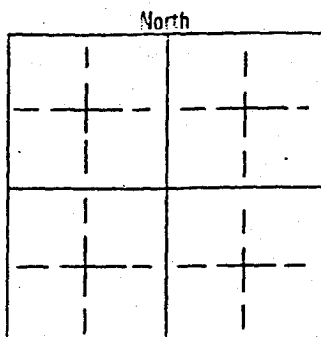

1 mile

Well Owner: Mr. Clark WoldName Educational Assistance CorporationAddress 115 1st Avenue NWAberdeen, S.D. 57041Plugging completion Date 9/13/11See inclosed
Site Plan mw-2

CHECK APPROPRIATE BOX

EXISTING WELL



TEST HOLE



Well depth

15'

Casing material

Sch 40 PVC

Casing size(s)

2"

Casing condition

Good

Hole depth

Hole size

RECEIVED

NOV 02 2011

WATER RIGHTS
PROGRAMDescribe plugging procedure: Clean sand placed from 15' to 4', hand placed. Bentonite placed from 4' to 2', hand placed. Cement placed from 2' to surface.Describe grout or plugging material: 5000 psi concrete placed from 2' to surface.Type of non-slip plug: Hydrated Bentonite placed from 4' to 2'.This well or test hole was plugged under license # 617 And this report is true and accurate.Drilling firm American Technical Services, Inc.

Signature of Licensed Representative

Mike Hudson

Signature of Well Owner

Clark Wold

Date

10/20/2011

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

10-85


Location 1/4 Sec 13 Twp 123N Rg 64W

County

Brown

Please mark well location with an "X"

See inclosed Site Plan MW-3

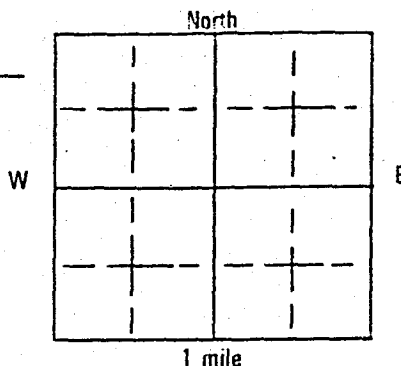Well Owner: Mr. Clark WoldName Educational Assistance CorporationAddress 115 1st Avenue NWAberdeen, S.D. 57041Plugging completion Date 10/04/11

CHECK APPROPRIATE BOX

EXISTING WELL



TEST HOLE



Well depth

15'

Casing material

sch 40 PVC

Casing size(s)

2"

Casing condition

Good

Hole depth

Hole size

RECEIVED

NOV 02 2011

WATER RIGHTS PROGRAM

Describe plugging procedure: Clean sand, placed from 15' to 4', hand placed. Bentonite placed from 4' to 2', hand placed. Concrete placed from 2' to surface.Describe grout or plugging material: 5000 psi concrete placed from 2' to surface.Type of non-slip plug: Hydrated Bentonite placed from 4' to 2'.This well or test hole was plugged under license # 617 And this report is true and accurate.

Drilling firm

American Technical Services, Inc.

Signature of Licensed Representative

Mike Hudson

Signature of Well Owner

Clark Wold

Date

10/20/2011

SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

10-85


Location 1/4 SW 1/4 Sec 13 Twp 123 N Rg 64 W

County

Brown

Please mark well location with an "X"

W



1 mile

Well Owner: Mr. Clark WoldName Educational Assistance CorporationAddress 115 1st Avenue NWAberdeen, S.D. 57041Plugging completion Date 9/13/11See inclosed
Site Plan mw-4

CHECK APPROPRIATE BOX

EXISTING WELL



TEST HOLE



Well depth

15'

Casing material

Sch 40 PVC

Casing size(s)

2"

Casing condition

Good

Hole depth

Hole size

RECEIVED

NOV 02 2011

WATER RIGHTS
PROGRAMDescribe plugging procedure: Clean sand placed from 15' to 4', hand placed. Bentonite placed from 4' to 2', hand placed. Cement placed from 2' to surface.Describe grout or plugging material: 5000 psi concrete placed from 2' to surface.Type of non-slip plug: Hydrated Bentonite placed from 4' to 2'.This well or test hole was plugged under license # 617 And this report is true and accurate.Drilling firm American Technical Services, Inc.Signature of Licensed Representative Mike Hudson

Signature of Well Owner




Clark Wold

Date



10/20/2011

LEGEND

- MW location
- VMP location

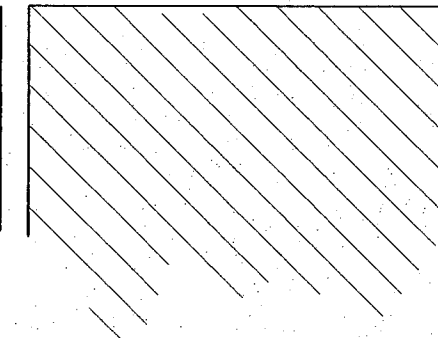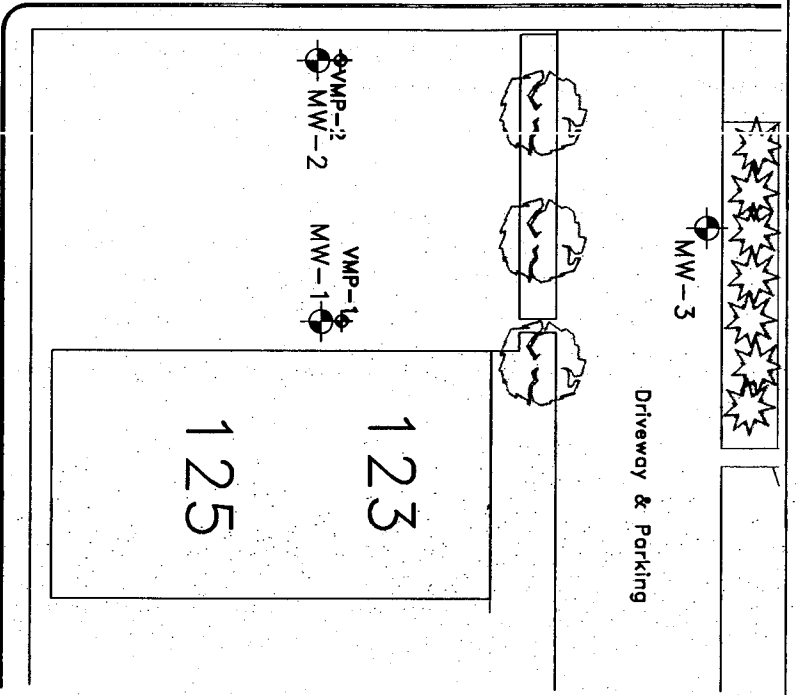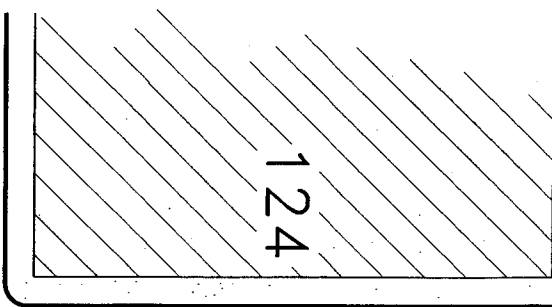

RECEIVED
NOV 02 2011
WATER RIGHTS
PROGRAM

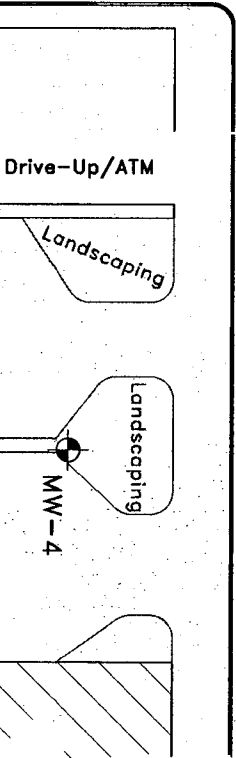

DATE	REVISED	LEGGETTE, BRASHEARS & GRAHAM, INC.		EDUCATION ASSISTANCE CORPORATION	
		Professional Groundwater and Environmental Services		ABERDEEN, SOUTH DAKOTA	
		140 E. Hinks Lane, Suite 126		SITE LOCATION MAP	
		Sioux Falls, South Dakota 57104			
		(605) 334-6000			
		FILE:	eac_aberdeen.dwg	DATE:	12DEC09
				FIGURE:	2