


SOUTH DAKOTA WATER WELL COMPLETION REPORT

11-02

Location SW 1/4 NW 1/4 Sec 10 Twp 7N Rg 17ECounty MEADEPlease mark well
location with an "X"

Well Completion Date

5-27-26Distance to nearest potential pollution source (septic tank, abandoned well, feed lot, etc.)?
700.0 ft. from LIVESTOCK PENS (identify source)

PROPOSED USE:

☒ Domestic/Stock ☐ Municipal ☐ Business ☐ Test holes
☐ Irrigation ☐ Industrial ☐ Institutional ☐ Monitoring well

METHOD OF DRILLING:

FWDRotary

CASING DATA:

☒ Steel ☐ Plastic ☐ Other
 If other describe _____

PIPEWEIGHT	DIAMETER	FROM	TO	HOLE DIAMETER
<u>23.0</u> LB/FT	<u>7.00</u> IN	<u>0.0</u> FT	<u>980.0</u> FT	<u>9.62</u> IN
<u>13.5</u> LB/FT	<u>4.50</u> IN	<u>930.0</u> FT	<u>3,200.0</u> FT	<u>6.50</u> IN

GROUTING DATA:

Grout Type	No. of Sacks	Grout Weight	From	To
<u>CEMENT</u>	<u>142</u>	<u>15.0</u> Lb/gal	<u>980.0</u> Ft	<u>0.0</u> Ft
<u>CEMENT</u>	<u>142</u>	<u>15.0</u> Lb/gal	<u>3,200.0</u> Ft	<u>1,200.0</u> Ft

Describe grouting procedure

PRESSURE PUMPED THROUGH DP

SCREEN:

☐ Perforated pipe ☐ Manufactured
 Diameter _____ Inches Length _____ Feet
 Material _____
 Slot Size _____ Set From _____ Feet to _____ Feet
 Other information GUN PERF 3124-3122, 3120-3108, 3069-3057, 2981-2974

WAS A PACKER OR SEAL USED?

☐ Yes ☒ No

If so, what material?

Describe packer(s) and location

DISINFECTION: Was well disinfected upon completion?

☒ Yes, How? LIQUID NaClO
☐ No, Why Not?
 Lab to which water
 quality sample sent for analysis
Well Owner: PAUL DELBRIDGE

Business Name:

Address: PO BOX 138City, State, Zip: HOWES SD 57748

WELL LOG:

FORMATION	DEPTH	
	FROM	TO
<u>SEE ATTACHED</u>		
<u>PIERRE</u>	<u>SFC</u>	<u>1633</u>
<u>NIOBRARA</u>	<u>1633</u>	<u>1790</u>
<u>CARLILE</u>	<u>1790</u>	<u>2196</u>
<u>GREENHORN</u>	<u>2196</u>	<u>2529</u>
<u>MOWRY</u>	<u>2529</u>	<u>2720</u>
<u>NEWCASTLE</u>	<u>2720</u>	<u>2772</u>
<u>SKULL CREEK</u>	<u>2772</u>	<u>2946</u>
<u>INYAN KARA</u>	<u>2946</u>	<u>3125</u>

STATIC WATER LEVEL 80.0 FEET

If flowing: closed in pressure _____ PSI

GPM flow _____ through _____ Inch pipe

Controlled by ☐ Valve ☐ Reducers ☐ Other _____

Reduced flow rate _____ GPM

Can well be completely shut in?

WELL TEST DATA:

☐ Pumped Describe: AIR DEV
☐ Bailed
☐ Other

Pumping Level Below Land Surface

450.0 Ft. After 12.0 Hrs. pumped 40.0 GPM

_____ Ft. After _____ Hrs. pumped _____ GPM

If pump installed, pump rate: _____ GPM

REMARKS

RECEIVED

JUL 16 2026

OFFICE OF
WATERThis well was drilled under license # 814 and this report is true and accurate.Drilling firm: Keller Drilling LLC

Signature of License Representative:

Albert P. Keller Jr.
 Digitally signed by Albert P. Keller Jr.
 DN: cn=Albert P. Keller Jr., o=Keller Drilling LLC,
 ou, email=Kellerdrilling15@hotmail.com, c=US
 Date: 2022.06.09 14:01:34 -06'00'


Signature of Well Owner or Equitable Property Holder:

Date: _____



Database File delbridge 1.db
Dataset Pathname pass17
Presentation Format gr-n-ccl
Dataset Creation Wed May 27 13:00:05 2026
Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	0	LTEN (lb)	500	9	CCL	-1
---	-----------	-----	---	-----------	-----	---	-----	----

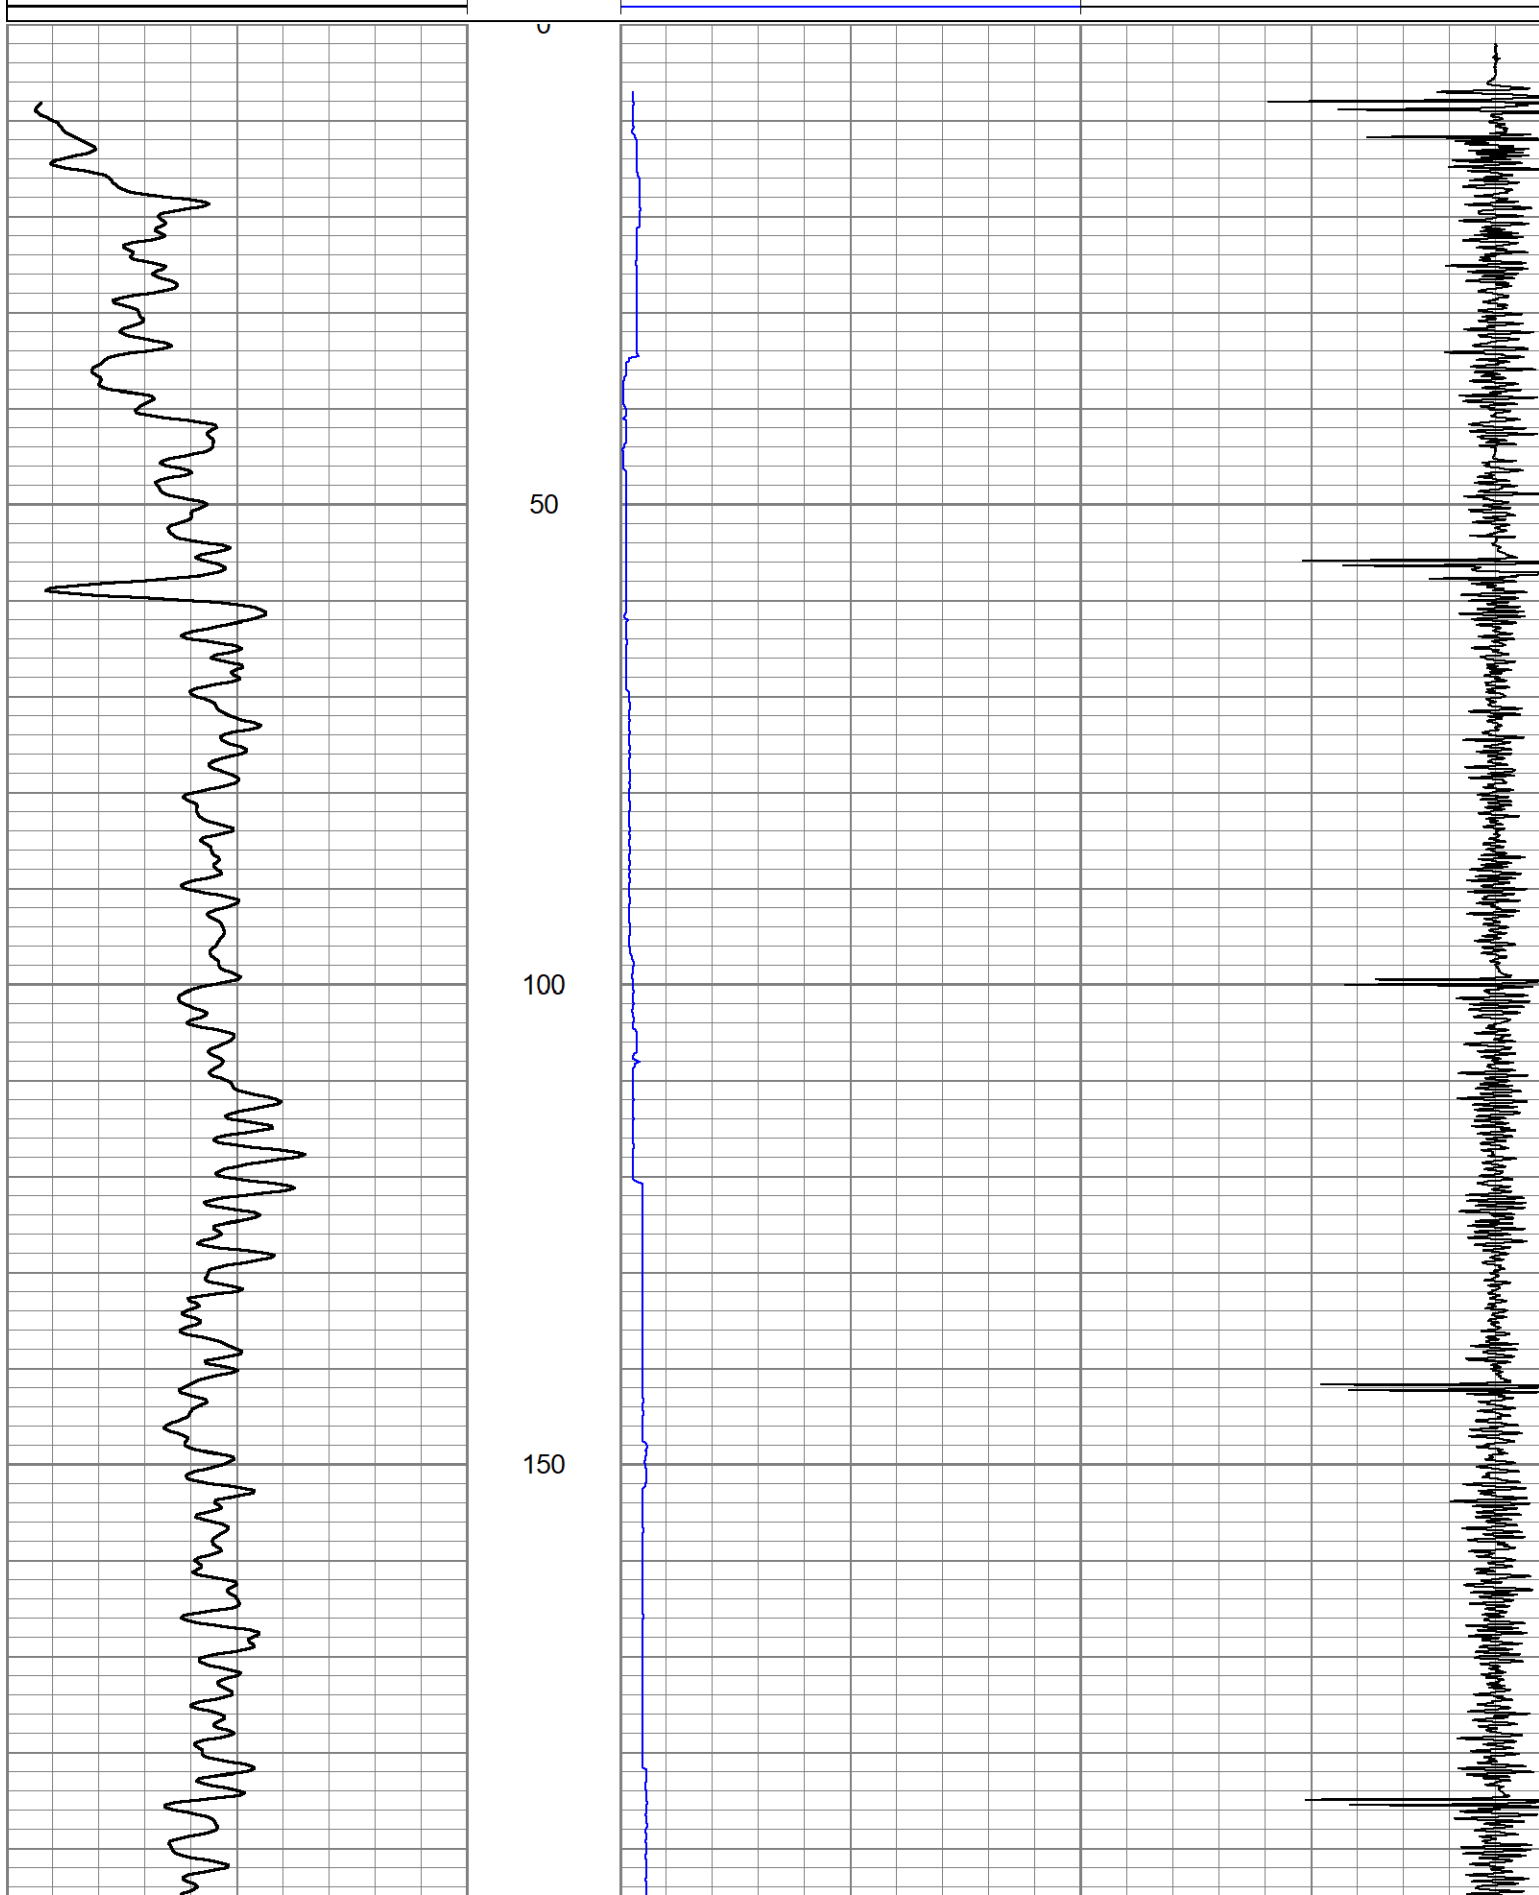




200

250

300

350

400

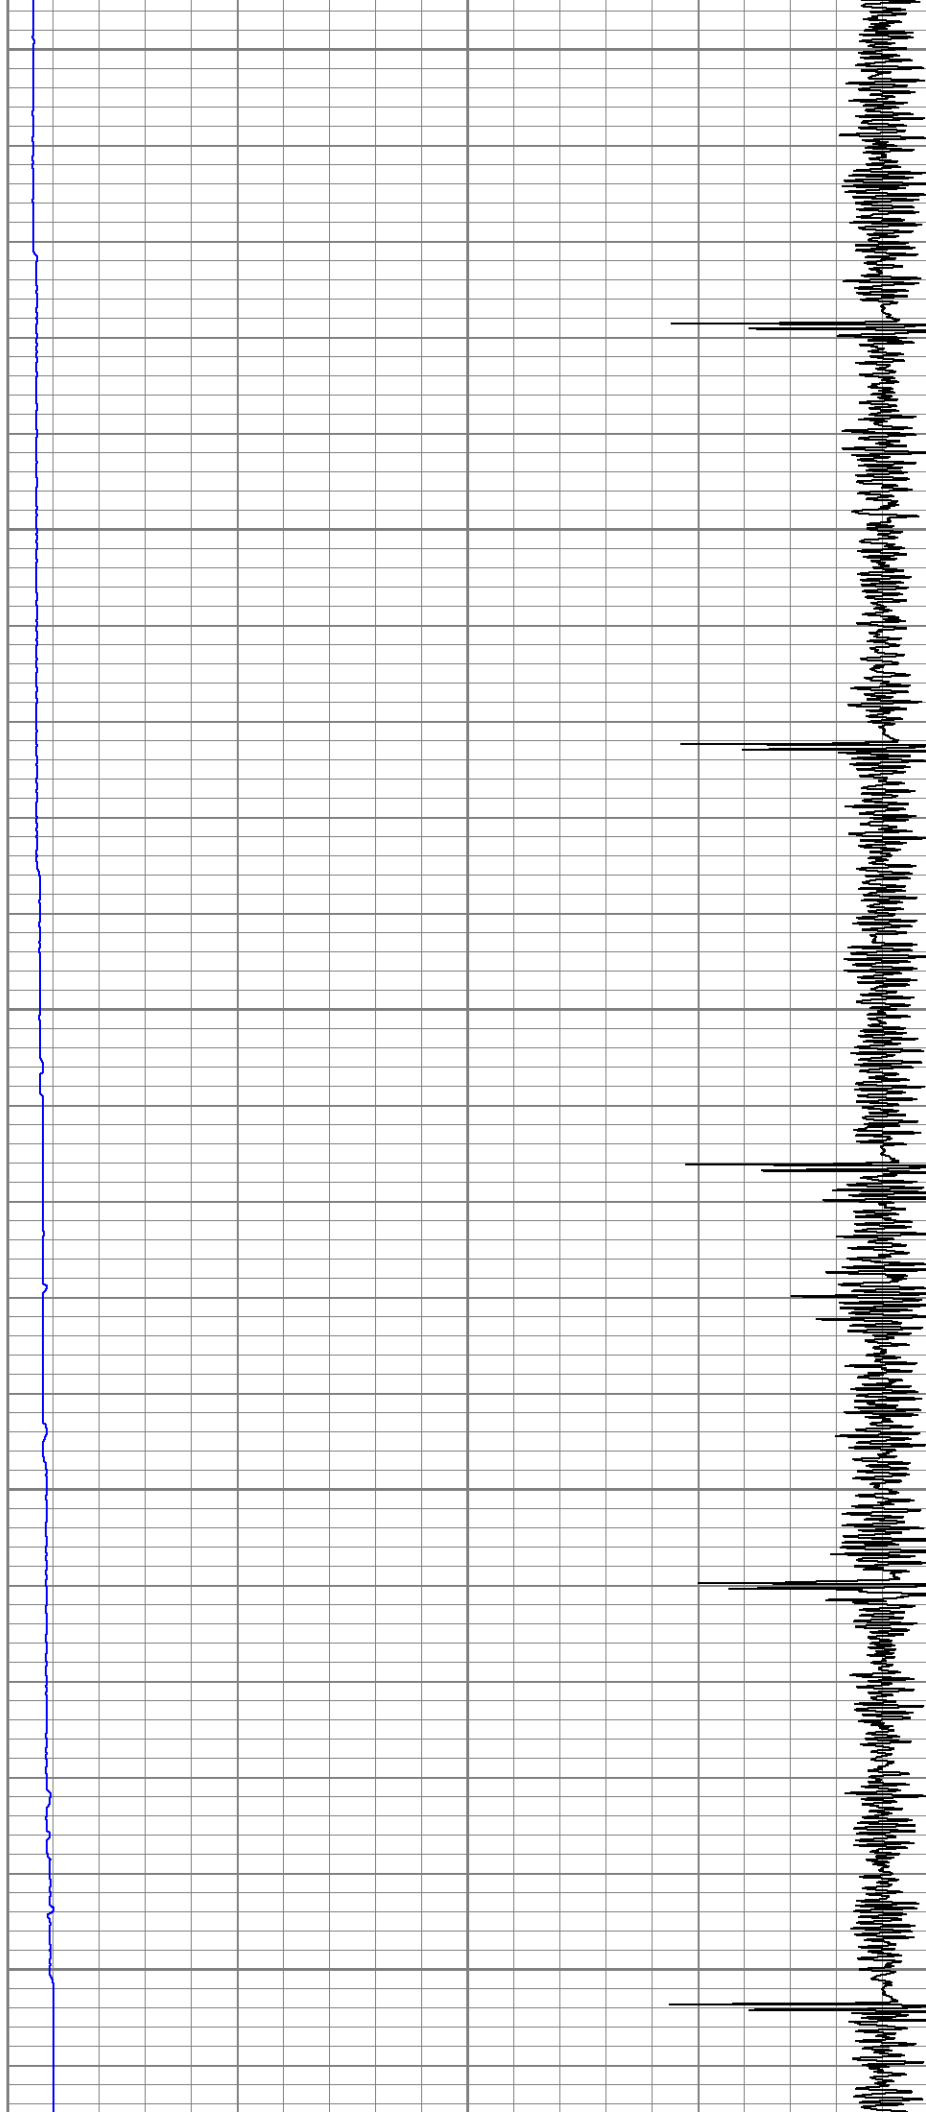





450

500

550

600

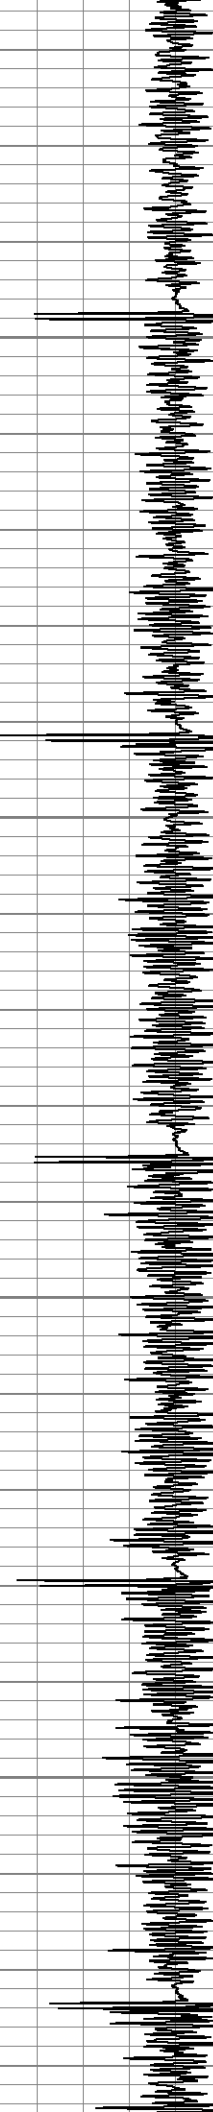

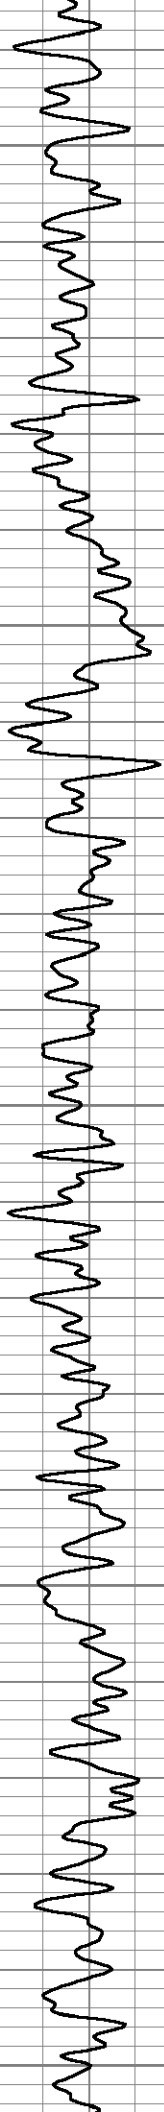



650


700

750

800

850

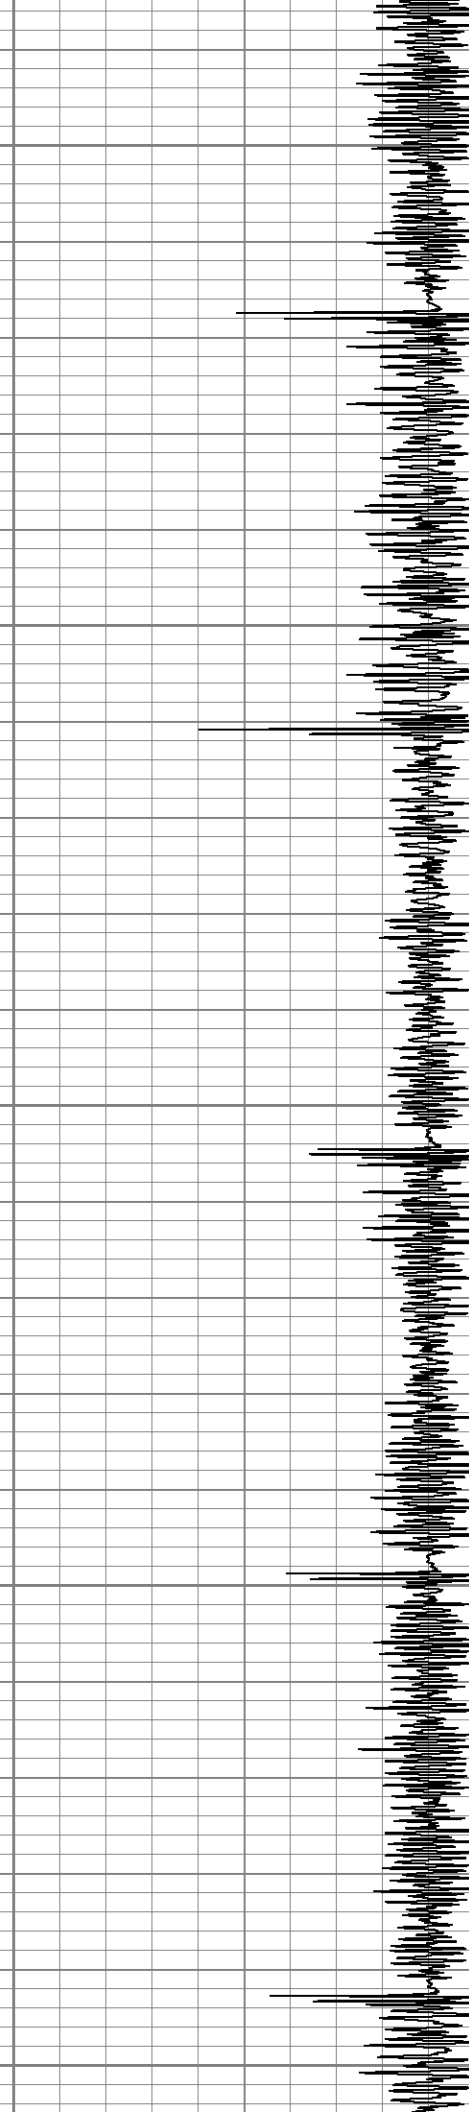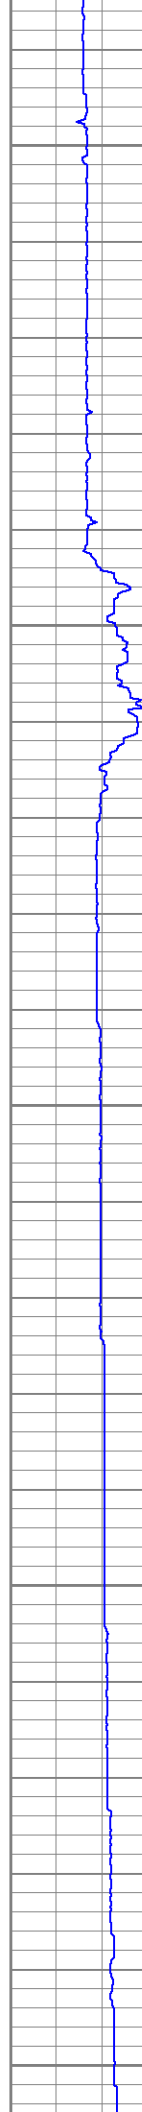

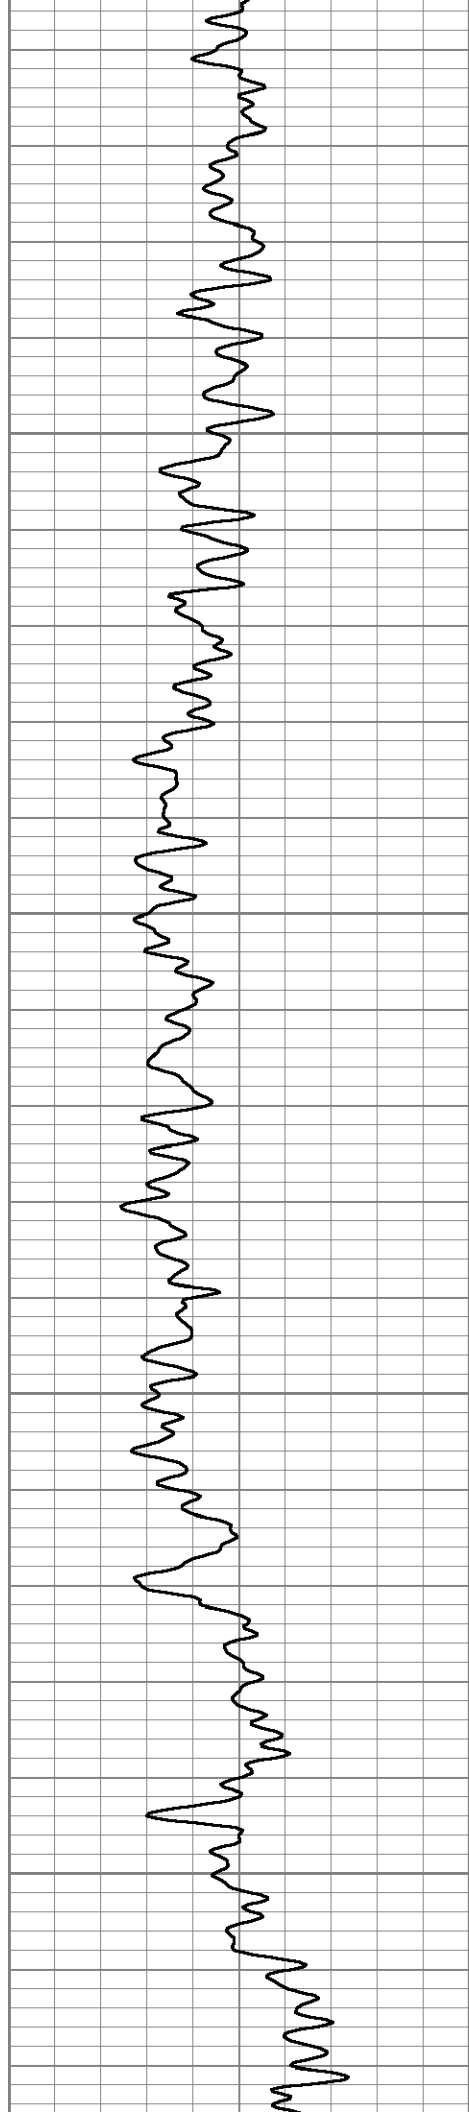



900

950

1000

1050

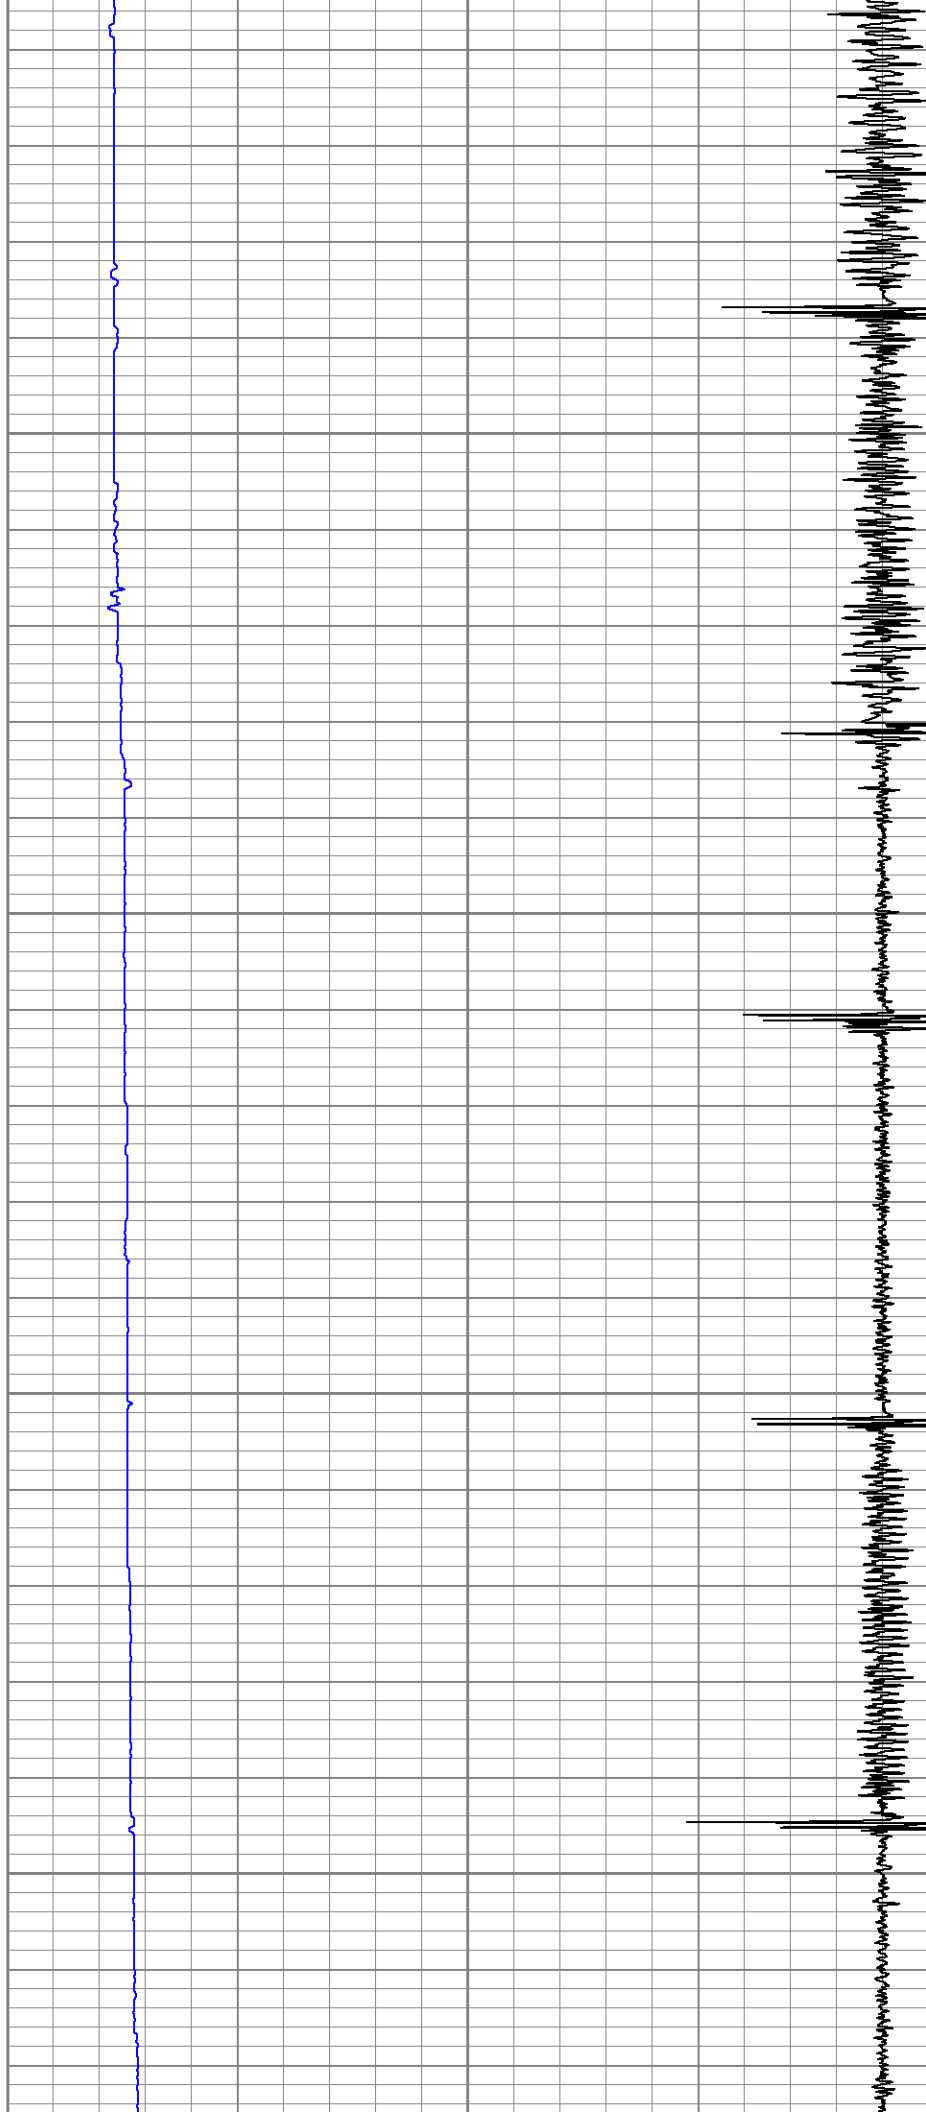

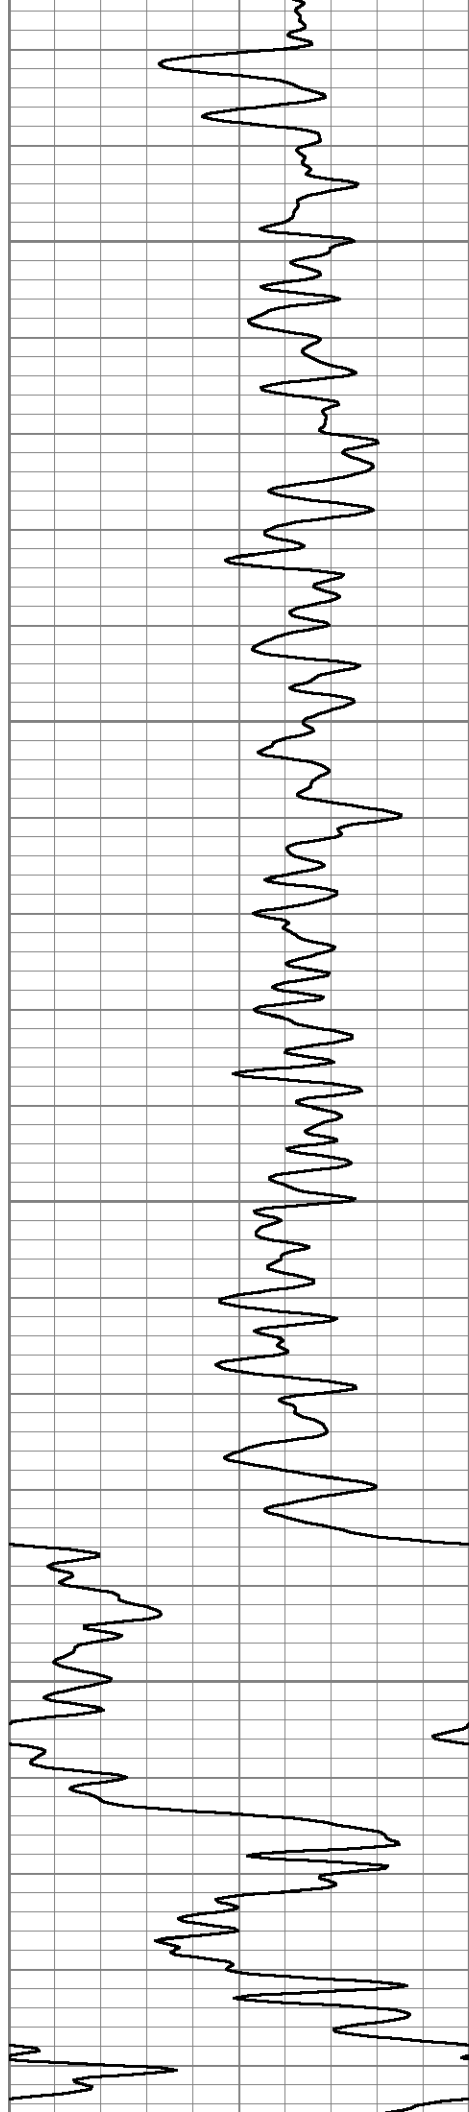



1100

1150

1200

1250

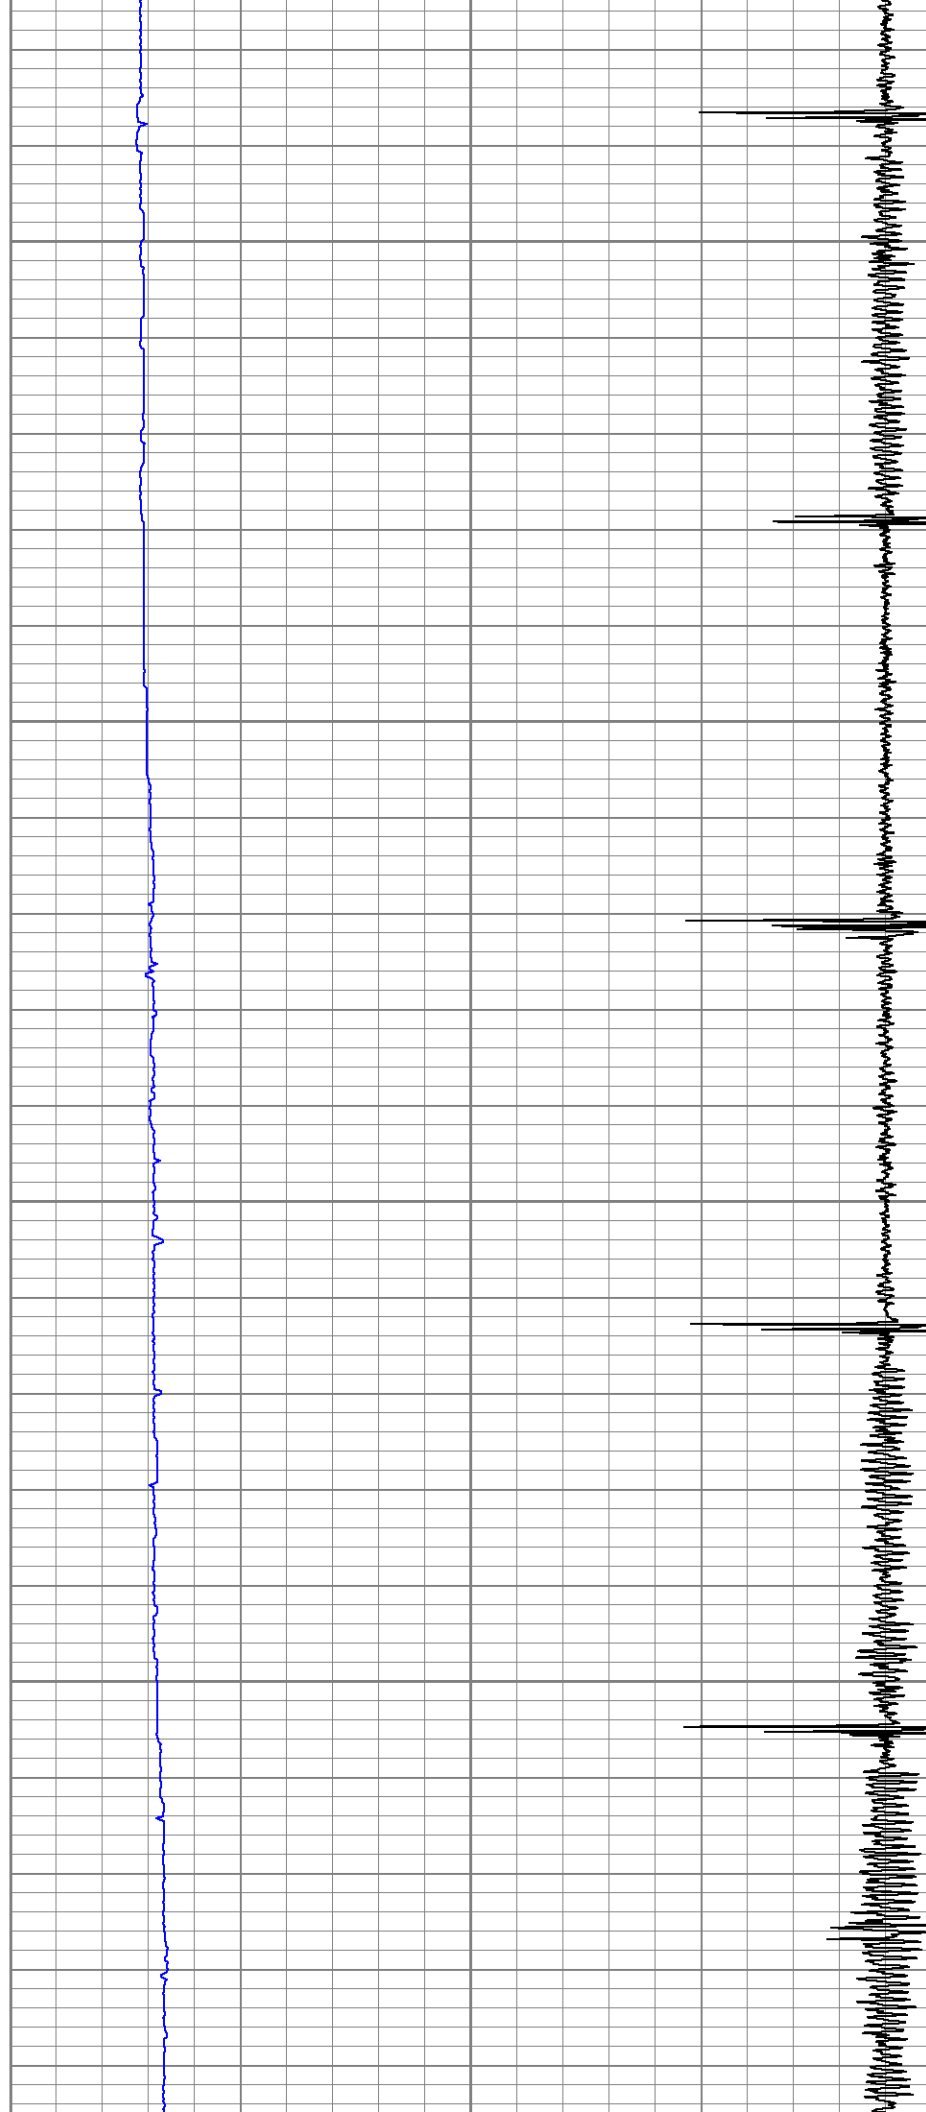

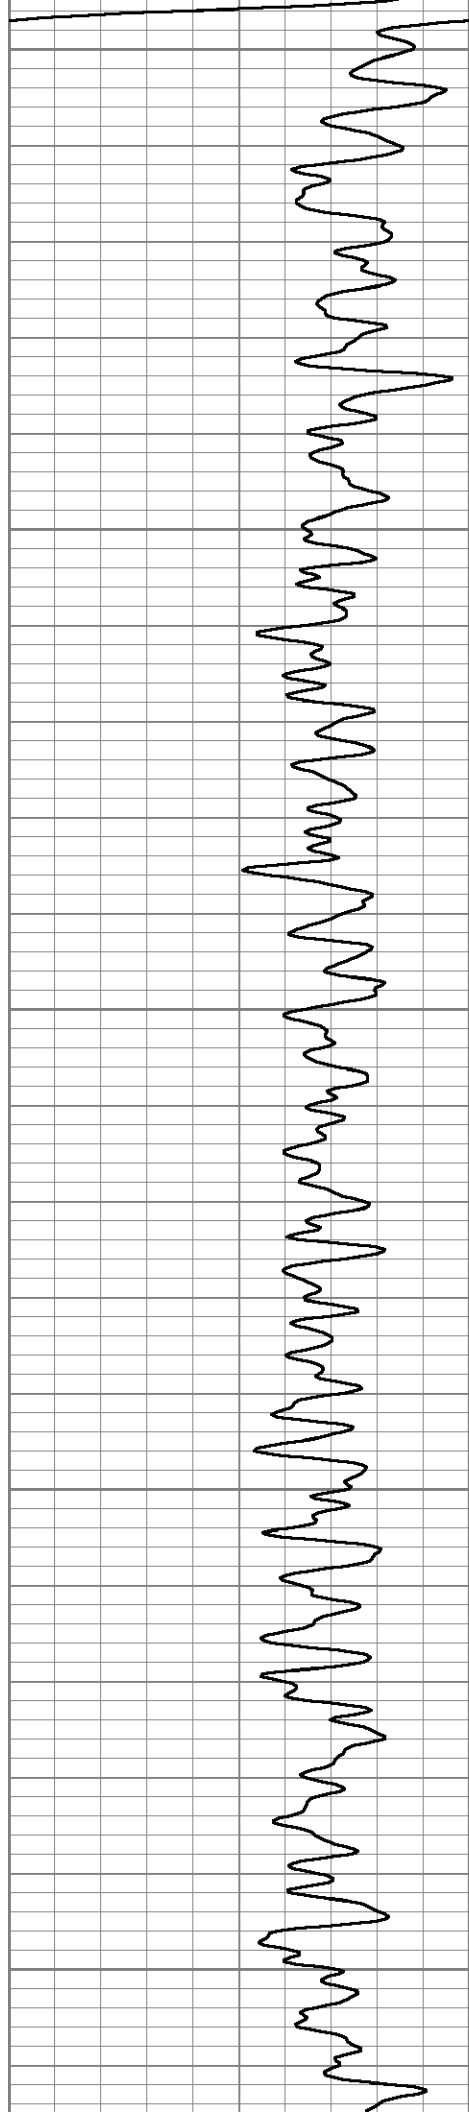



1300


1350

1400

1450

1500

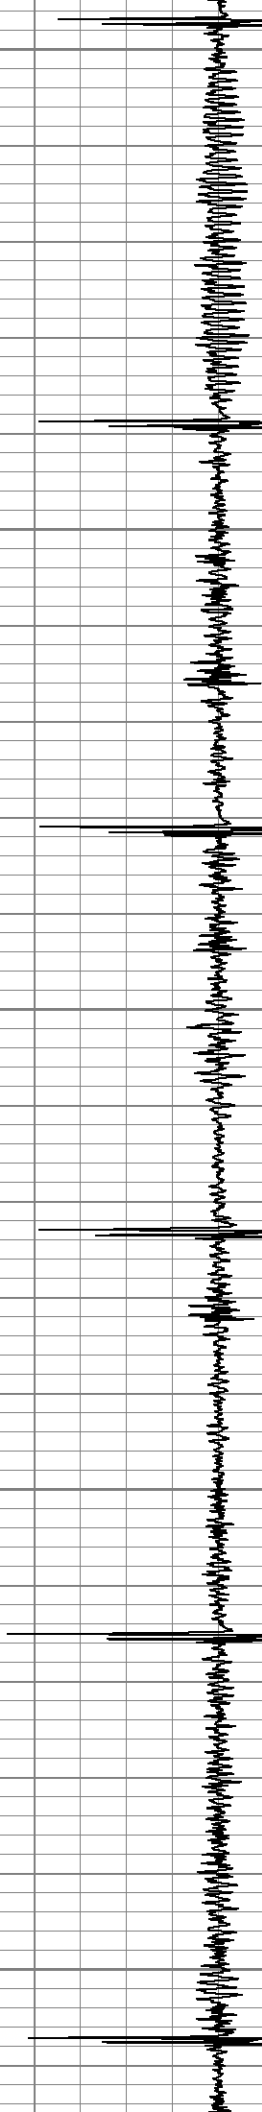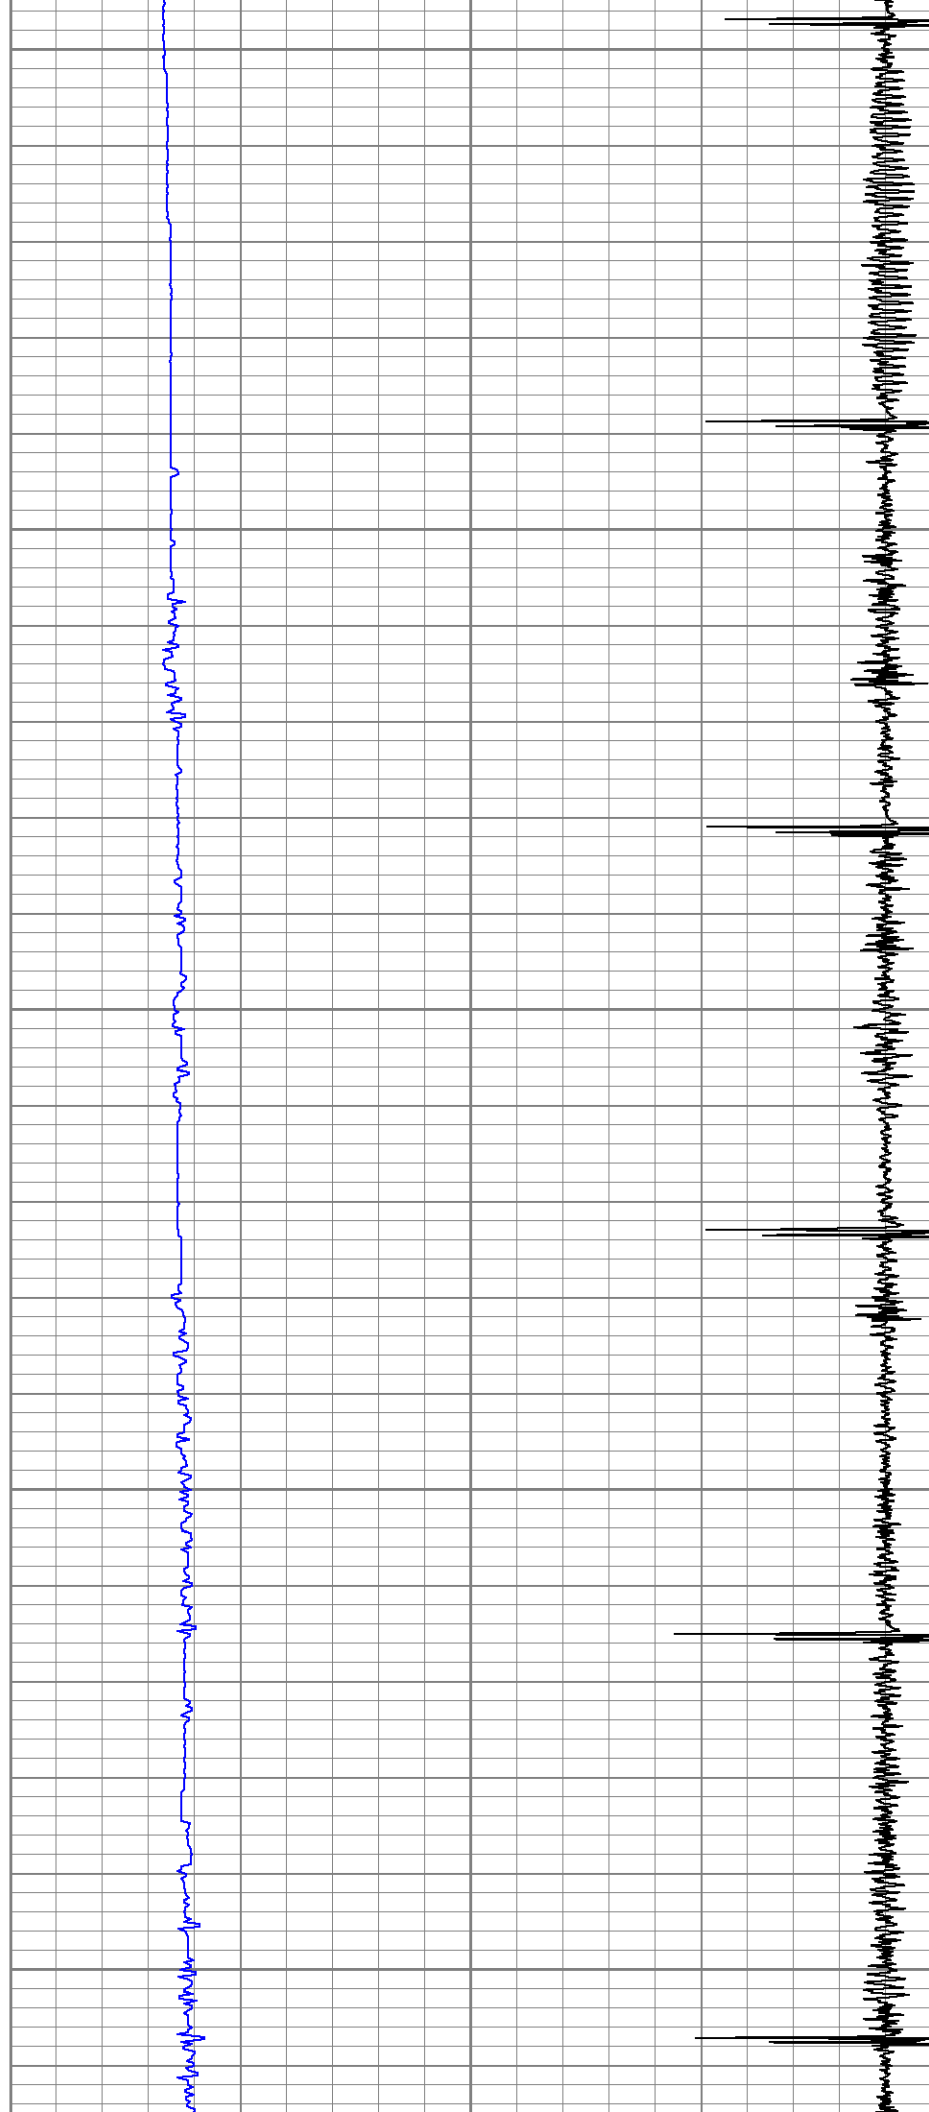

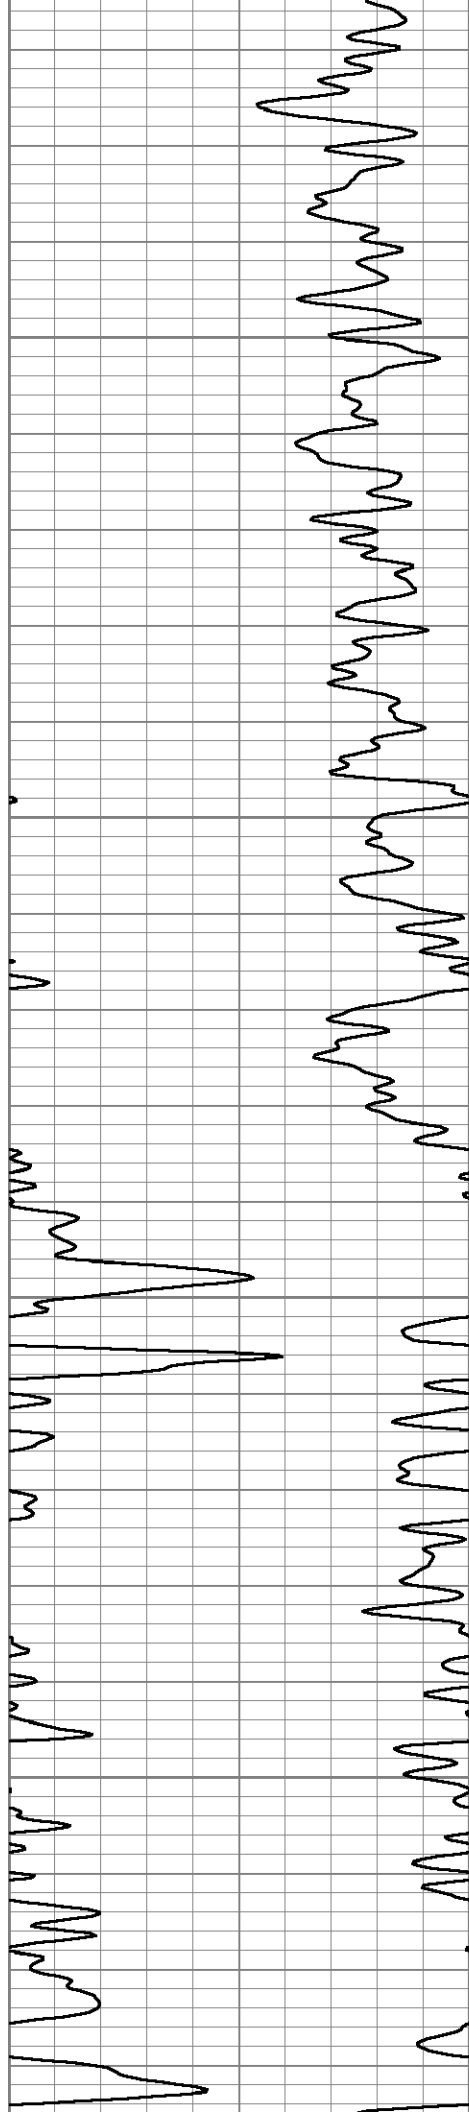



1550

1600

1650

1700

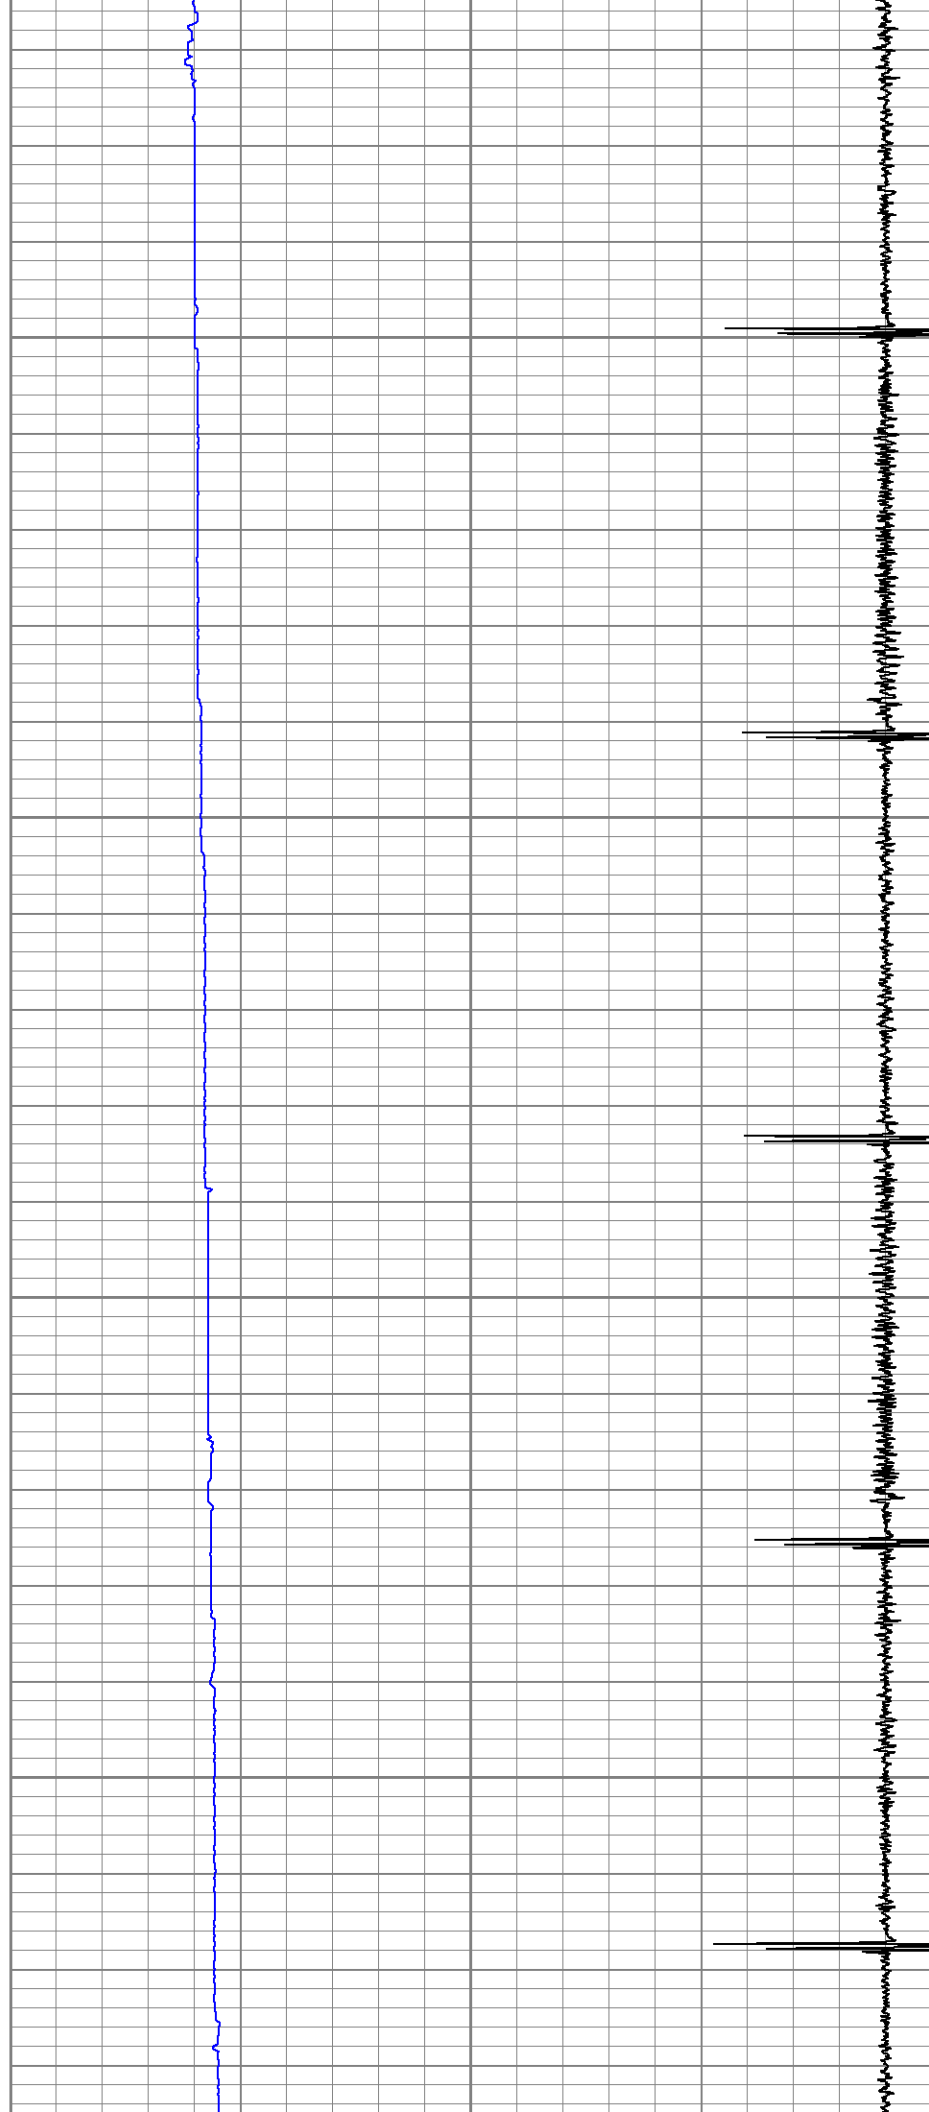

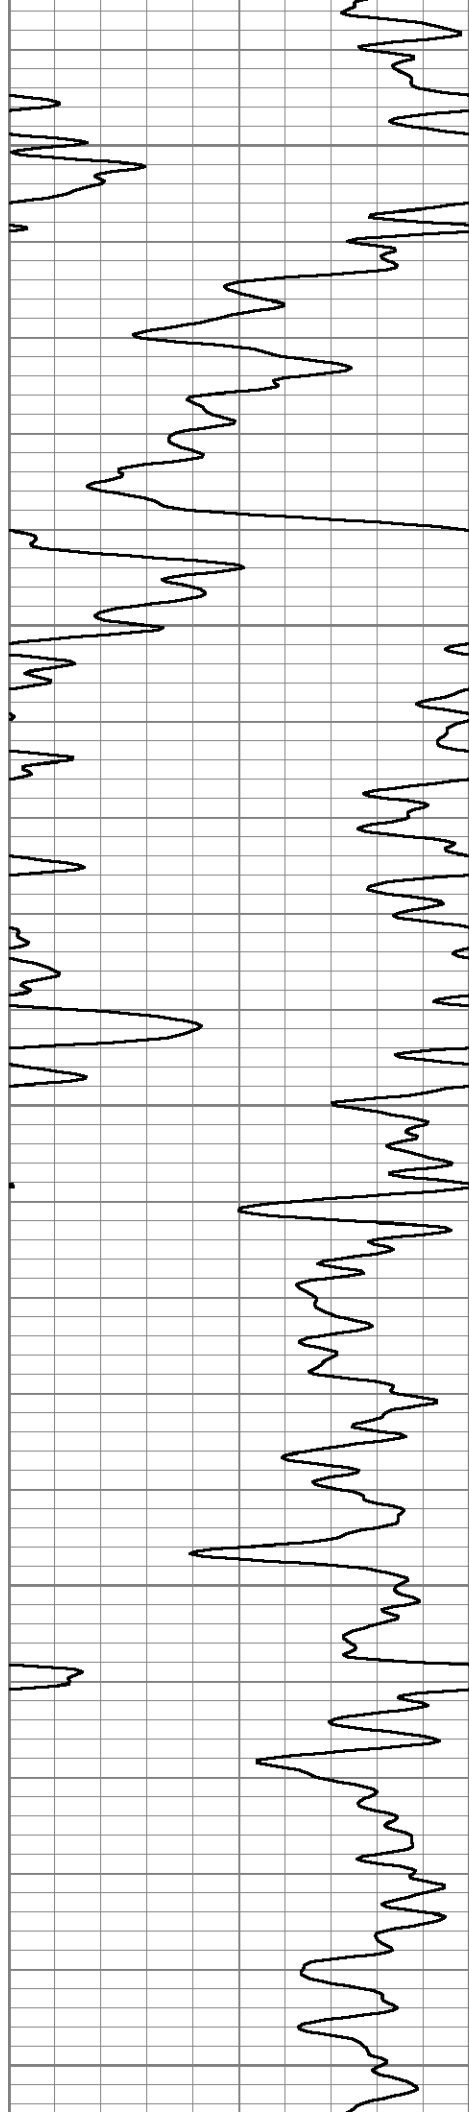


1750


1800

1850

1900

1950

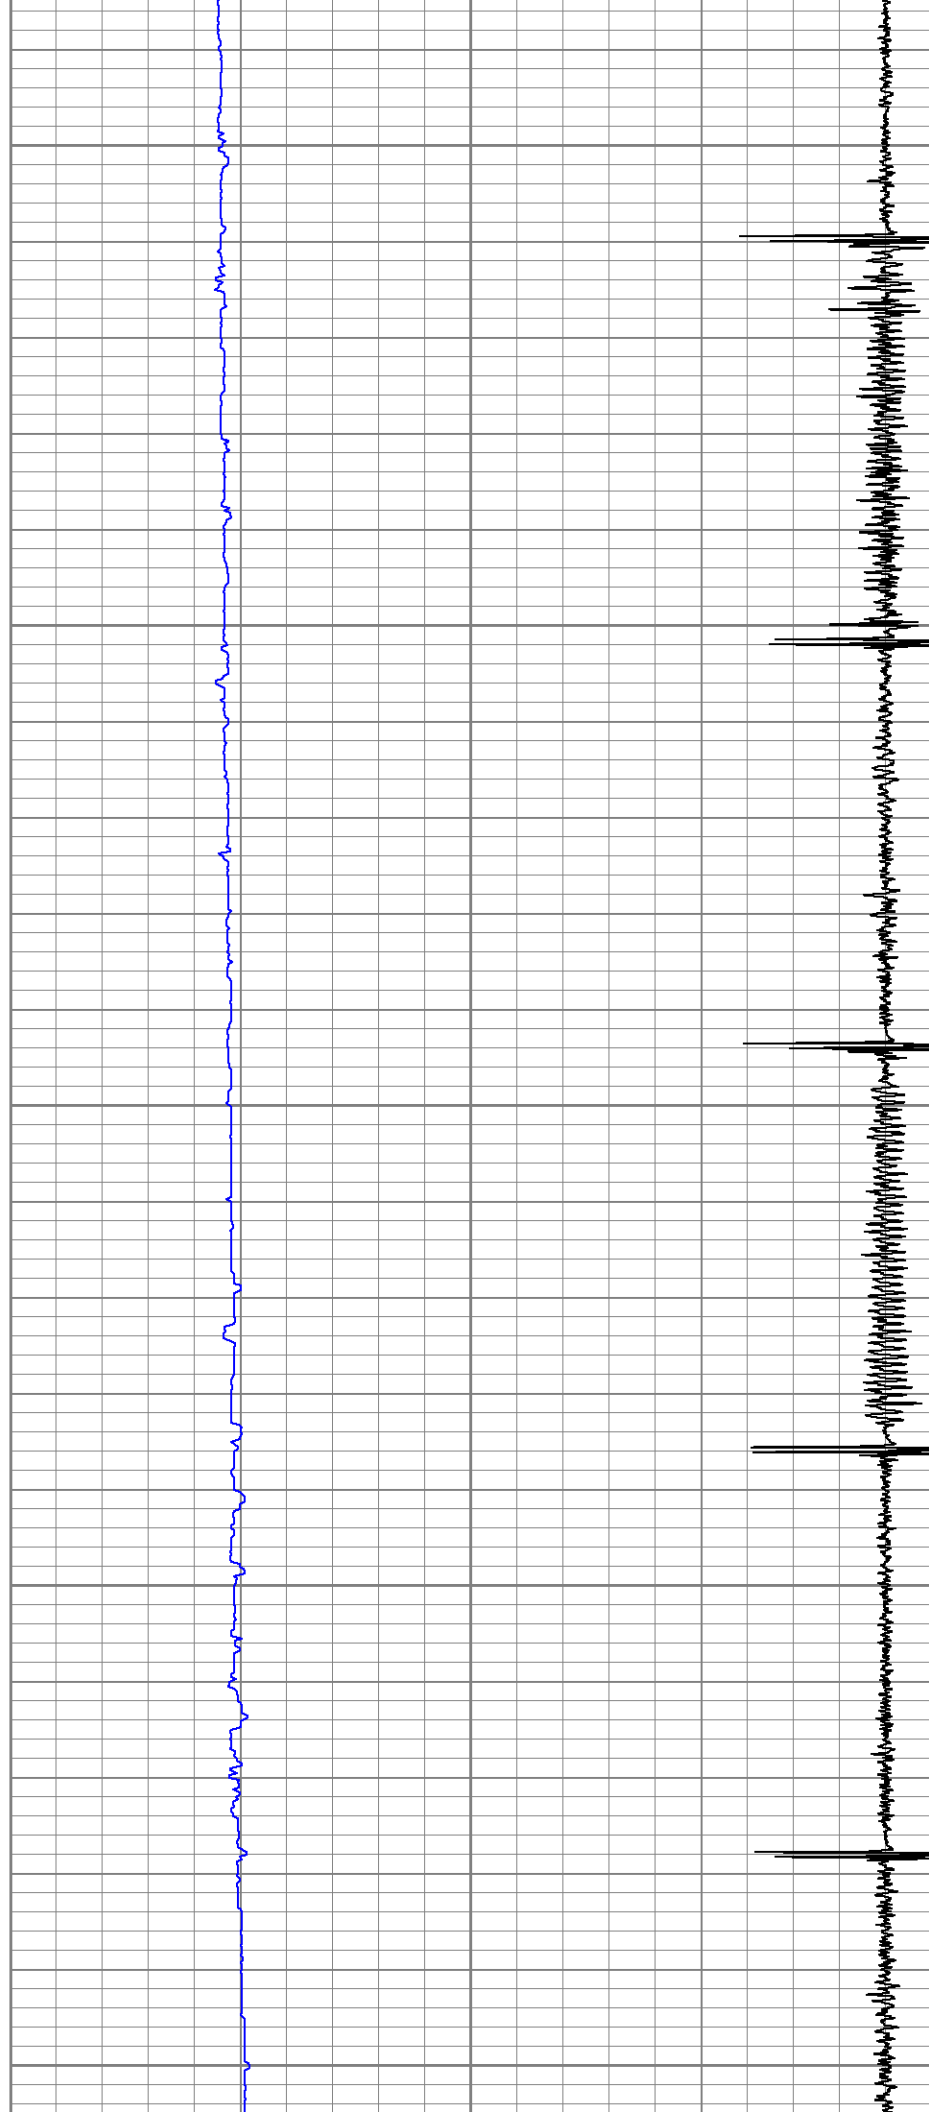

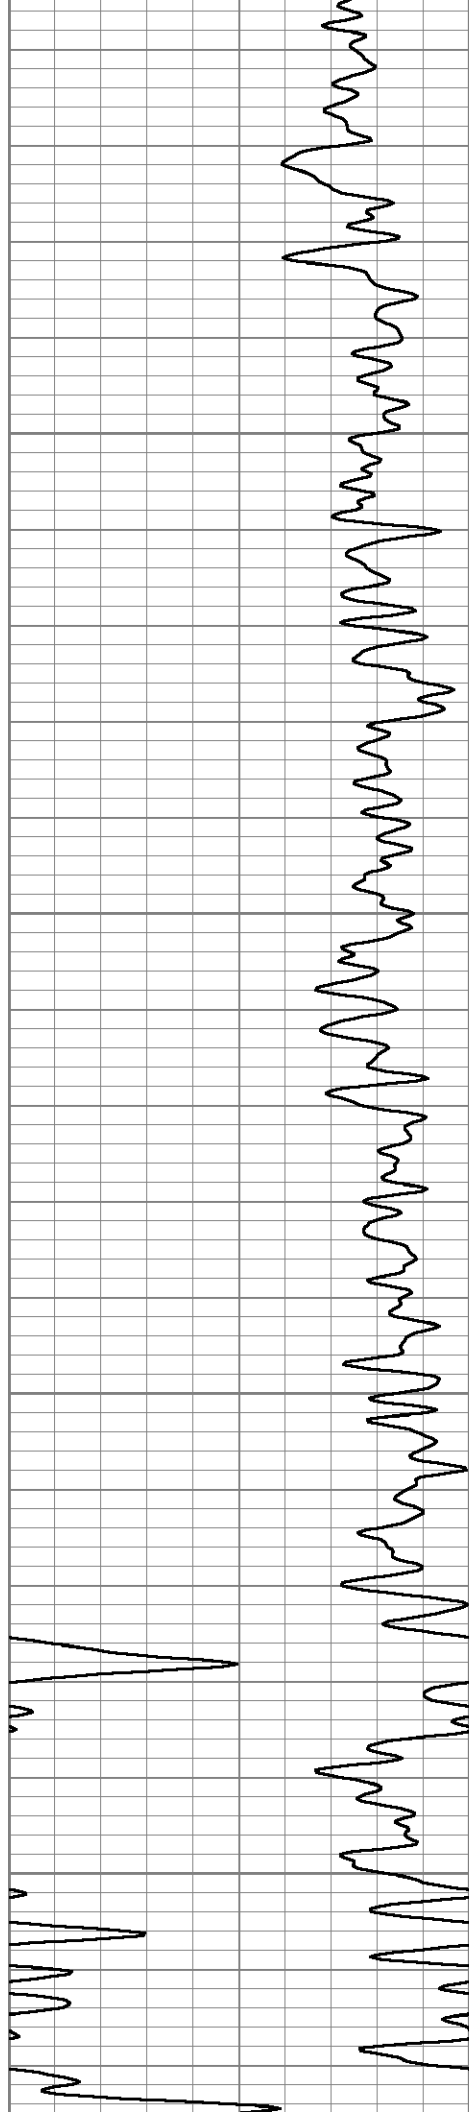



2000

2050

2100

2150

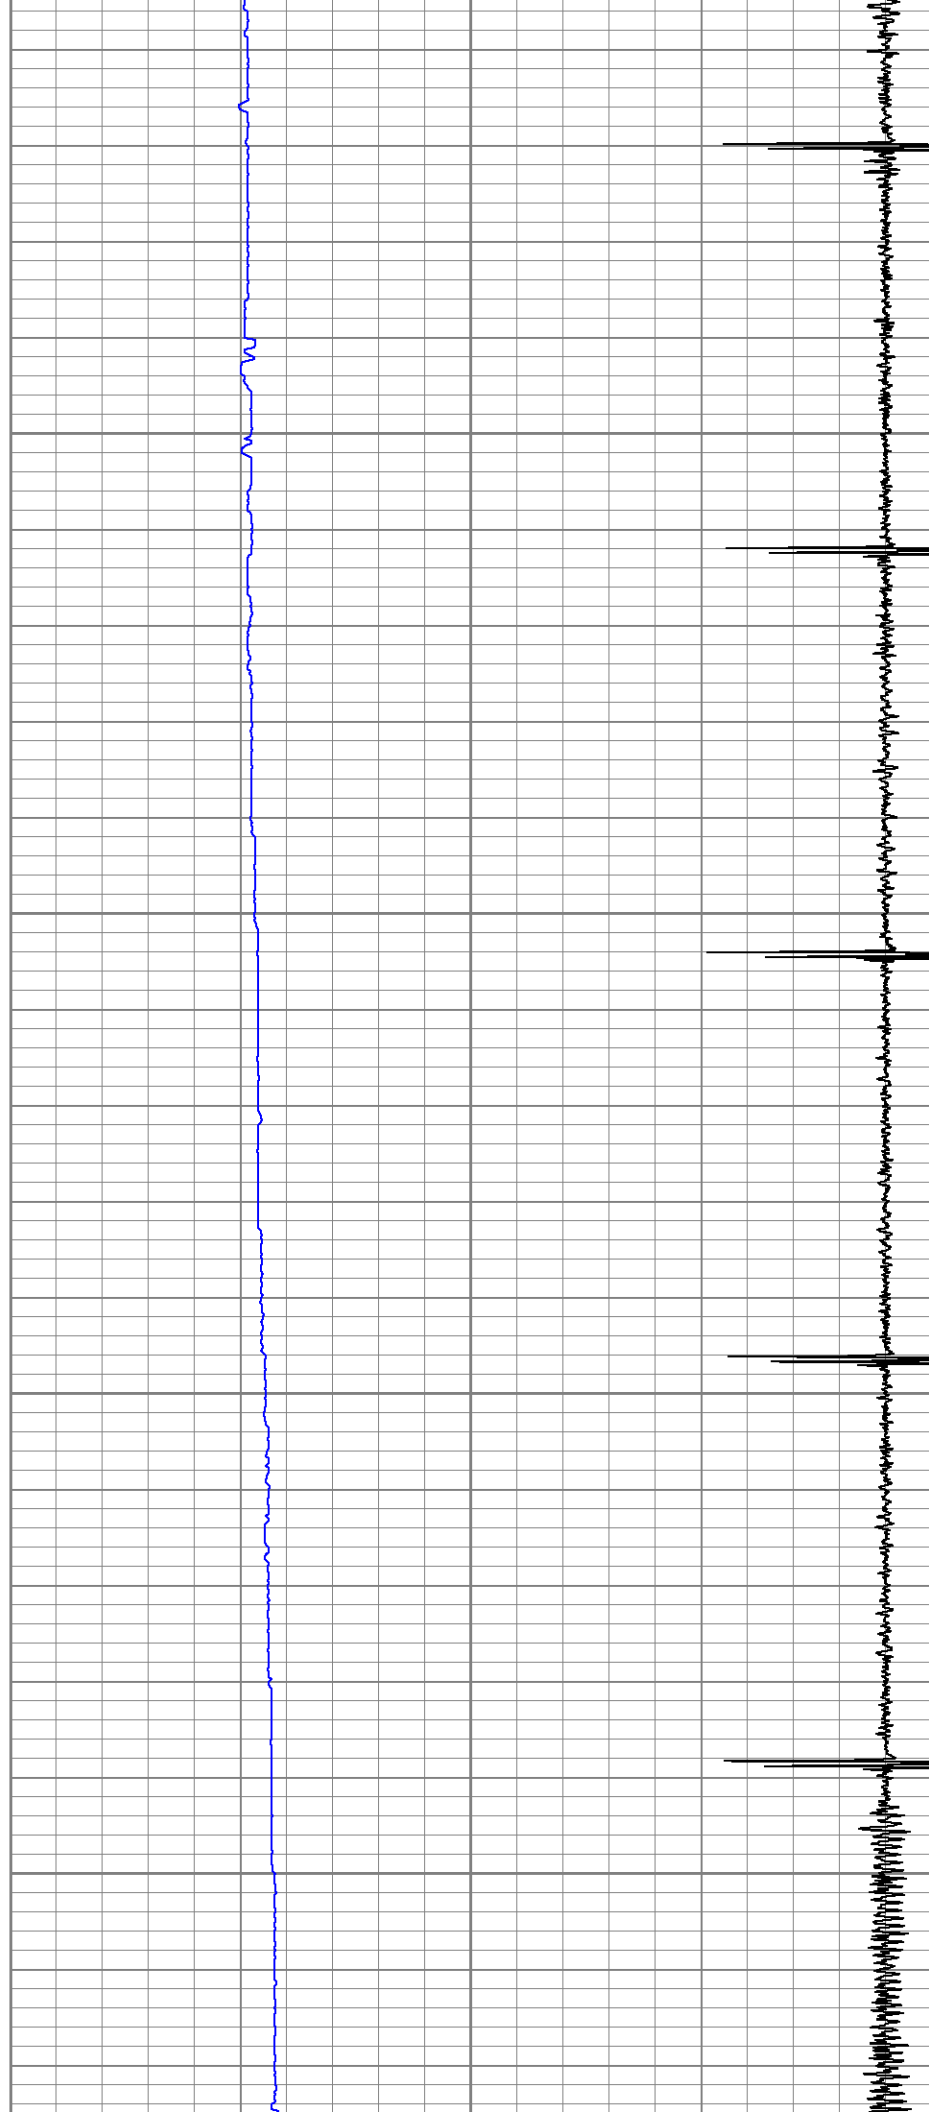

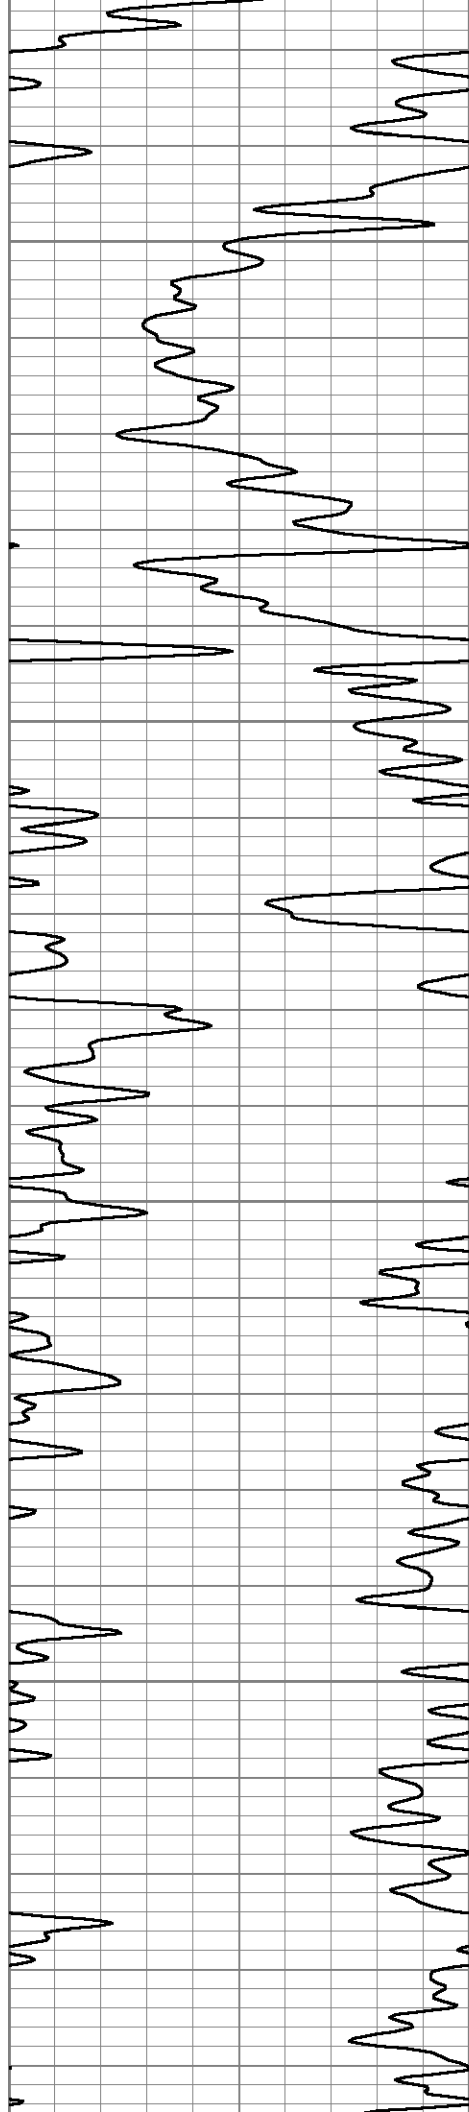



2200

2250

2300

2350

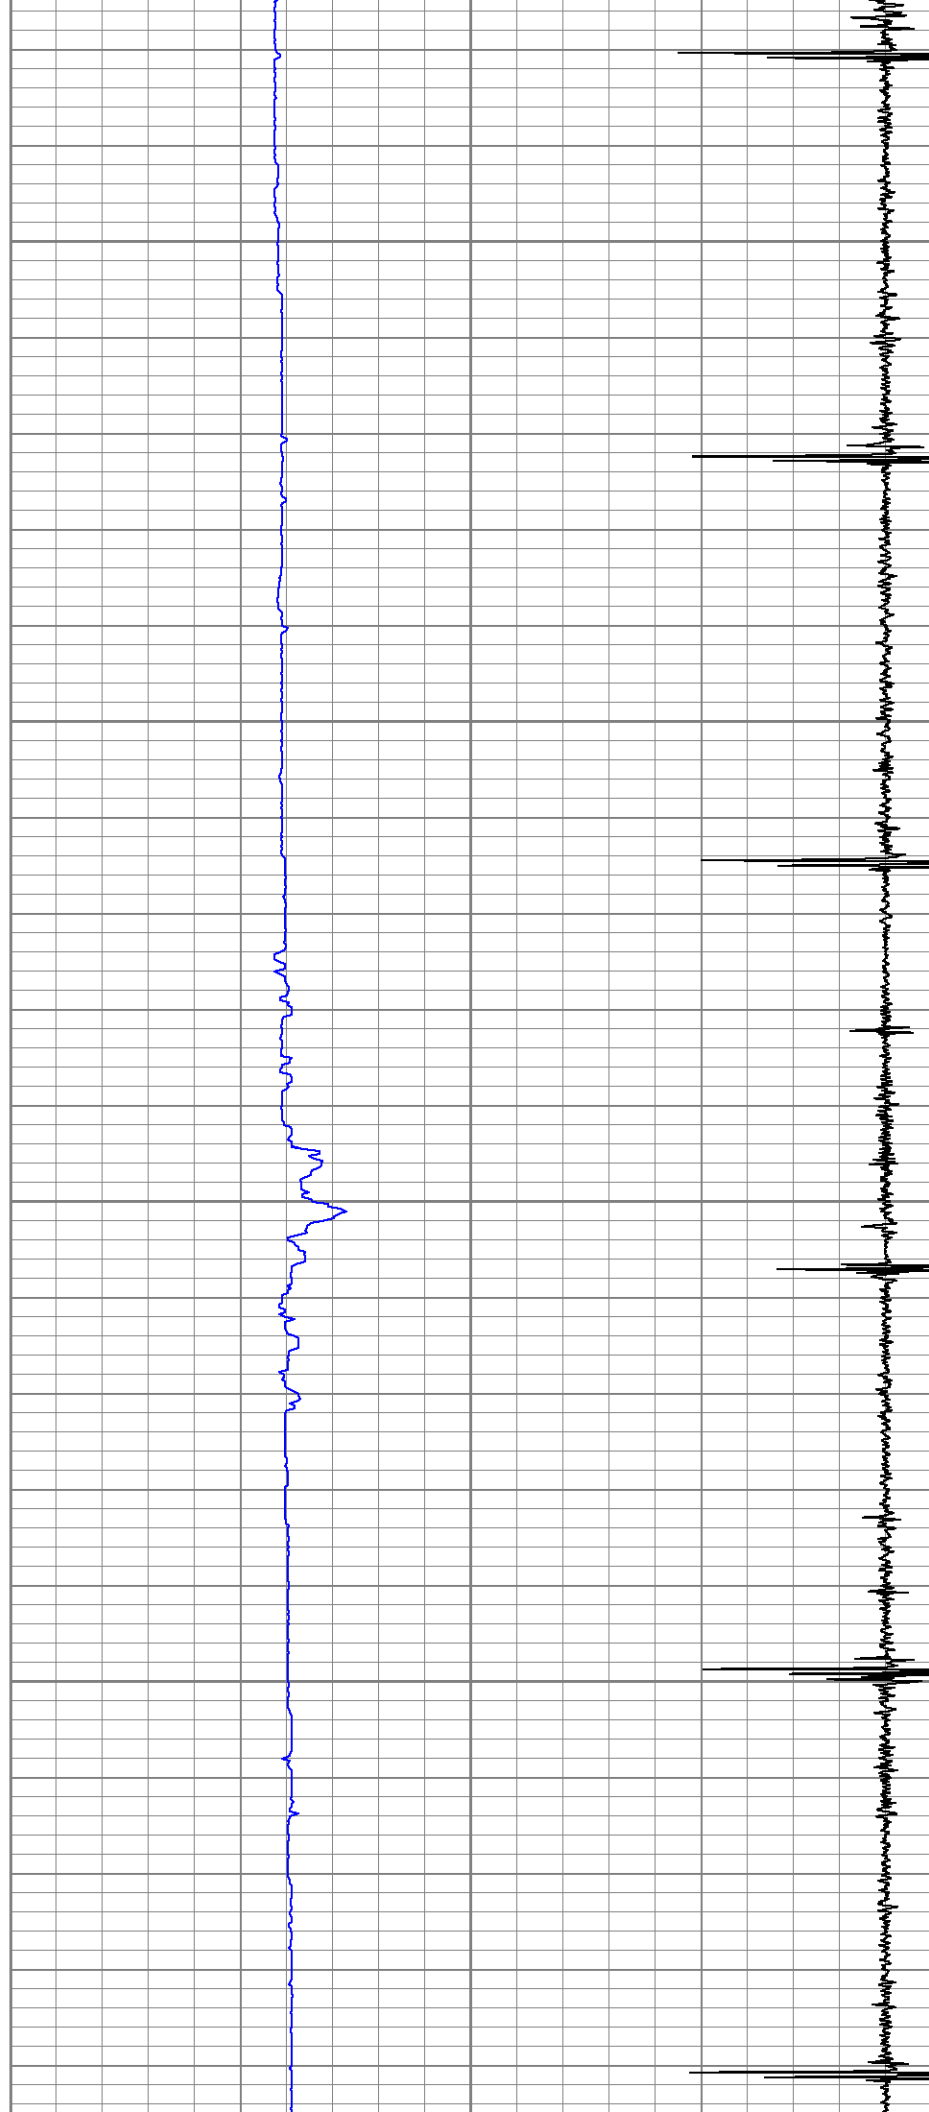

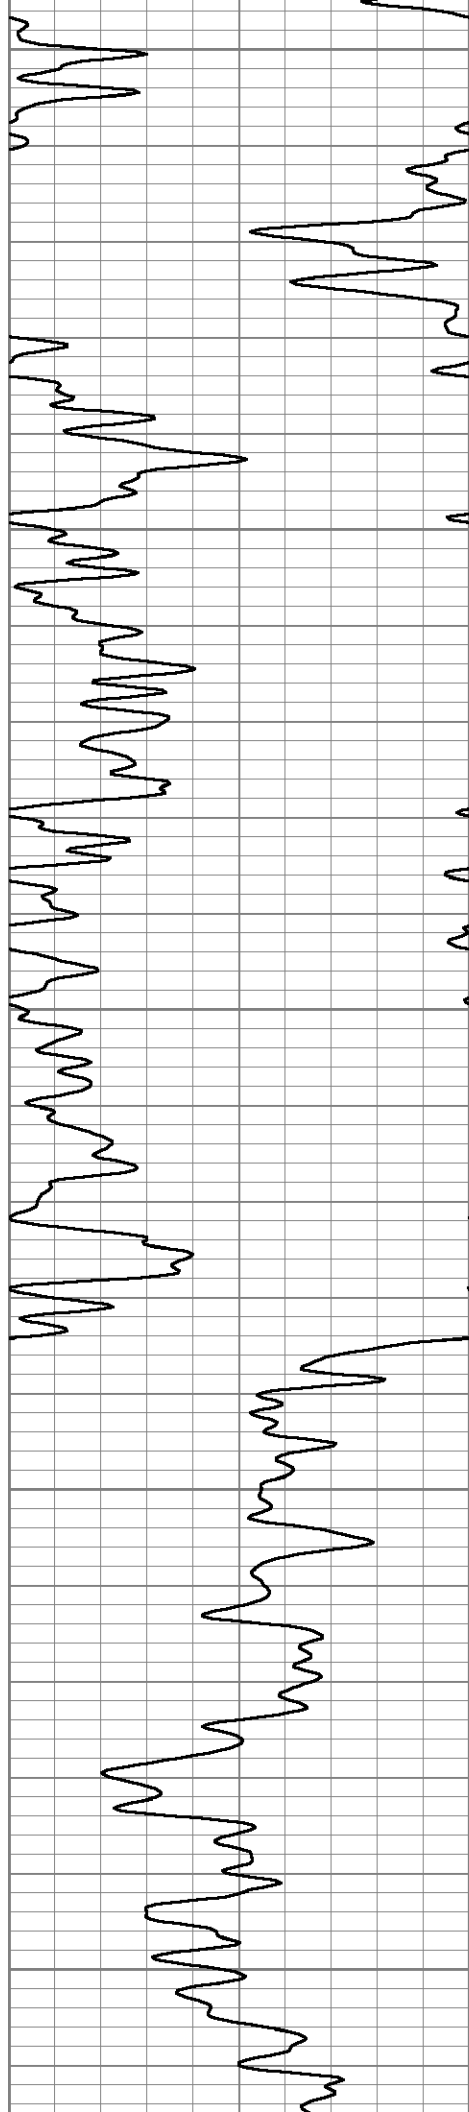


2400


2450

2500

2550

2600

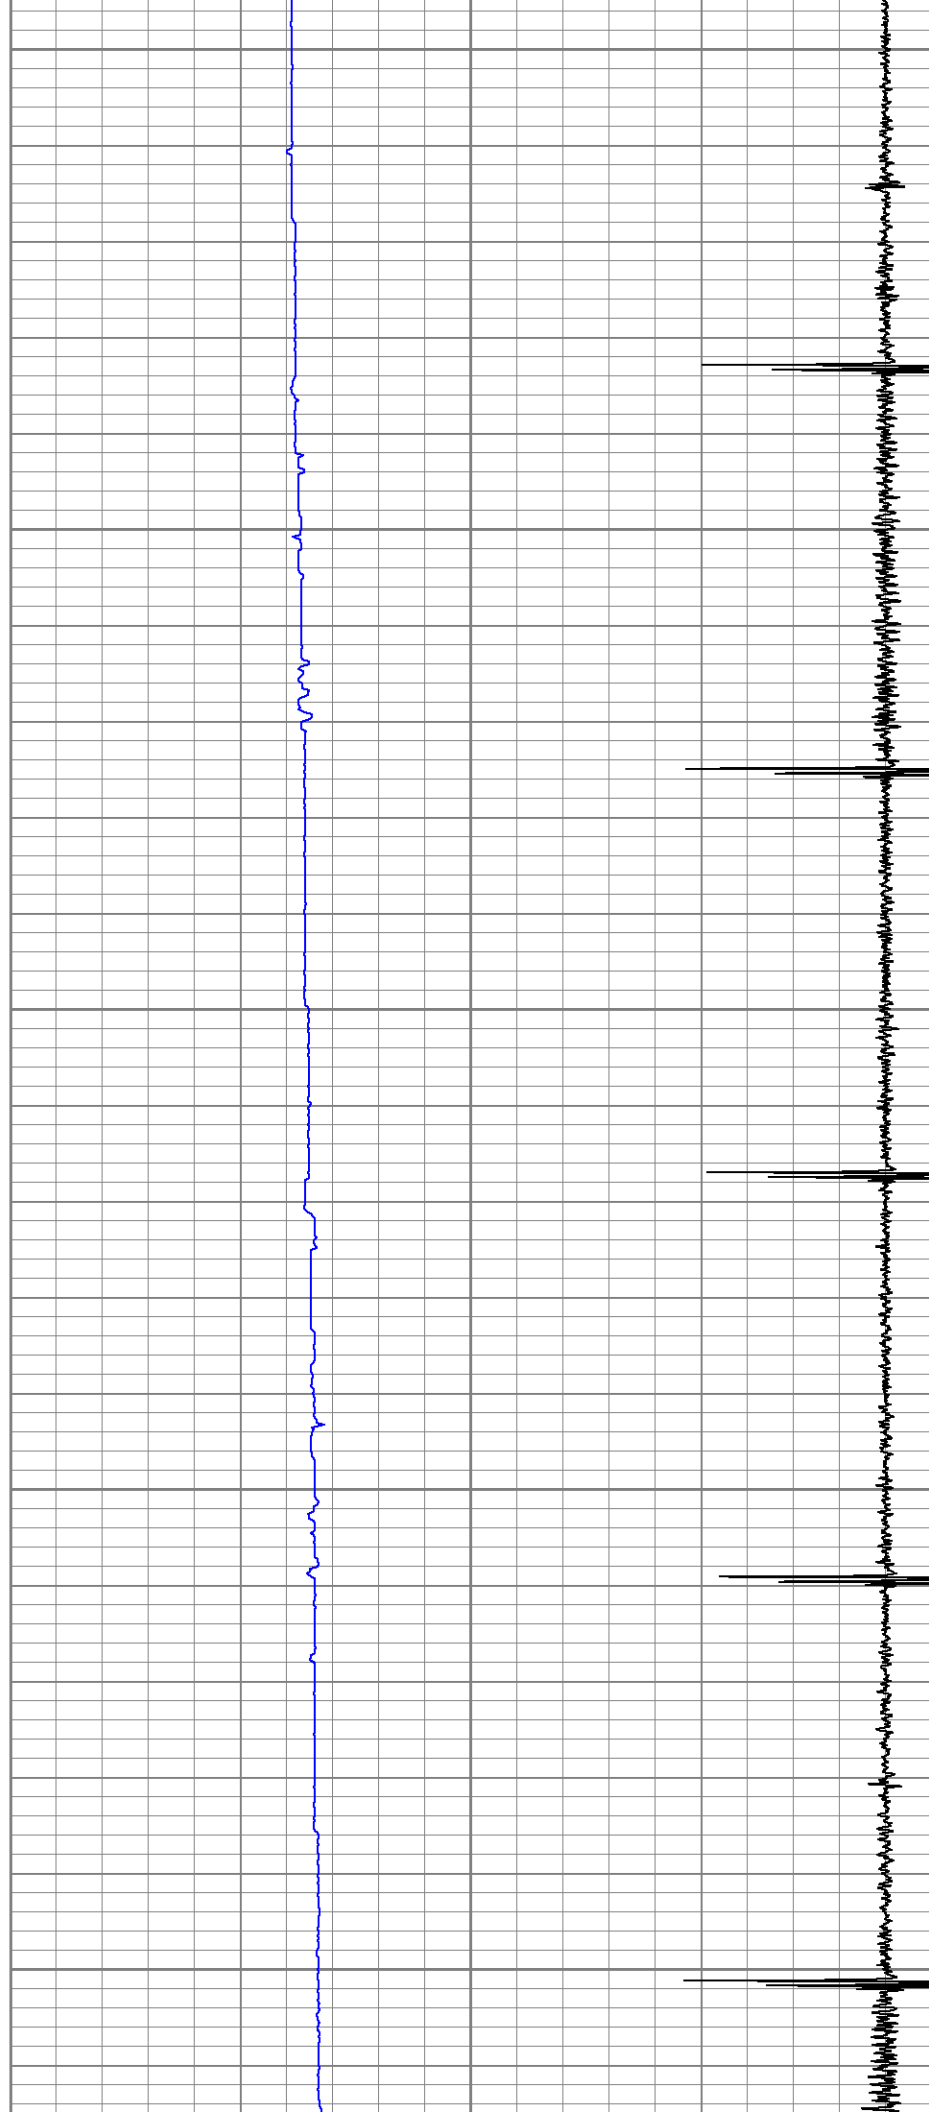

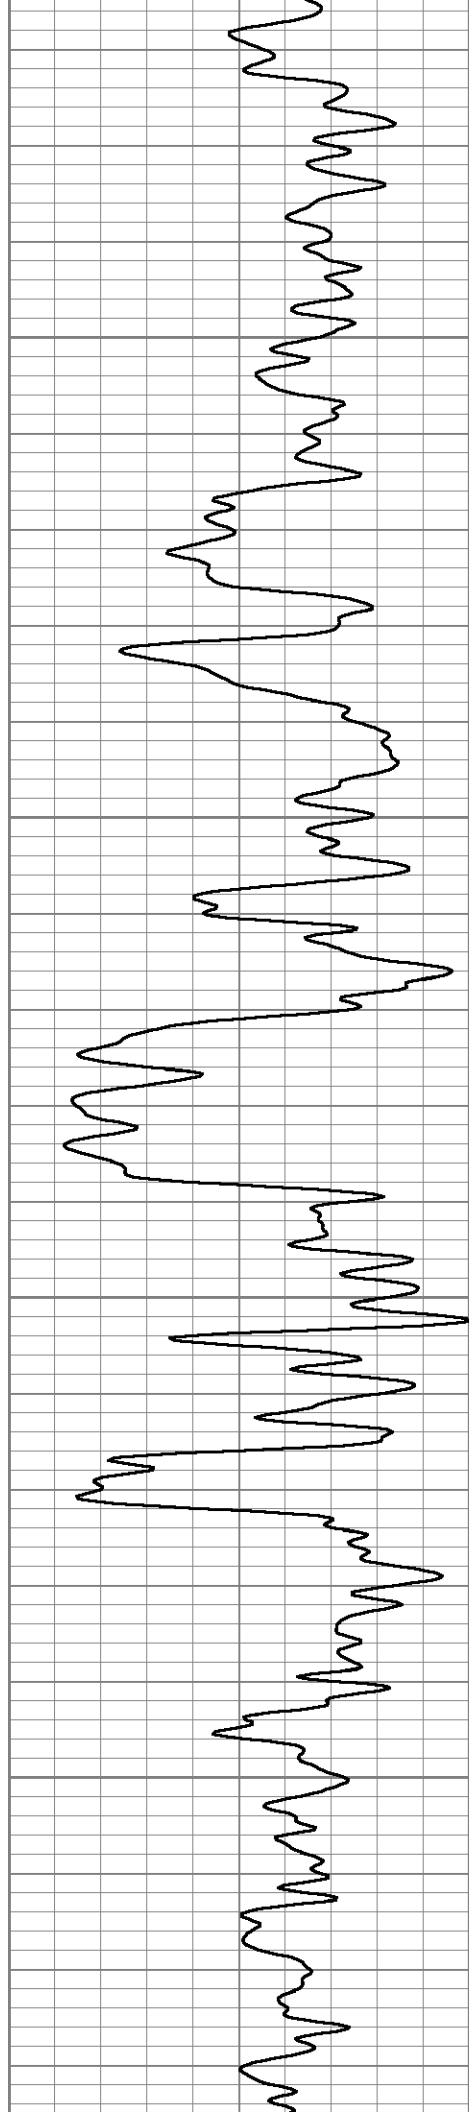



2650

2700

2750

2800

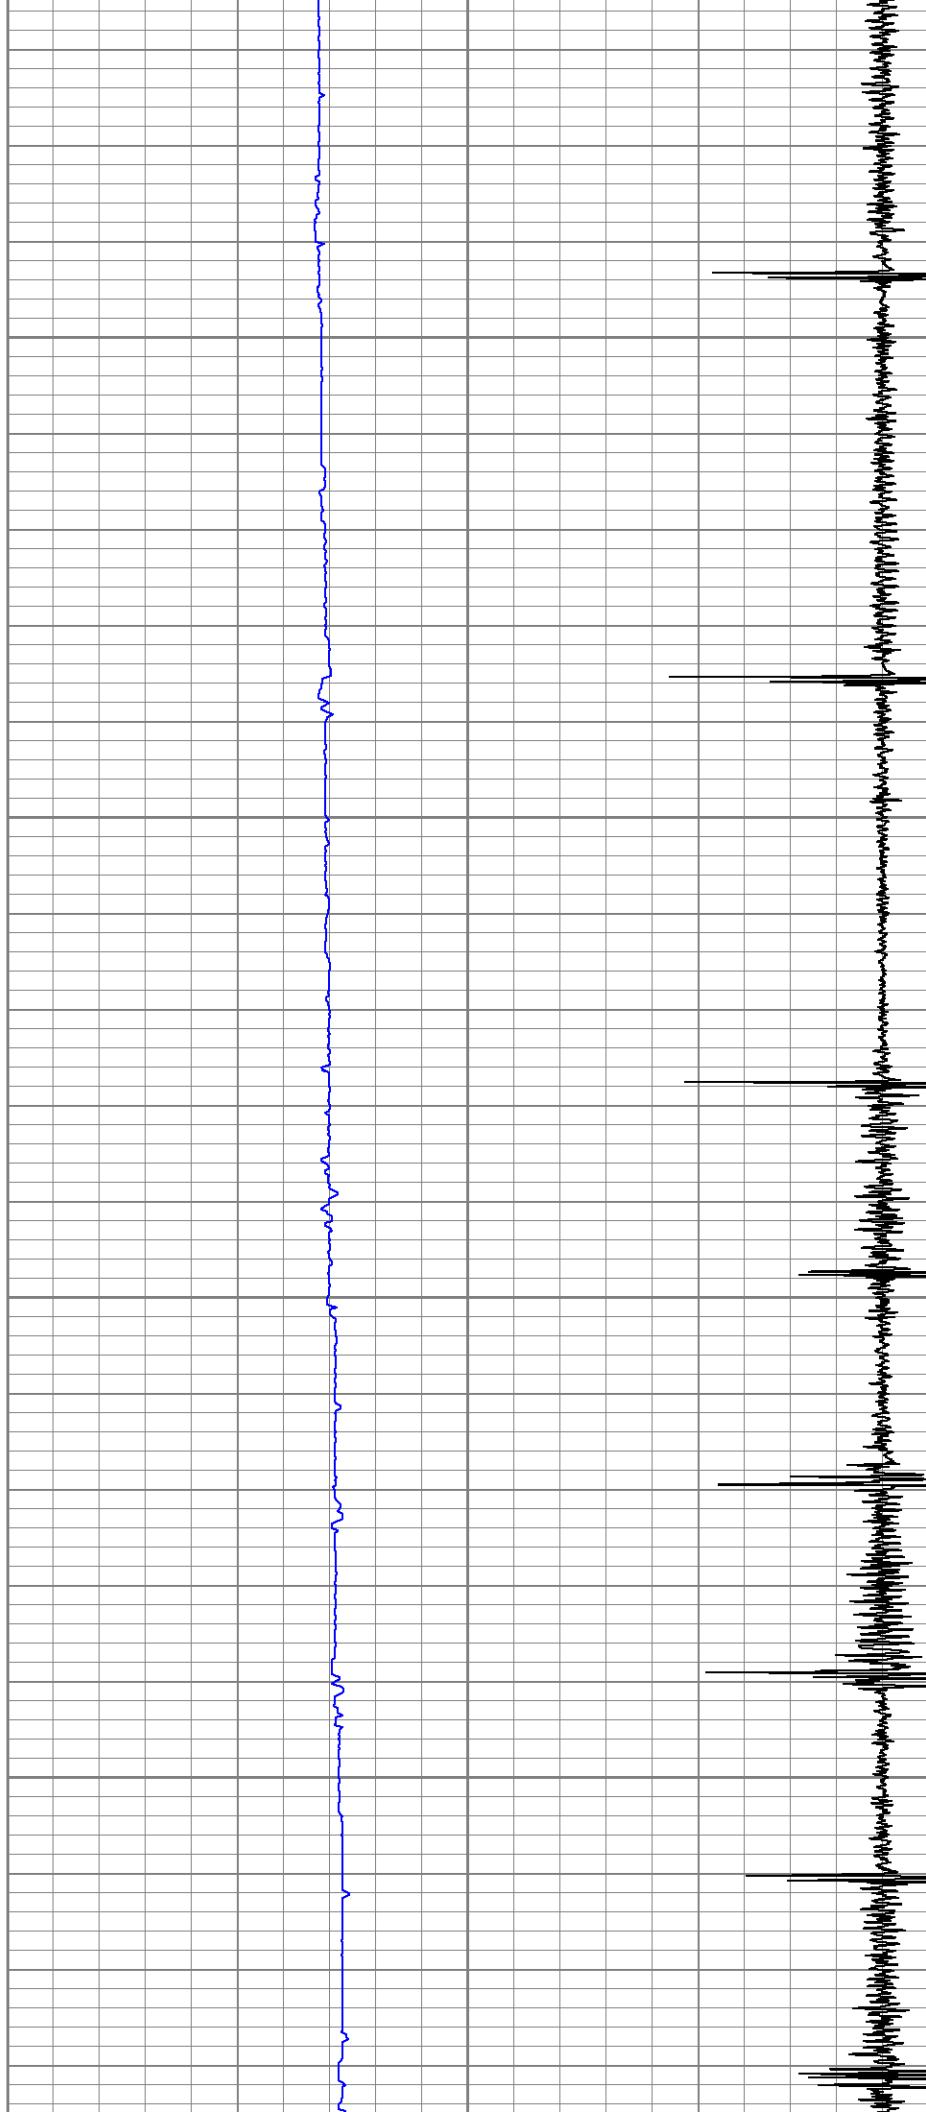

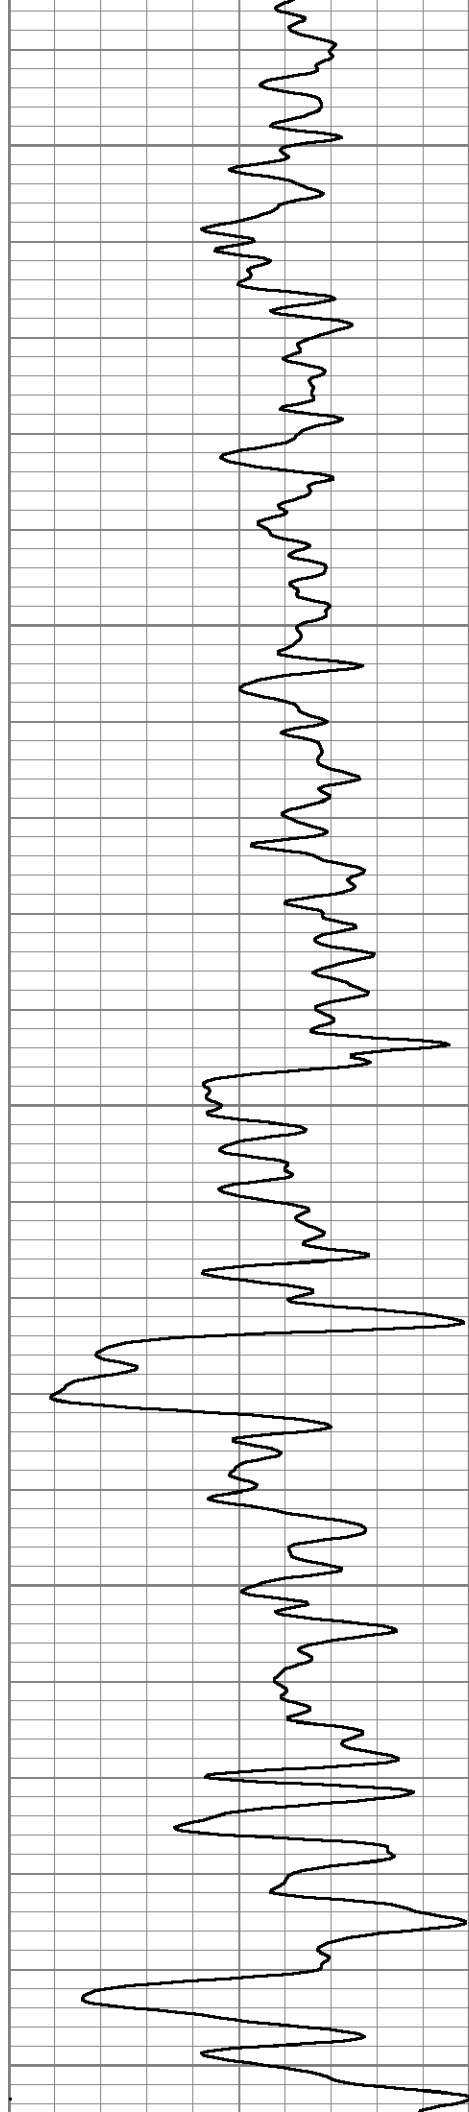


2850


2900

2950

3000

3050

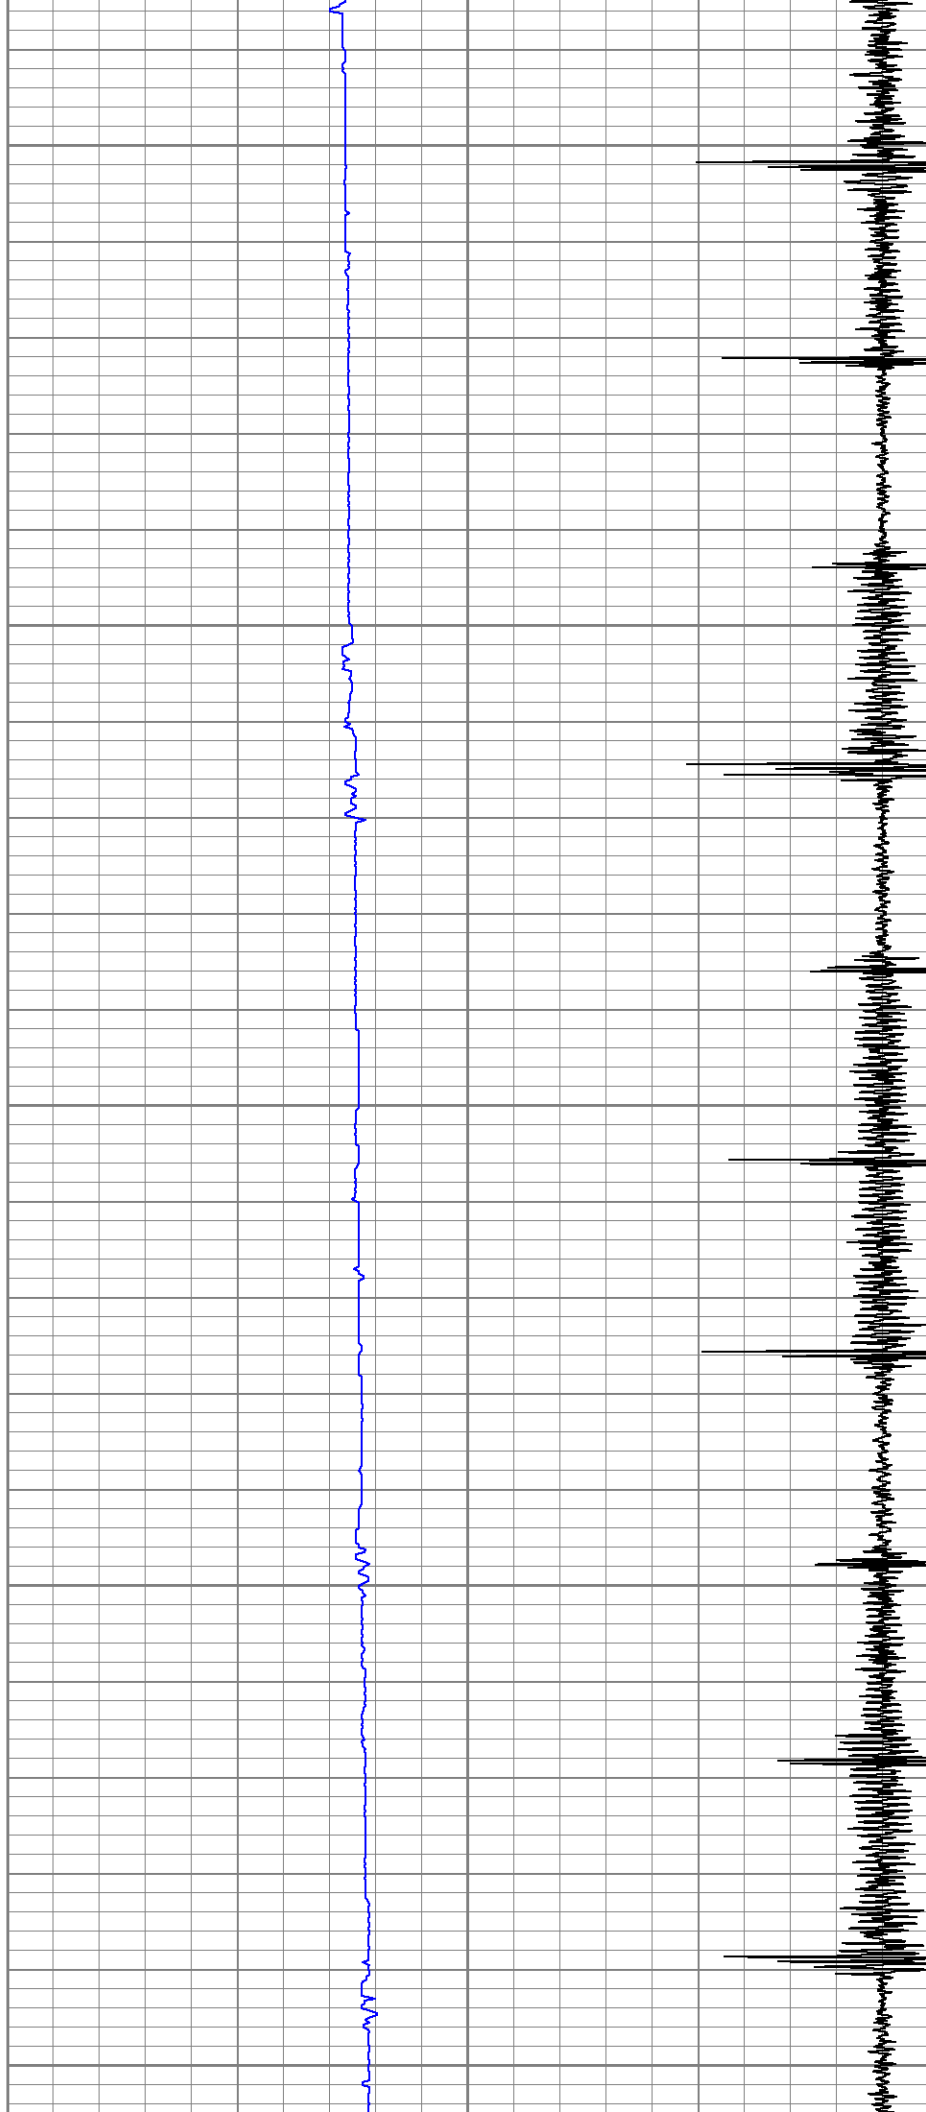

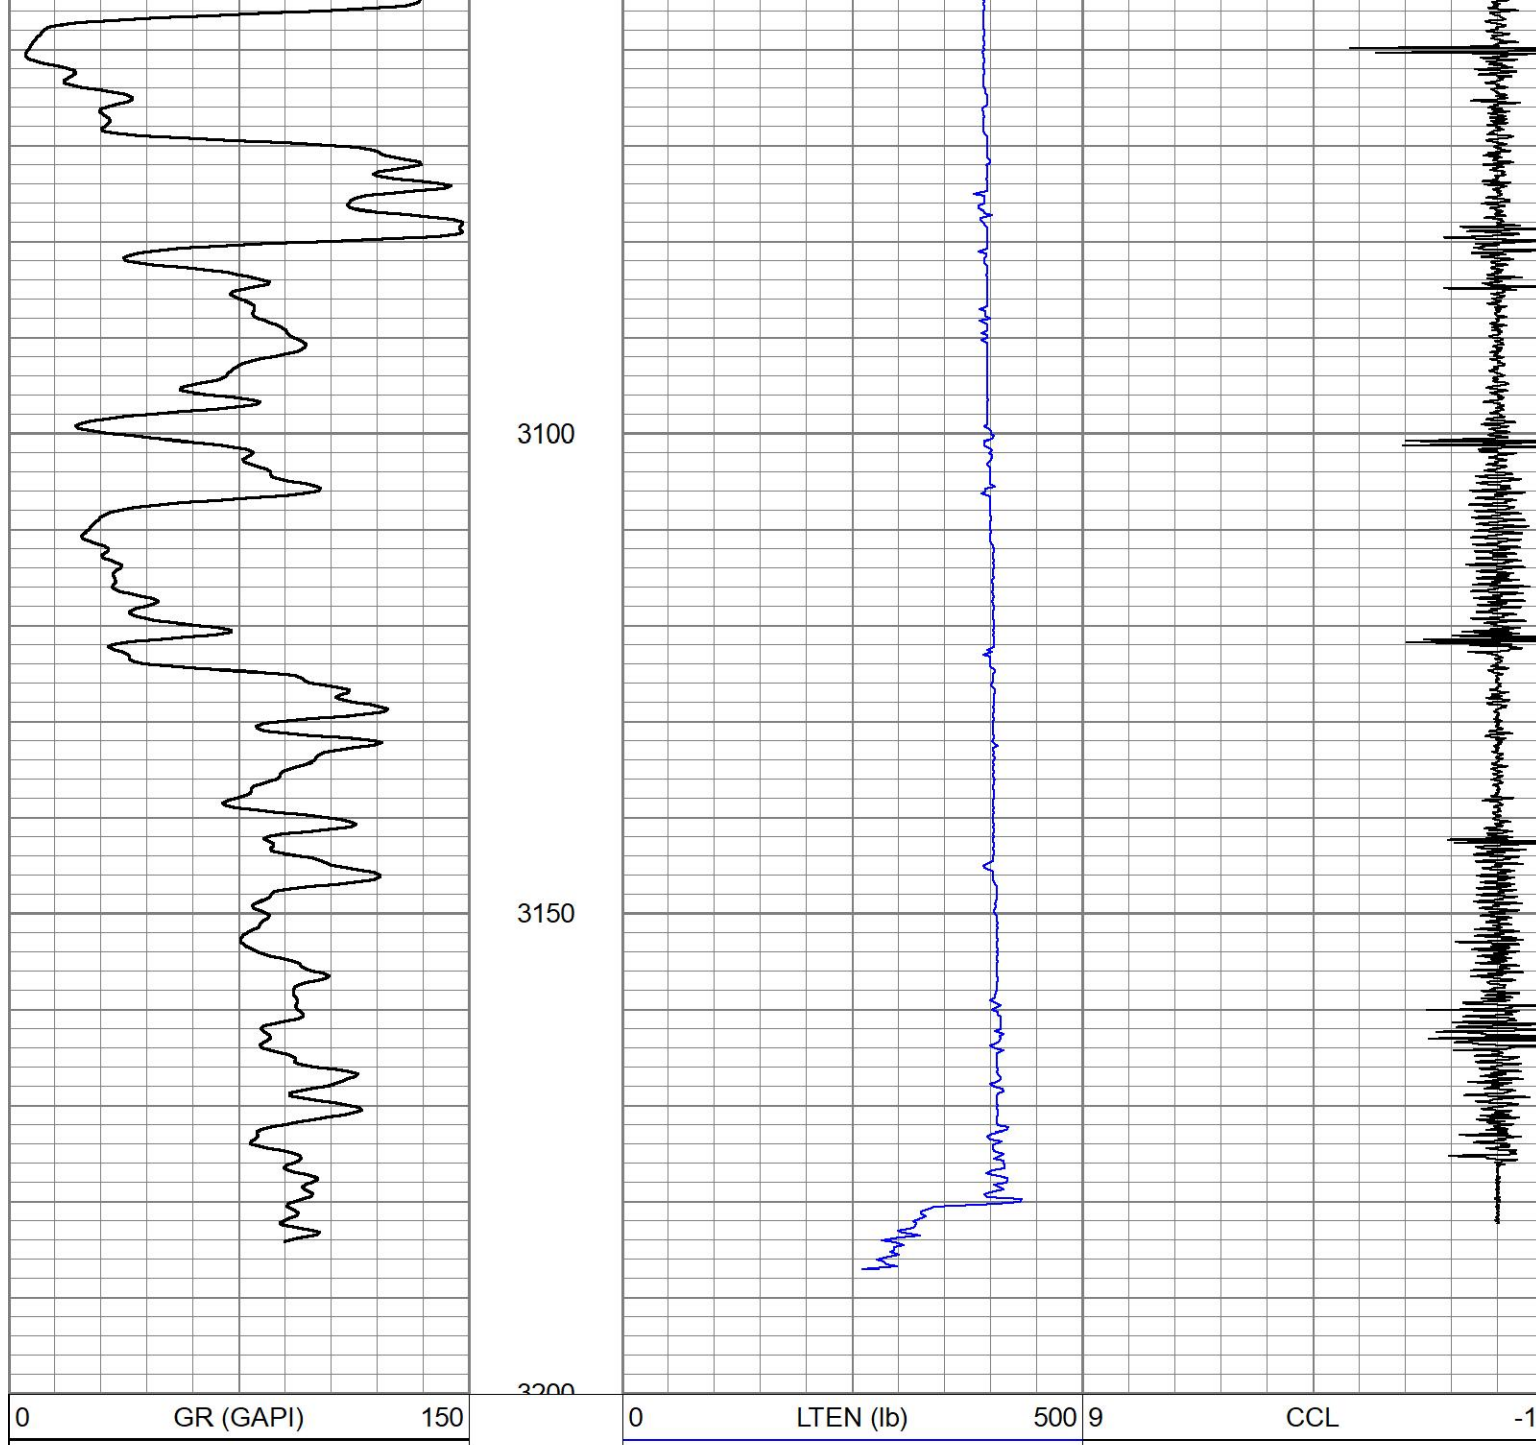

MAIN PASS

Sensor	Offset (ft)	Schematic	Description	Length (ft)	O.D. (in)	Weight (lb)
			CHD-STNDRD Standard Cable Head	1.00	1.44	1.00

