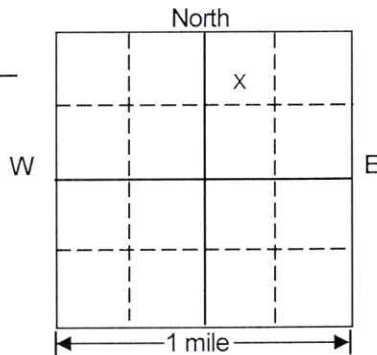


SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT

11-02

Location NW 1/4 NE 1/4 Sec 8 Twp 125N Rg 50W

County

RobertsPlease mark well
location with
an "X"Plugging Completion Date 4/23/2026Well Owner: Roberts County LandfillName: Roberts CountyAddress: 12149 463rd AvenueCity, State, Zip: Sisseton SD 57262

Comments:

Plugged well GW4. See attached map and log.
Roberts County Landfill
GeoTek #94-002

CHECK APPROPRIATE BOX

EXISTING WELL ☒TEST HOLE ☐Well depth 15'Casing material PVCCasing size(s) 2"Casing condition Good

Hole depth _____

Hole size _____

Describe plugging procedure:

Well was plugged with bentonite to top of riser. The protective cover was removed and void filled with soil.

Describe grout or plugging material:

Granular bentonite

Type of non-slip plug: _____

This well or test hole was plugged under license # 552 and this report is true and accurate.Drilling firm: GeoTek Engineering & Testing Services, Inc.Signature of Licensed Representative: [Signature]

Signature of Well Owner: _____

Date: 4-27-26

RECEIVED

MAY 07 2026

OFFICE OF
WATER

Roberts County Landfill

Sisseton, SD

SB19 ▲ SB18 ▲

SB17 ▲ SB16

GW24 ▲ GW20 ▲ GW-2

GW21 ▲ GW25 ▲ GW-14

GW23 ▲ GW22

SB15

121st St

GW-11

121st St

GW-15

GW-17

GW-18

SG-1

SG-2

GW-4R

GW-4

GW-12

SW-10

GW-8

GW-1S

SW-8

GW-9

GW-16

GW-13

GW-7S

463rd Ave

463rd Ave

Google Earth

Image © 2025 Airbus

1000 ft





GOETEK ENGINEERING
& TESTING SERVICES, INC.
501 East 52nd Street North
Sioux Falls, South Dakota 57104
605/335-5512

ENVIRONMENTAL TEST BORING LOG

JOB# 94-002		VERTICAL SCALE 1" = 4'		BORING # MW 4 (GW4)			
PROJECT ROBERTS COUNTY LANDFILL, SISSETON, SOUTH DAKOTA							
DEPTH IN FEET	DESCRIPTION OF MATERIAL 1" Surface Elevation	GEOLOGIC ORIGIN	SAMPLE DATA				PETROLEUM VAPOR READINGS (PPM)
			WL	N	NO	TYPE	
2	SILTY CLAY, black (CL)	OXIDIZED TILL			1	AUGER	
	SILTY CLAY, brown, soft, a few lenses of silty sand below 5' (CL)				2	AUGER	
6	SANDY CLAY, trace of gravel, brown, soft (CL)			4	3	SB	
				2	4	SB	
9 1/2	SILTY SAND, medium grained, a little gravel, brown, water- bearing, very loose (SM)	UNOXIDIZED TILL		2	5	SB	
12	SILTY CLAY, brown and light gray mottled, soft (CL)			4	6	SB	
15	END OF BORING *See Monitoring Well Data Sheet						

RECEIVED
MAY 07 2026
**OFFICE OF
WATER**

WATER LEVEL MEASUREMENTS				
DATE	TIME	WATER LEVEL	ELEVATION OF WATER	CAVE-IN DEPTH
		*		

Date Started 2-15-94

Date Finished 2-15-94 @ 3:00

Method of Drilling 3 1/4" HSA: 0-15'

Crew Chief Hagedorn

MONITORING WELL INSTALLATION DATA

PROJECT: ROBERTS COUNTY LANDFILL
SISSETON, SOUTH DAKOTA

PROJECT #: 94-002

INSTALLATION COMPLETED


MONITORING WELL #: GMW-4

DATE: 2-15-94

GROUND ELEVATION: 1212.38'

TIME: 3:20

TOP OF RISER ELEVATION: 1214.58'

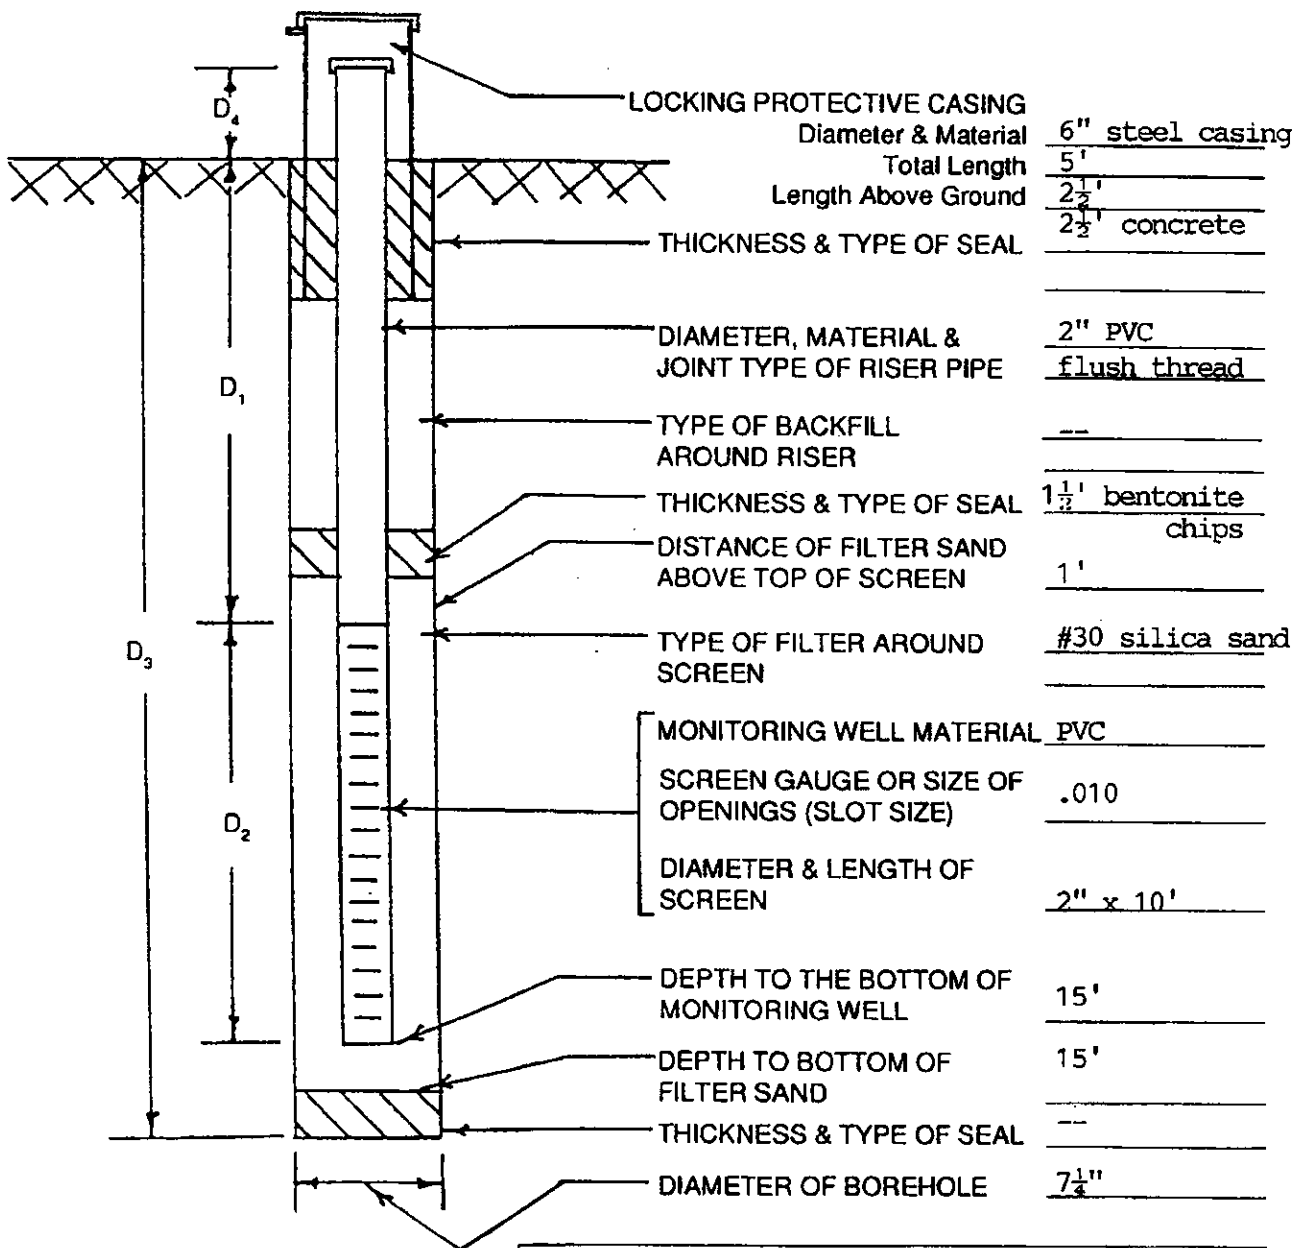

D₁ = 5' ft
 D₂ = 10' ft
 D₃ = 15' ft
 D₄ = 2.5' ft

WATER LEVEL MEASUREMENTS

Date	Time	Water Level (below top of riser)	Water Elevation

RECEIVED

MAY 07 2026

OFFICE OF
WATER



GEOTEK ENGINEERING & TESTING SERVICES, INC.