

## SOUTH DAKOTA WELL AND TEST HOLE PLUGGING REPORT


10-85

Location 1/4 SW 1/4 Sec 25 Twp 102N Rg 50W

County

Minnehaha

Please mark well location with an "X"

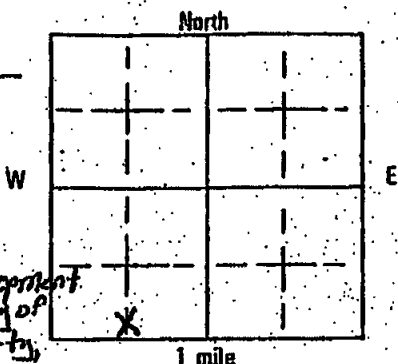

Well Owner:

Name Wal-Mart Stores, Inc.Address 2001 SE 10th St. Mail Drop 5510Bentonsville, AR 72716-0315Plugging completion Date 10/10/13

## CHECK APPROPRIATE BOX

EXISTING WELL



TEST HOLE



Well depth

100'

Casing material

Steel

Casing size(s)

4"

Casing condition

Good

Hole depth

Hole size

RECEIVED

OCT 28 2013

WATER RIGHTS PROGRAM

Describe plugging procedure: Clean sand placed from 100' to 50'. Bentonite medium chips from 50' to 44' (hydrated). Neat Cement from 44' to 4'. Natural material from 4' to surface. Note: Casing was broke off 4' below grade before abandonment by others.

Describe grout or plugging material: Neat cement mixed 94 lbs to 6 gals H<sub>2</sub>O.

Type of non-slip plug:

Bentonite Medium Chips

This well or test hole was plugged under license #

6017

And this report is true and accurate.

Drilling firm

American Technical Services

Signature of Licensed Representative

[Signature]

Signature of Well Owner

[Signature]

Date

10/21/13