

ASAP!

SD EForm - 1621LD V1


SOUTH DAKOTA WATER WELL COMPLETION REPORT

11-02

SE 1/4 SE 1/4 Sec 10 Twp 9N Rg 100

Bon Homme North

Please mark well location with an "X"

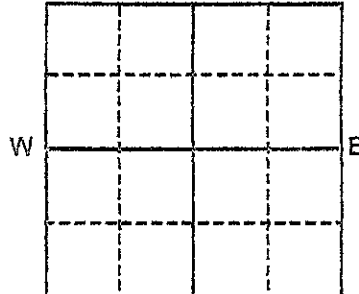

Well Completion Date

10-22-25

1 Mile

Distances to nearest potential pollution sources (septic tank, abandoned well, feed lot, etc.)?
NONE ft. from (Identify source)

PROPOSED USE:

☒ Domestic/Stock Irrigation ☐ Municipal Industrial ☐ Business Institutional ☐ Test holes Monitoring well

METHOD OF DRILLING:

Mud Rotary

CASING DATA:

If other describe ☐ Steel ☒ Plastic ☐ Other

PIPEWEIGHT	DIAMETER	FROM	TO	HOLE DIAMETER
<u>2.50</u> LB/FT	<u>5</u> IN	<u>100</u> FT	<u>370</u> FT	<u>7.78</u> IN
<u>2.50</u> LB/FT	<u>5</u> IN	<u>0</u> FT	<u>100</u> FT	<u>7.78</u> IN
LB/FT	IN	FT	FT	IN

GROUTING DATA:

Grout Type	No. of Sacks	Grout Weight	From	To
<u>±20</u>	<u>12</u>	Lb/gal	<u>0</u> Ft	<u>285</u> Ft
		Lb/gal	Ft	Ft

Describe grouting procedure

Tremie Pipe

SCREEN:

☐ Perforated pipe ☒ Manufactured

Diameter 5 inches Length 60 Feet

Material PVC

Slot Size 1/25 Set From 290 Feet to 350 Feet

Other information

WAS A PACKER OR SEAL USED? ☒ Yes ☐ No

If so, what material? Emulac Plug

Describe packer(s) and location above screen

DISINFECTION: Was well disinfected upon completion?

☒ Yes, How? Chlorine

☐ No, Why Not?

Lab to which water quality sample sent for analysis

Well Owner: Dave Guthmiller

Business Name:

Address: 29065 414 Ave

City, State, Zip: Southland SD 57054

WELL LOG:

FORMATION	DEPTH	
	FROM	TO
<u>Top Soil</u>	<u>0</u>	<u>1</u>
<u>yellow sandy clay</u>	<u>1</u>	<u>25</u>
<u>Blue clay</u>	<u>25</u>	<u>115</u>
<u>Shale</u>	<u>115</u>	<u>255</u>
<u>Chalk</u>	<u>255</u>	<u>285</u>
<u>Shale</u>	<u>285</u>	<u>305</u>
<u>Codell</u>	<u>305</u>	<u>350</u>

STATIC WATER LEVEL

156 FEET

If flowing: closed in pressure

PSI

GPM flow through inch pipe

Controlled by ☐ Valve ☐ Reducers ☐ Other

Reduced flow rate GPM

Can well be completely shut in?

WELL TEST DATA:

☒ Pumped Describe: Submersible

☐ Bailed

☐ Other

Pumping Level Below Land Surface

164 Ft. After 8 Hrs. pumped 11 GPM

Ft. After Hrs. pumped GPM

If pump installed, pump rate: GPM

REMARKS

This well was drilled under license # 722 and this report is true and accurate.

Drilling firm: Stretch's Well Service Inc

Signature of License Representative

Mark Stutzman

Signature of Well Owner or Equitable Property Holder:

Kyle Guthmiller

Date: 5/11/26

RECEIVED

MAY 28 2026

OFFICE OF WATER